

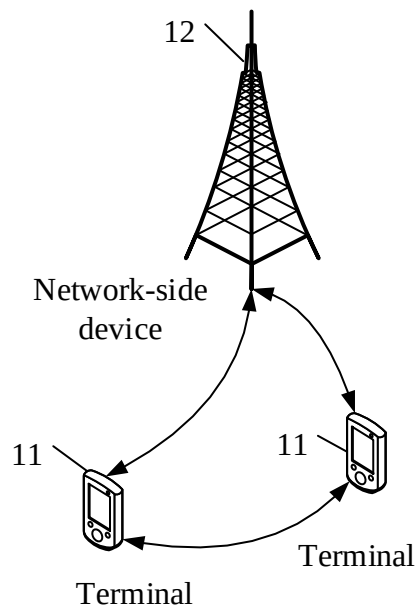


FIG. 1

200

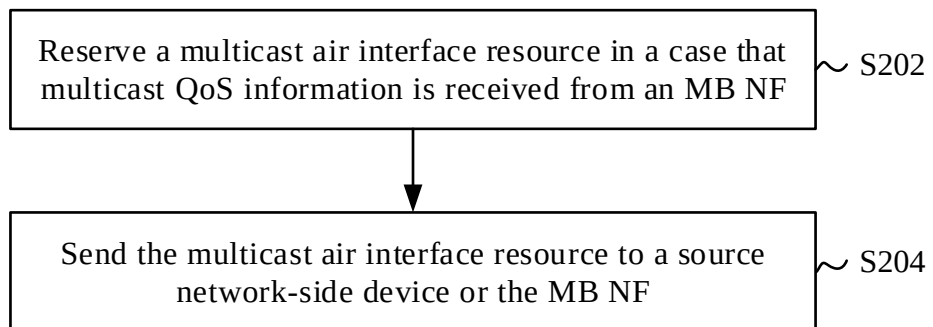


FIG. 2

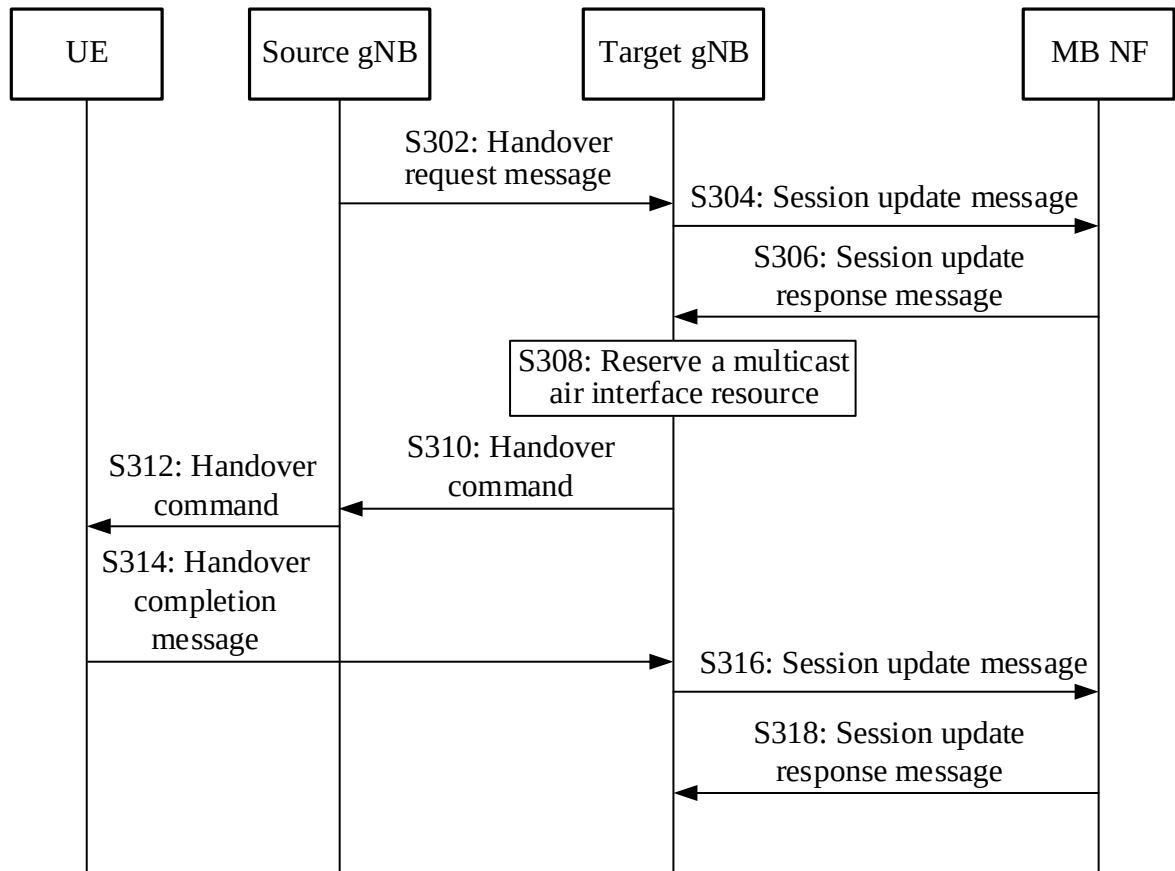


FIG. 3

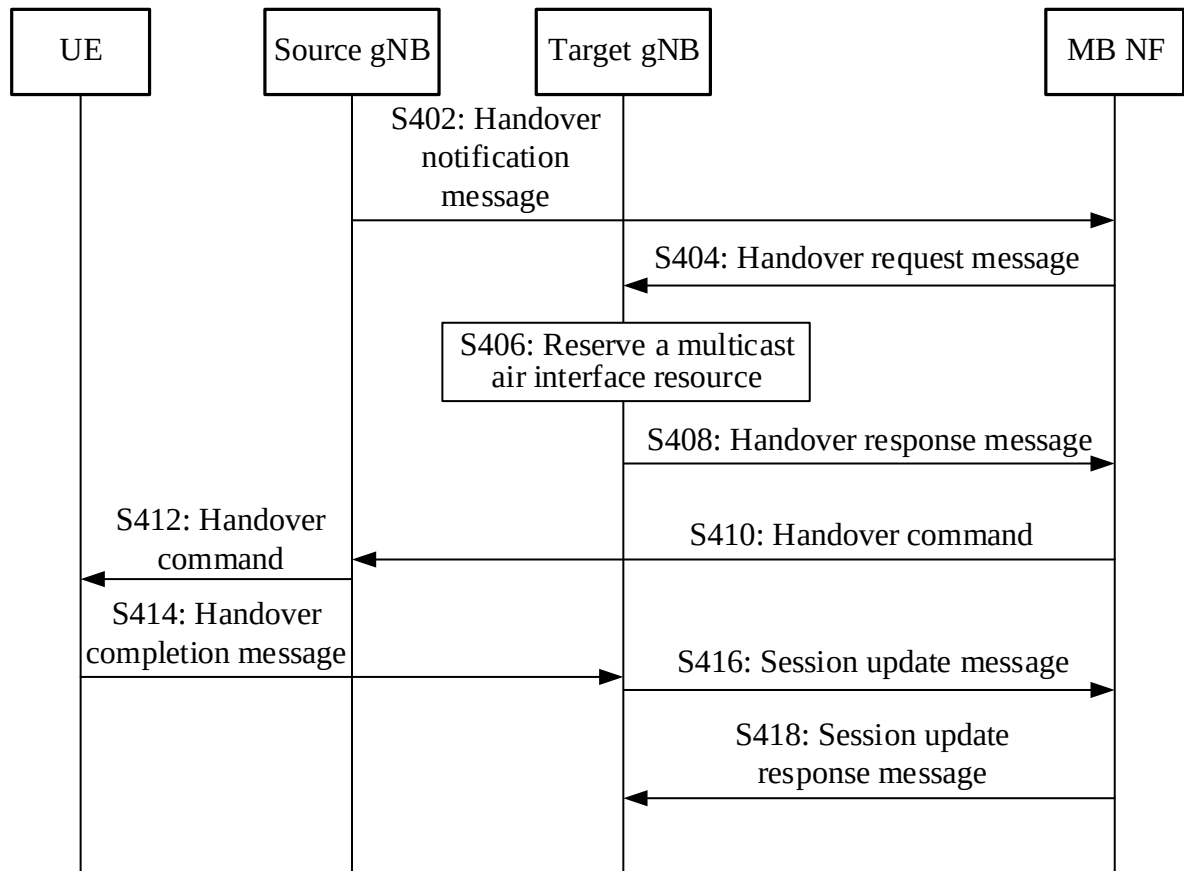


FIG. 4

500

Send multicast QoS information to a target network-side device, where the multicast QoS information is used for the target network-side device to reserve a multicast air interface resource

S502

FIG. 5

600

Receive a multicast air interface resource, where the multicast air interface resource is reserved by a target network-side device in a case that multicast QoS information is received from an MB NF

S602

FIG. 6

700

Receive a multicast air interface resource, where the multicast air interface resource is reserved by a target network-side device in a case that multicast QoS information is received from an MB NF

S702

FIG. 7

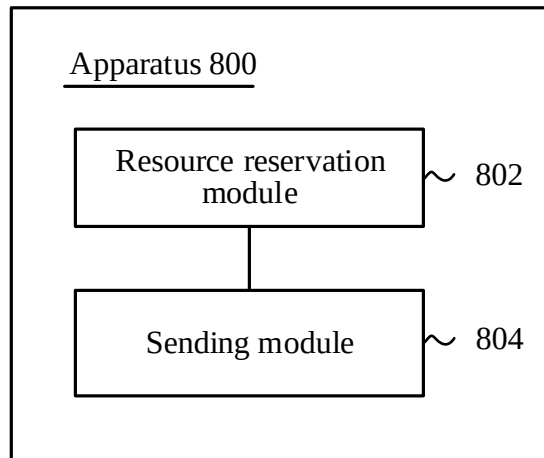


FIG. 8

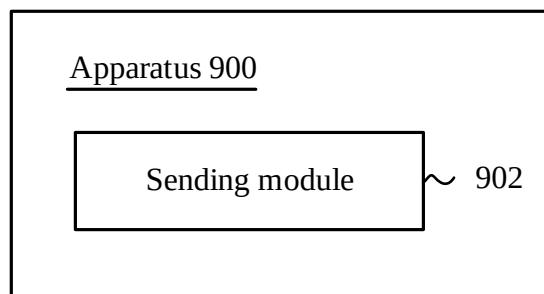


FIG. 9

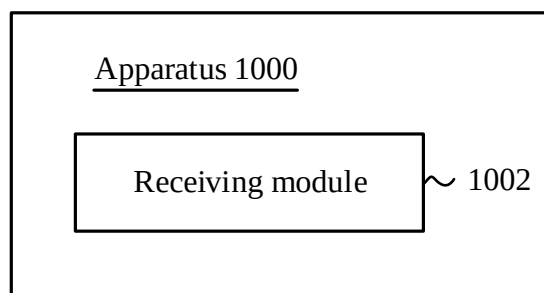


FIG. 10

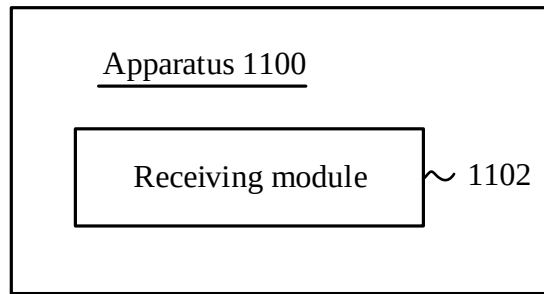


FIG. 11

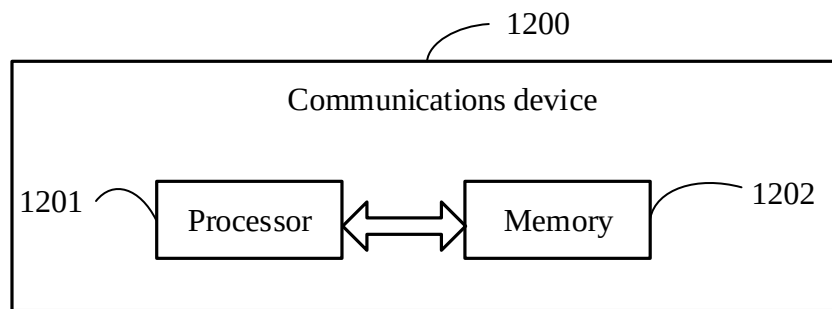


FIG. 12

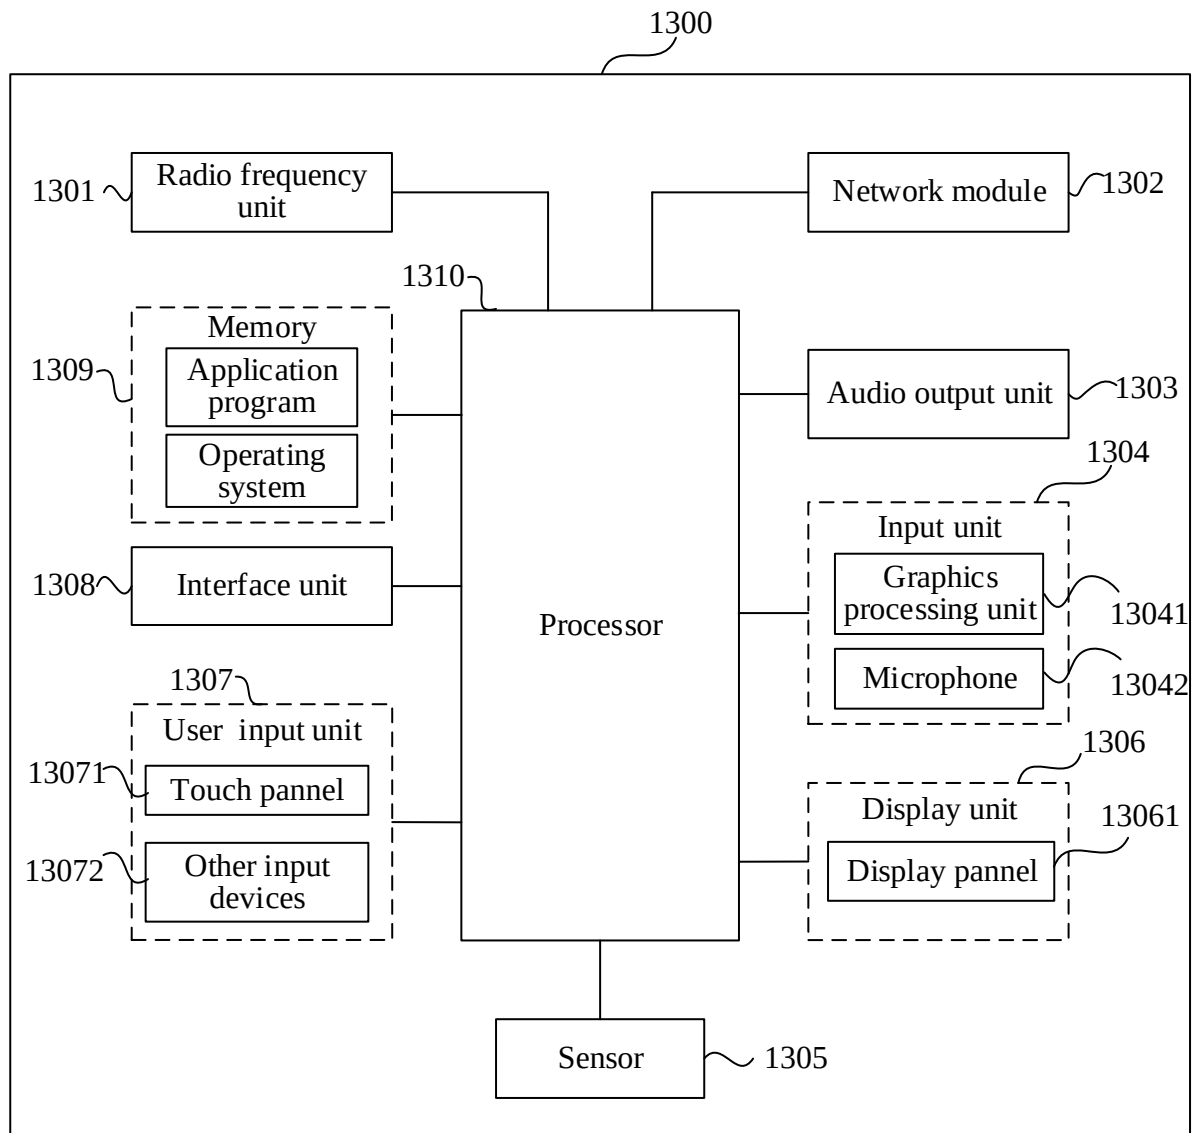


FIG. 13

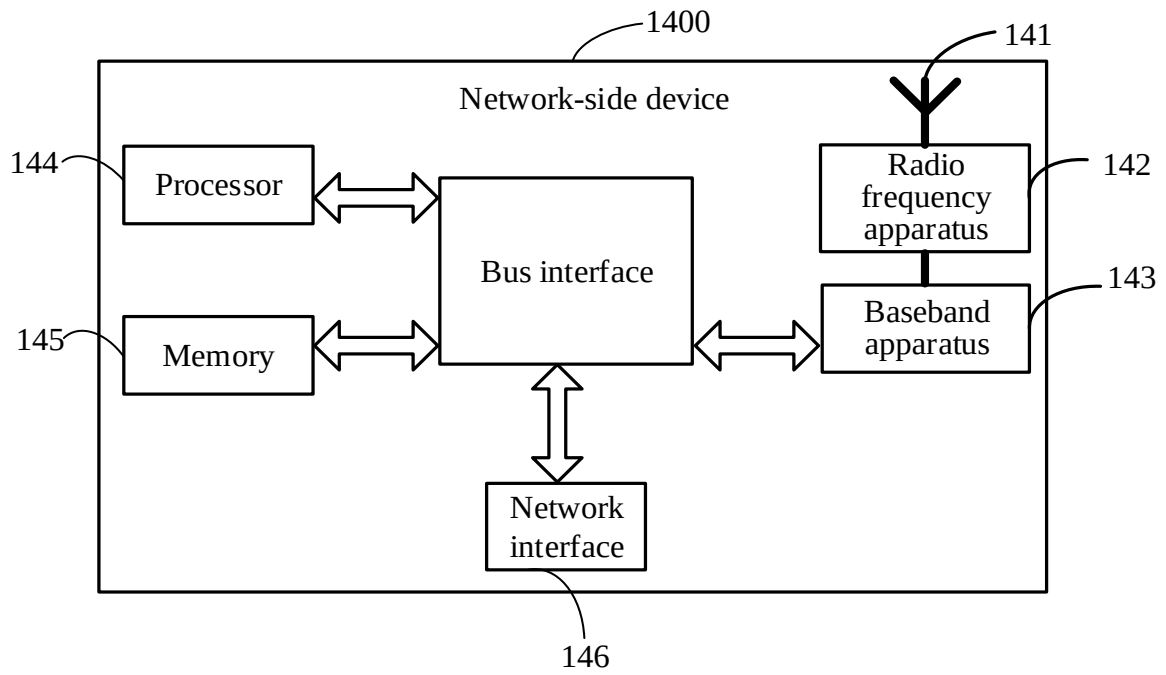


FIG. 14