

01-2768A

PREPARATION OF PALLADIUM-GOLD CATALYST

FIELD OF THE INVENTION

5 The invention relates to a method of preparing a palladium-gold catalyst containing a titania extrudate.

BACKGROUND OF THE INVENTION

10 Palladium-gold catalysts are useful in the oxidation of ethylene or propylene in the presence of acetic acid to produce vinyl acetate or allyl acetate. Acetoxylation is commonly conducted in the vapor phase using a supported palladium-gold catalyst. Palladium-gold catalysts containing titania carriers are known (U.S. Pat. No. 6,022,823; U.S. Pat. Appl. Pub. Nos. 2008/0146721 and 2008/0281122; co-pending application serial number 11/801,935 filed May 11, 2007). Acetoxylation is
15 preferably conducted in a fixed-bed reactor.

 Commercially, titania is produced as a fine powder. To prepare catalysts suitable for fixed-bed reactions, it is necessary to form titania powder into particles, such as spheres, tablets, extrudates, and the like. Despite many efforts in developing methods for producing titania extrudates in the past, many are not
20 suitable for commercial production because of their poor processibility. Therefore, there is a continued need to develop new processes for making titania extrudates that can be used as carriers for palladium-gold catalysts (see, e.g., co-pending application Docket No. 01-2767A [serial number has not yet been assigned] filed on December 16, 2009).

25

SUMMARY OF THE INVENTION


 The invention is a method for preparing a palladium-gold catalyst. The method comprises (a) mixing titania, a carboxyalkyl cellulose, and a hydroxyalkyl cellulose to form a dough; (b) extruding the dough to produce an extrudate; (c)
30 calcining the extrudate to produce a calcined extrudate; (d) impregnating the calcined extrudate with a palladium compound and a gold compound to produce an impregnated extrudate; and (e) calcining the impregnated extrudate to produce the palladium-gold catalyst. The invention also includes a process for producing vinyl

acetate comprising reacting ethylene, oxygen, and acetic acid in the presence of a palladium-gold catalyst.

DETAILED DESCRIPTION OF THE INVENTION

The invention is a method for preparing a palladium-gold catalyst containing a titania carrier. The method comprises mixing titania, a carboxyalkyl cellulose, and a hydroxyalkyl cellulose to form a dough. Suitable titanias can be rutile, anatase, brookite, or a mixture of them. Preferably the titania is an anatase. Titanias may be produced by the chloride process, the sulfate process, the hydrothermal process, or the flame hydrolysis of titanium tetrachloride. Examples of suitable titanias include TiONA® DT-51, DT-52, DT-51D, DT-40, and DT-20 of Millennium Inorganic Chemicals.


Cellulose is an organic compound with the formula $(C_6H_{10}O_5)_n$, a polysaccharide consisting of a linear chain of β -1,4-linkages, as shown in Scheme I, where $n = 50$ to $20,000$. Cellulose is the structural component of the primary cell wall of green plants. Cellulose can be converted into many derivatives.

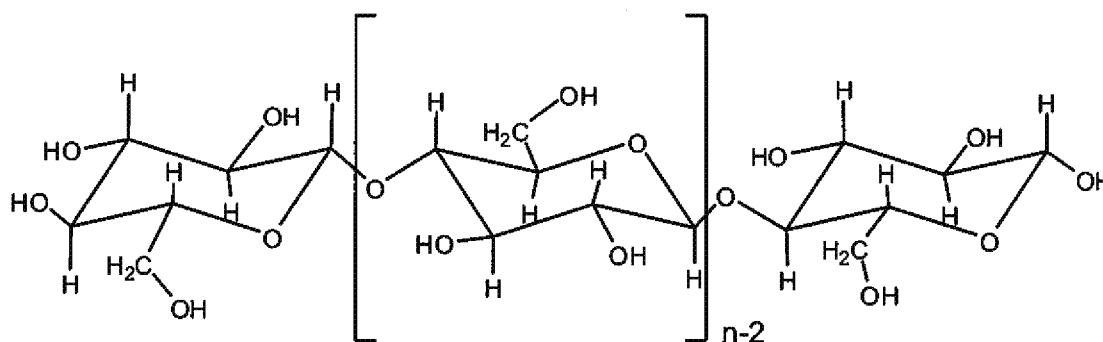

Scheme I

The method uses a carboxyalkyl cellulose. A carboxyalkyl cellulose is a cellulose derivative with carboxyalkyl groups bound to some of the hydroxyl groups of the glucopyranose monomers that make up the cellulose backbone, as shown in Scheme II, where $R = H$, carboxylalkyl, and $m = 50$ to $20,000$. It is often used as its sodium salt, sodium carboxyalkyl cellulose. The functional properties of carboxyalkyl celluloses depend on the degree of substitution of the cellulose structure (i.e., how many of the hydroxyl groups are substituted), as well as the

chain length of the cellulose backbone and the degree of clustering of the substituents. The average number of substituted hydroxyl groups per glucose unit in cellulose derivatives is referred to as the degree of substitution (DS). Complete substitution would provide a DS of 3. Preferably, a carboxymethyl celluloses is used. Preferred carboxymethyl celluloses have a degree of substitution of 0.5 to 0.9 (D. B. Braun and M. R. Rosen, Rheology Modifiers Handbook: Practical Use and Applications (2000) William Andrew Publishing, pp. 109-131). Carboxymethyl celluloses are known as extrusion aids (U.S. Pat. Nos. 5,884,138 and 6,709,570; U.S. Pat. Appl. Pub. No. 2008/0146721).

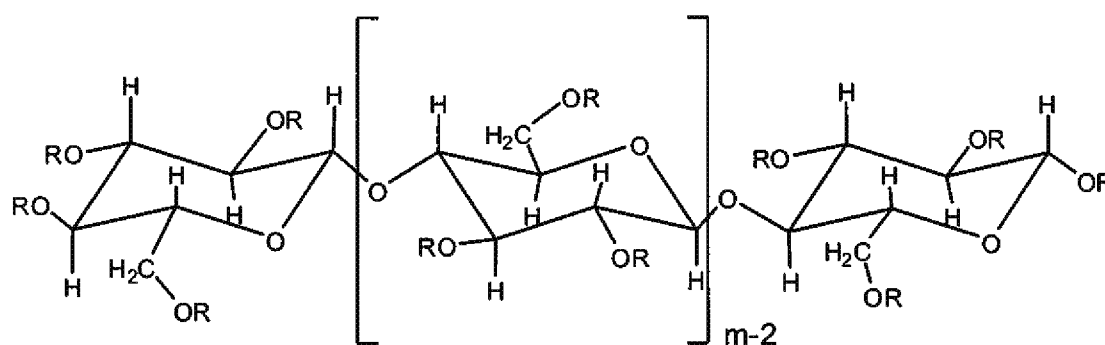

Carboxyalkyl cellulose, R = H, alkyl
Hydroxyalkyl cellulose, R = H, alkyl, hydroxyalkyl

Scheme II

The method also uses a hydroxyalkyl cellulose. A hydroxyalkyl cellulose is a derivative of cellulose in which some of the hydroxyl groups in the repeating glucose units are hydroxyalkylated. Some of the hydroxyl groups in a hydroxyalkyl cellulose may also be alkylated. A typical structure of a hydroxyalkyl cellulose is shown in Scheme III, where R = H, alkyl, hydroxyalkyl, and m = 50 to 20,000.

Preferably the hydroxyalkyl group is selected from the group consisting of 2-hydroxyethyl, 2-hydroxypropyl, and mixtures thereof. More preferably the hydroxyalkyl cellulose is alkylated. Most preferably, the hydroxyalkyl cellulose is selected from the group consisting of methyl 2-hydroxyethyl cellulose, methyl 2-hydroxypropyl cellulose, and mixtures thereof. Preferably, the degree of methyl substitution is from 1 to 2, more preferably from 1.5 to 1.8; and the 2-hydroxyethyl or 2-hydroxypropyl molar substitution is from 0.1 to 0.3. METHOCEL™ K4M cellulose

derivative, a product of Dow Chemical Company and having a methyl substitution of 1.4 and a hydroxypropyl molar substitution of 0.21, is preferably used. Hydroxyalkyl celluloses are known as extrusion aids (U.S. Pat. Nos. 5,884,138, 6,316,383, and 6,709,570).

5 The weight ratio of the carboxyalkyl cellulose to the titania is preferably from 0.2:100 to 5:100, more preferably from 0.5:100 to 4:100, most preferably from 1:100 to 3:100. The weight ratio of the hydroxyalkyl cellulose to the titania is preferably from 0.1:100 to 2.5:100, more preferably from 0.2:100 to 2:100, most preferably from 0.5:100 to 1:100. The weight ratio of the carboxyalkyl cellulose to the
10 hydroxyalkyl cellulose is preferably from 5:1 to 1:2, more preferably from 3:1 to 1:1.

The method comprises mixing titania, the carboxyalkyl cellulose, and the hydroxyalkyl cellulose to form a dough. If necessary, a solvent may be used. Suitable solvents include water, alcohols, ethers, esters, amides, aromatic compounds, halogenated compounds, and the like, and mixtures thereof. Preferred
15 solvents are water and alcohols.

A titania sol may be used as a source of the titania. A titania sol is a colloidal suspension of titania particles in a liquid. A titania sol can be prepared by hydrolyzing a titania precursor. Suitable titania precursors include titanium salts, titanium halides, titanium alkoxides, titanium oxyhalides, and the like.

20 The method comprises extruding the dough to produce an extrudate by an operation called extrusion. Extrusion is a process in which a dough is pushed through a die or an orifice to create long objects of a fixed cross-section. Extrusion is commonly used to process plastics or food, and to form adsorbents, catalysts, or catalyst carriers. Any conventional extruder may be used. A suitable screw-type
25 extruder is described in "Particle Size Enlargement," Handbook of Powder Technology, vol. 1 (1980) pp. 112-22.

The carboxyalkyl cellulose and the hydroxyalkyl cellulose are used as extrusion aids. An extrusion aid helps the mixing, mulling, and extruding operation and may improve the mechanical and/or physical properties of the extrudate such as
30 crushing strength, surface area, pore size, or pore volume. The extrudate comprising titania, the carboxyalkyl cellulose and the hydroxyalkyl cellulose has a smooth outer surface. They do not tend to stick to each other while being formed, dried, and calcined, which is suitable for large scale production. In addition the

combination of the carboxyalkyl cellulose and the hydroxyalkyl cellulose minimizes "feathering." The term "feathering" means that an extrudate, instead of having a smooth outer surface, exhibits cracks in its surface where small flakes or "feathers" of the extrudate are separated from the surface. "Feathering" not only causes loss of valuable material but also tends to impair the physical strength of an extrudate.

Other extrusion aids may be used to form the dough. Other suitable extrusion aids include alkyl amines, carboxylic acids, alkyl ammonium compounds, amino alcohols, starch, polyacrylates, polymethacrylates, poly(vinyl alcohol)s, poly(vinylpyrrolidone)s, poly(amino acid)s, polyethers, poly(tetrahydrofuran)s, metal carboxylates, and the like, and mixtures thereof. Preferred poly(alkylene oxide)s are poly(ethylene oxide)s, poly(propylene oxide)s, or copolymers of ethylene oxide and propylene oxide. Organic extrusion aids are usually removed by calcination.

The extrudate is optionally dried after it is formed. The drying operation removes at least a portion of the solvents from the extrudate. The drying operation may be performed at 30 to 200°C at atmospheric pressure or under vacuum. The drying may occur in air or an inert atmosphere. Sometimes, it is preferable to raise the drying temperature slowly so the extrudate will not be cracked or weakened.

The method comprises calcining the extrudate to produce a calcined extrudate. Preferably, the calcination is carried out in an oxygen-containing gas to burn off the organic materials (e.g., residual solvent and extrusion aids) contained in the extrudate. The calcination may be carried out at 400 to 1000°C, more preferably from 450 to 800°C, most preferably from 650 to 750°C. Sometimes, it is beneficial to initially calcine the extrudate in an inert atmosphere (e.g., nitrogen, helium) to thermally decompose the organic compounds contained in the extrudate, and then burn off the organic materials in an oxygen-containing gas. Generally, a calcined extrudate after the calcination contains less than 0.5 wt% carbon. Preferably, it contains less than 0.1 wt% carbon.

The method comprises impregnating the calcined extrudate with a palladium compound and a gold compound to produce an impregnated extrudate. Suitable palladium compounds include palladium chloride, sodium chloropalladate, palladium nitrate, palladium sulfate, the like, and mixtures thereof. Suitable gold compounds include auric chloride, tetrachloroauric acid, sodium tetrachloroaurate, the like, and mixtures thereof.

The impregnated extrudate may comprise from 0.1 wt% to 3 wt% of palladium and from 0.1 wt% to 3 wt% of gold and has a weight ratio of palladium to gold within the range of 5:1 to 1:3. More preferably, the impregnated extrudate comprises 0.5 wt% to 1.5 wt% of palladium and 0.25 wt% to 0.75 wt% of gold.

5 A fixing agent may preferably be added to the extrudate while it is being impregnated. Fixing agents help to bind the palladium compound and the gold compound to the extrudate. Suitable fixing agents include alkali metal, alkaline earth metal, or ammonium compounds, for example, their hydroxides, carbonates, bicarbonates, metasilicates, and the like, and mixtures thereof.

10 Any suitable impregnation method can be used to produce the impregnated extrudate. The calcined extrudate may be simultaneously or successively impregnated with the palladium compound, the gold compound, and optionally a fixing agent. Preferably it is impregnated with aqueous solutions although other impregnating solvents may be used.

15 The impregnated extrudate is preferably washed with water or other solvents to remove any halide (e.g., chloride) from the extrudate.

The method optionally comprises drying the impregnated extrudate. Typically the impregnated extrudate can be dried at 50 to 150°C at atmospheric pressure or under vacuum, primarily to remove at least a portion of the solvents. The drying
20 may occur in air or an inert gas at atmospheric pressure or under vacuum. Sometimes, it is important to raise the drying temperature slowly to prevent the extrudate from losing its mechanical strength.

The method comprises calcining the impregnated extrudate, preferably after it is dried first, to produce the palladium-gold catalyst. Generally, the calcination of the
25 impregnated extrudate occurs at an elevated temperature in a non-reducing atmosphere. Preferably, the calcination of the impregnated extrudate is carried out at a temperature of 150 to 600°C. Suitable non-reducing gases used for the calcination include inert or oxidizing gases such as helium, nitrogen, argon, neon, oxygen, air, carbon dioxide, the like, and mixtures thereof. Preferably the calcination
30 is carried out in an atmosphere of nitrogen, oxygen, or air, or mixtures thereof.

The palladium-gold catalyst obtained from the calcination step is preferably chemically reduced to generate a reduced palladium-gold catalyst. The reduction is usually performed by contacting the palladium-gold catalyst with a reducing agent.

Suitable reducing agents include hydrogen, carbon monoxide, hydrocarbons, olefins, aldehydes, alcohols, hydrazine, the like, and mixtures thereof. Hydrogen, ethylene, propylene, alkaline hydrazine and alkaline formaldehyde are preferred reducing agents and ethylene and hydrogen are particularly preferred. Temperatures employed for the reduction can range from 20 to 700°C. If hydrogen is the reducing agent, a gas mixture containing hydrogen and another gas such as argon, helium, nitrogen, or the like, is usually used. The reduction temperature with hydrogen is preferably in the range of 300 to 700°C, more preferably in the range of 450 to 550°C.

The palladium-gold catalyst prepared according to the invention can be used for the acetoxylation of an olefin, such as ethylene or propylene, to produce an acetoxylated olefin such as vinyl acetate or allyl acetate. Preferably, a promoted palladium-gold catalyst, which can be produced by adding an activator to the reduced palladium-gold catalyst, is used in the acetoxylation reaction. An activator is an alkali or alkaline earth metal compound, examples of which are hydroxides, acetates, nitrates, carbonates, and bicarbonates of potassium, sodium, cesium, magnesium, barium, and the like. Potassium salts are preferred activators. The activator content may be in the range of 0 to 15 wt%, preferably 1.5 to 10 wt% of the catalyst.

The invention also include a process for preparing vinyl acetate, comprising reacting a feed comprising ethylene, oxygen, and acetic acid in the presence of the palladium-gold catalyst, preferably in the presence of the reduced palladium-gold catalyst, more preferably in the presence of the promoted palladium-gold catalyst.

The feed typically comprise 20 to 70 mol% ethylene, 2 to 8 mol% oxygen, and 2 to 20 mol% acetic acid. The feed may comprise a diluent. Examples of suitable diluents include propane, nitrogen, helium, argon, carbon dioxide, the like, and mixtures thereof.

The reaction is generally performed at a temperature in the range of 100 to 250°C, preferably 125 to 200°C and under a pressure of 15 to 500 psig.

EXAMPLE 1

D-T51 titania (2500 g), a high-purity WALOCEL™ C sodium carboxymethyl cellulose (The Dow Chemical Company, 52.5 g), poly(ethylene oxide) (MW =

100,000, 35 g), and a cellulose derivative (METHOCEL™ K4M, 25 g) are mixed in an Eirich mixer for 5 min. Water (1005 g), an aqueous ammonium hydroxide (14.8 M, 100 g), and benzyl alcohol (17.5 g) are added into the mixer. They are mixed for 5 min at the "low" speed setting, then for 10 min at the "high" speed setting. The dough produced is placed in the hopper of a Bonnot 2-inch extruder (The Bonnot Company) equipped with a die face of 25 holes with a diameter of 1/8 inch. The extrusion is performed at a rate of approximately 0.25 kg/min. The extrudates produced have smooth outer surface and there is minimal sticking each other occurring. Almost no feathering is observed.

The extrudates are piled 1 inch deep on a collection tray and dried in air at 80°C for 12 h. Then they are calcined in air. The calcination temperature is raised from room temperature to 500°C at a rate of 2°C/min, held at 500°C for 2 h, raised from 500°C to 700°C at a rate of 10°C/min, held at 700°C for 3 h, then lowered to room temperature.

Some physical properties of the calcined titania extrudate are listed in Table 1. The crush strength of the calcined titania extrudate is measured with a Chatillon crush strength analyzer (Model DPP 50). The force necessary for failure in 25 measurements is averaged to give the reported value. Bulk density is measured by placing 40 g of the calcined extrudates in a 100-mL graduated cylinder (1" nominal outer diameter). The graduated cylinder is tapped until the apparent volume no longer changes, and then this value is divided into the mass to calculate the bulk density. Voidage is determined by adding the pellets to 50 mL water in a second graduated cylinder and then tapping until all voids are filled. The resulting water level is subtracted from the total volume of the water and the pellets taken separately to determine the void volume occupied by water. Total pore volume is determined by pouring the mixture through a sieve basket, shaking to remove excess water and then weighing the wet extrudates. The increase in mass over the initial 40 g of extrudates divided by the density of water is taken as the measure of the pore volume.

COMPARATIVE EXAMPLE 2

The procedure of Example 1 is repeated with the formulation shown in Table 1. The extrudates are droopy as they exit the die face of the extruder and tend to stick to each other as they lay on the collection tray.

COMPARATIVE EXAMPLE 3

The procedure of Example 1 is repeated with the formulation shown in Table

1. The extrudates are droopy as they exit the die face of the extruder and tend to
 5 stick to each other as they lay on the collection tray.

Table 1

Example	1	C. 2	C. 3
Formulation			
DT-51 Titania (g)	2500	2500	2500
Water (g)	1005	1250	1005
Poly(ethylene oxide) (g)	35	35	35
WALOCEL™ C cellulose (g)	52.5	52.5	52.5
Benzyl alcohol (g)	17.5	17.5	17.5
Ammonium hydroxide (g)	100	100	100
METHOCEL™ K4M cellulose (g)	25	0	0
Extrusion Processability	good	poor	poor
Properties of Calcined Extrudate			
Crushing strength (lb/mm)	1.68	1.37	1.43
Surface area (m ² /g)	27.2	n/a	n/a
Pore volume (mL/g)	0.32	0.30	0.30

COMPARATIVE EXAMPLE 4

The procedure of Example 1 is repeated, except that the formulation is as
 10 follows: DT-51 (2000 g), TAMOL™ 1124 dispersant (a hydrophilic polyelectrolyte
 copolymer from The Dow Chemical Company, 32.6 g), METHOCEL™ K4M cellulose
 derivative (54.6 g), lactic acid (6 g), water (950 g), aqueous ammonium hydroxide
 (14.8 M, 70 g).

COMPARATIVE EXAMPLE 5

15 The procedure of Example 4 is repeated, except that alumina (DISPERAL®
 P2, available from Sasol, 20 g) is used. The extrudates are droopy as they exit the
 die face of the extruder and tend to stick to each other as they lay on a metal tray.
 The calcined extrudate contains 1 wt% alumina and 99 wt% titania.

Table 2

Example	C. 4	C. 5
Formulation		
DT-51 titania (g)	2000	2000
METHOCEL™ K4M cellulose (g)	54.6	54.6
TAMOL™ 1124 dispersant (g)	32.6	32.6
Water (g)	950	950
Ammonium hydroxide solution (g)	70	70
DISPERAL® P2 alumina (g)	0	20
Lactic acid (g)	60	60
Extrusion Processibility	poor	poor

EXAMPLE 6

The procedure of Example 1 is repeated, except that the formulation is as follows: DT51 (300 g), TAMOL™ 1124 dispersant (5 g), WALOCEL™ C cellulose (6 g), METHOCEL™ K4M cellulose derivative (6 g), lactic acid (4.5 g), water (155 g), and aqueous ammonium hydroxide (14.8 M, 11 g). The extrudates have smooth outer surface. Minimal feathering is observed. Almost no extrudate is observed to stick to others.

COMPARATIVE EXAMPLE 7

The procedure of Example 6 is repeated, except that the formulation is shown in Table 3. The extrudates slump upon exiting the die. They stick to each other on the collection tray.

COMPARATIVE EXAMPLE 8

The procedure of Example 6 is repeated, except that the formulation is shown in Table 3. The extrudates do not tend to stick to each other after laying the on the collection tray. However, they appear to be feathering.

Table 3

Example	6	C. 7	C. 8
Formulation			
DT-51 titania (g)	300	300	300
Water (g)	155	145	145
TAMOL™ 1124 dispersant (g)	5	5	5
WALOCCEL™ C cellulose (g)	6	0	6
Lactic acid (g)	4.5	4.5	4.5
Ammonium hydroxide (g)	11	11	11
METHOCEL™ K4M cellulose (g)	6	6	0
Extrusion Processibility	good	poor	poor

EXAMPLE 9

NaHCO₃ powder (27 g) is slowly added to an aqueous solution containing Na₂PdCl₄•3H₂O (31.4 g), NaAuCl₄•2H₂O (11.3 g), and water (235.4 g). The mixture is stirred at room temperature for 10 min. The solution is sprayed with a pipette on calcined titania extrudates prepared in Example 1 (1000 g) while they are being tumbled in a rotating flask. Once the impregnation is finished, the rotating flask is heated to about 100°C with a heat gun. The impregnated extrudates are tumbled for another 30 min at 100°C, then placed in an oven at 80°C for 2 h before they are cooled to room temperature.

The dried extrudates are washed with warm water (50-80°C) until no chloride can be detected by mixing the wash filtrate solution with a 1 wt% silver nitrate solution to observe precipitation. After washing is finished, the catalyst is dried at 80 to 100°C to remove water. Then they are heated at 230°C for 3 h in air, and at 230°C for 30 min under a nitrogen flow. The temperature is raised to 500°C under a flow of 10 mol% hydrogen in nitrogen gas, and held for 3 h before it is cooled to room temperature.

The extrudates are washed with an aqueous solution containing 10 wt% potassium acetate and 1 wt% potassium hydroxide (10 L). The washed extrudates are dried under nitrogen at 125°C for 2 h. A palladium-gold catalyst is obtained. It contains 0.93 wt% Pd, 0.54 wt% Au, and 1.5 wt% K.

EXAMPLE 10

The palladium-gold catalyst prepared in Example 9 is tested for vinyl acetate production in a fixed-bed reactor (stainless steel, 1 inch O.D.). The reactor is charged with a mixture of the catalyst (10 g) and an inert alpha alumina cylindrical pellets (1/8" in diameter, surface area 4 m²/g, pore volume 0.25 mL/g, 25 g). The feed contains 46.1 mol% helium, 33.9 mol% ethylene, 11.48 mol% acetic acid, 4.2 mol% oxygen, and 4.2 mol% nitrogen. The reactor pressure is 80 psig and the space velocity relative to the volume of the catalyst is 3050 h⁻¹ at standard temperature and pressure. The reactor is cooled using a fluidized sand bath, the temperature of which is set at 130°C. The product stream is analyzed by gas chromatography (GC). Oxygen conversion, oxygen selectivity, oxygen yield to vinyl acetate, and ethylene selectivity to vinyl acetate between 75 to 100 h on stream are calculated from the GC results and listed in Table 4. Oxygen conversion is calculated by dividing the amount of oxygen consumed by the total amount of oxygen fed to the reactor. Oxygen selectivity to vinyl acetate is the amount of oxygen consumed in making vinyl acetate divided by the total amount of oxygen consumed. Oxygen yield to vinyl acetate is the product of oxygen conversion multiplied by oxygen selectivity. Ethylene selectivity to vinyl acetate is the amount of ethylene consumed in making vinyl acetate divided by the total amount of ethylene consumed. Catalyst productivity is the grams of vinyl acetate produced per liter of the catalyst per hour.

Table 4

Oxygen conversion (%)	63.7
Oxygen selectivity to vinyl acetate (%)	86.3
Oxygen yield to vinyl acetate (%)	54.9
Ethylene selectivity to vinyl acetate (%)	97.4
Catalyst productivity (g•L ⁻¹ •h ⁻¹)	492.2

I claim:

1. A method for preparing a palladium-gold catalyst comprising (a) mixing titania, a carboxyalkyl cellulose, and a hydroxyalkyl cellulose to form a dough; (b) extruding the dough to produce an extrudate; and (c) calcining the extrudate to produce a calcined extrudate; (d) impregnating the calcined extrudate with a palladium compound and a gold compound to produce an impregnated extrudate; and (e) calcining the impregnated extrudate to produce the palladium-gold catalyst.
2. The method of claim 1 further comprising reducing the palladium-gold catalyst to produce a reduced catalyst.
3. The method of claim 2 wherein the palladium-gold catalyst is reduced by hydrogen.
4. The method of claim 3 further comprising adding an activator to the reduced catalyst to produce a promoted palladium-gold catalyst.
5. The method of claim 1 wherein the titania is anatase.
6. The method of claim 1 wherein the weight ratio of the carboxyalkyl cellulose to the titania is from 1:100 to 3:100.
7. The method of claim 1 wherein the weight ratio of the hydroxyalkyl cellulose to the titania is from 0.5:100 to 1:100.
8. The method of claim 1 wherein the weight ratio of the carboxyalkyl cellulose to the hydroxyalkyl cellulose is from 3:1 to 1:1.
9. The method of claim 1 wherein the hydroxyalkyl cellulose is selected from the group consisting of methyl 2-hydroxypropyl cellulose, methyl 2-hydroxyethyl cellulose, and mixtures thereof.
10. The method of claim 1 wherein the extrudate is calcined at a temperature of 650 to 750°C.
11. A process for preparing vinyl acetate, comprising reacting ethylene, oxygen, and acetic acid in the presence of a palladium-gold catalyst prepared according to a method comprising (a) mixing titania, a carboxyalkyl cellulose, and a hydroxyalkyl cellulose to form a dough; (b) extruding the dough to produce the extrudate; and (c) calcining the extrudate to produce a calcined extrudate; (d) impregnating the calcined extrudate with a palladium compound and a gold compound to produce an impregnated extrudate; (e) calcining the impregnated extrudate to produce the palladium-gold catalyst.

12. The process of claim 11 wherein the palladium-gold catalyst is further reduced.

13. The process of claim 12 wherein the palladium-gold catalyst is reduced by hydrogen.

14. The process of claim 13 wherein the reduced catalyst is further promoted by an activator.

15. The process of claim 11 wherein the titania is anatase.