



- (51) International Patent Classification:
B63B 43/06 (2006.01)
- (21) International Application Number:
PCT/EP2014/052780
- (22) International Filing Date:
13 February 2014 (13.02.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20130274 15 February 2013 (15.02.2013) NO
61/765,187 15 February 2013 (15.02.2013) US
- (71) Applicant: GVA CONSULTANTS AB [SE/SE]; P.O.
Box 11450, S-404 29 Göteborg (SE).
- (72) Inventor: LIBERG, Lars-Olof; Älgö 6, S-452 95 Ström-
stad (SE).
- (74) Agent: VALEA AB; Box 1098, S-405 23 Göteborg (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CLOSED INCLINATION CHANGE SYSTEM

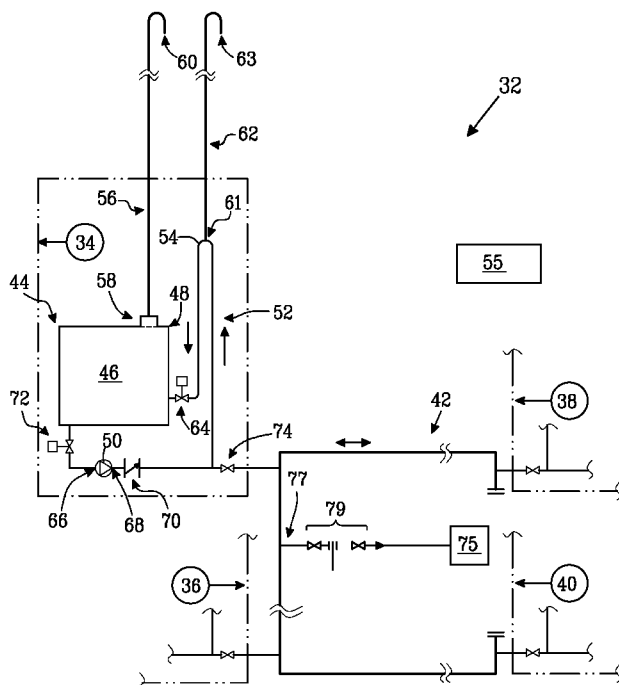


Fig. 2

(57) Abstract: The present disclosure relates to a closed inclination change system (32) for a floating unit (10). The inclination change system comprises a plurality of inclination change assemblies (34, 36, 38, 40) and each one of the inclination change assemblies (34, 36, 38, 40) is adapted to be in fluid communication with each one of the other inclination change assemblies (34, 36, 38, 40). Each one of the inclination change assemblies (34, 36, 38, 40) comprises a tank assembly (44) comprising a first tank (46), the tank assembly (44) comprising a tank assembly top portion (48). Moreover, each one of the inclination change assemblies (34, 36, 38, 40) further comprises: - a pump assembly (50) arranged to pump the fluid from the tank assembly (44), and - an inlet conduit assembly (52) adapted to guide the fluid into the tank assembly (44) from another inclination change assembly (34, 36, 38, 40), the inlet conduit assembly (52) having a conduit top portion (54) that is located above the tank assembly top portion (48).

WO 2014/125001 A1



Published:

— *with international search report (Art. 21(3))*