

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
17 November 2011 (17.11.2011)(10) International Publication Number
WO 2011/143418 A1

(51) International Patent Classification:

C10M 141/12 (2006.01) C10N 30/06 (2006.01)
C10M 163/00 (2006.01) C10N 40/25 (2006.01)
C10N 30/04 (2006.01) C10N 60/14 (2006.01)

(21) International Application Number:

PCT/US2011/036238

(22) International Filing Date:

12 May 2011 (12.05.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/333,937 12 May 2010 (12.05.2010) US
13/105,376 11 May 2011 (11.05.2011) US

(71) Applicant (for all designated States except US):

EXXONMOBIL RESEARCH AND ENGINEERING COMPANY [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FARNG, Liegpao, O.** [US/US]; 22 Evans Lane, Lawrenceville, NJ 08648 (US). **DECKMAN, Douglas, E.** [US/US]; 5 Peachtree Lane, Mullica Hill, NJ 08062 (US). **HORODYSKY, Andrew, G.** [US/US]; 139 Weston Drive, Cherry Hill, NJ

08003 (US). **BUCK, William, H.** [US/US]; 1122 Independence Drive, West Chester, PA 19382 (US).

(74) Agents: **PURWIN, Paul, E.** et al.; Exxonmobil Research and Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, New Jersey 08801-0900 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD FOR REDUCING ONE OR MORE OF DEPOSITS AND FRICTION OF A LUBRICATING OIL

Figure 1

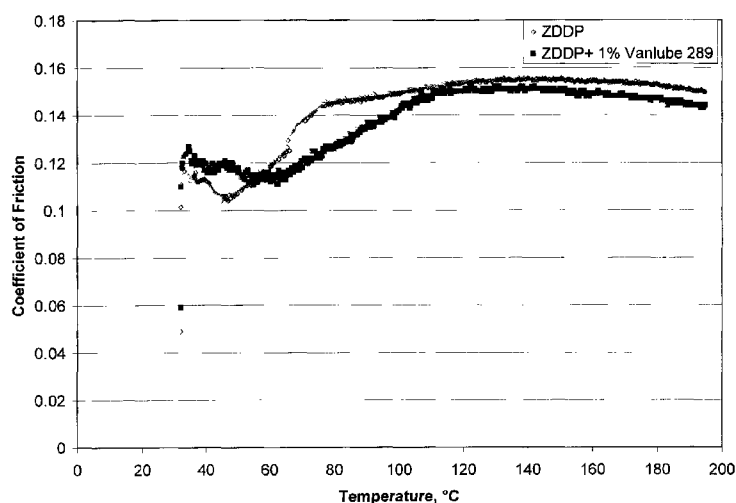

(57) Abstract: The present invention is directed to a method for improving one or more of the control of deposit formation and friction in an engine lubricated using a lubricating oil comprising a base oil and additives by employing as the additive the necessary combination of a borated hydroxyl saturated hydrocarbyl ester amide-amine mixture, zinc dialkyl dithiophosphate, and metal salicylate detergent, the deposit formation and friction being improved as compared to a lubricating oil containing the borated hydroxyl saturated hydrocarbyl ester amide-amine mixture, zinc dialkyl dithiophosphate and a detergent other than metal salicylate, such as metal phosphate and/or metal sulfonate.

WO 2011/143418 A1



Published:

— *with international search report (Art. 21(3))*