
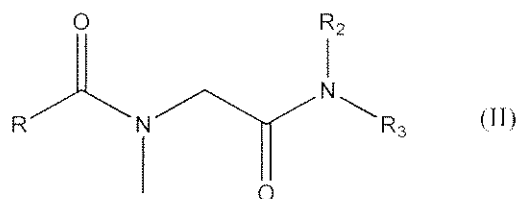


### ABSTRACT OF THE DISCLOSURE



A lubricating oil comprising a major amount of base oil and a minor amount of an additive package comprising a friction modifier component selected from:

(A) one or more friction modifiers of the formulae I and II:

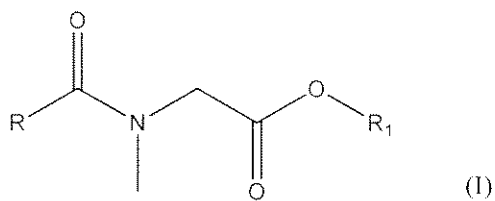

wherein R is a linear or branched, saturated, unsaturated, or partially saturated hydrocarbyl group having about 8 to about 22 carbon atoms, R<sub>1</sub> is a hydrocarbyl having from about 1 to about 8 carbon atoms or a C<sub>1</sub>-C<sub>8</sub> hydrocarbyl group containing one or more heteroatoms and R<sub>2</sub> and R<sub>3</sub> are independently selected from hydrogen, C<sub>1</sub>-C<sub>18</sub> hydrocarbyl groups, and C<sub>1</sub>-C<sub>18</sub> hydrocarbyl groups containing one or more heteroatoms;

(B) two or more friction modifiers independently selected from the formulae III and IV:

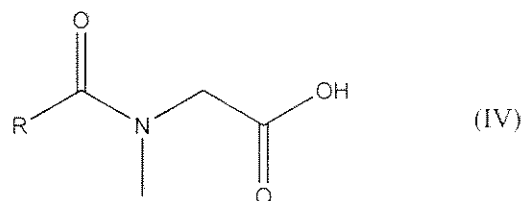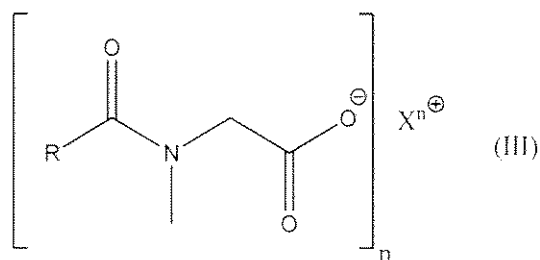

wherein R is as defined above; and X is an alkali metal, alkaline earth metal or ammonium cation and n is the valence of cation X; and

(C) at least one friction modifier of the formulae III and IV in combination with at least one friction modifier of the formulae I and II.