

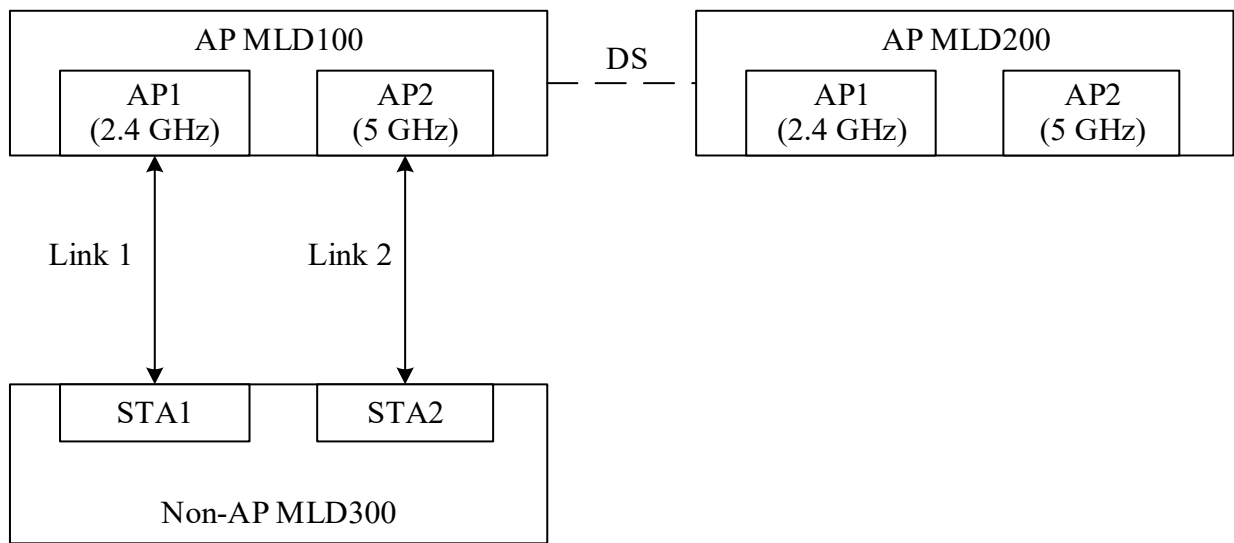


FIG. 1

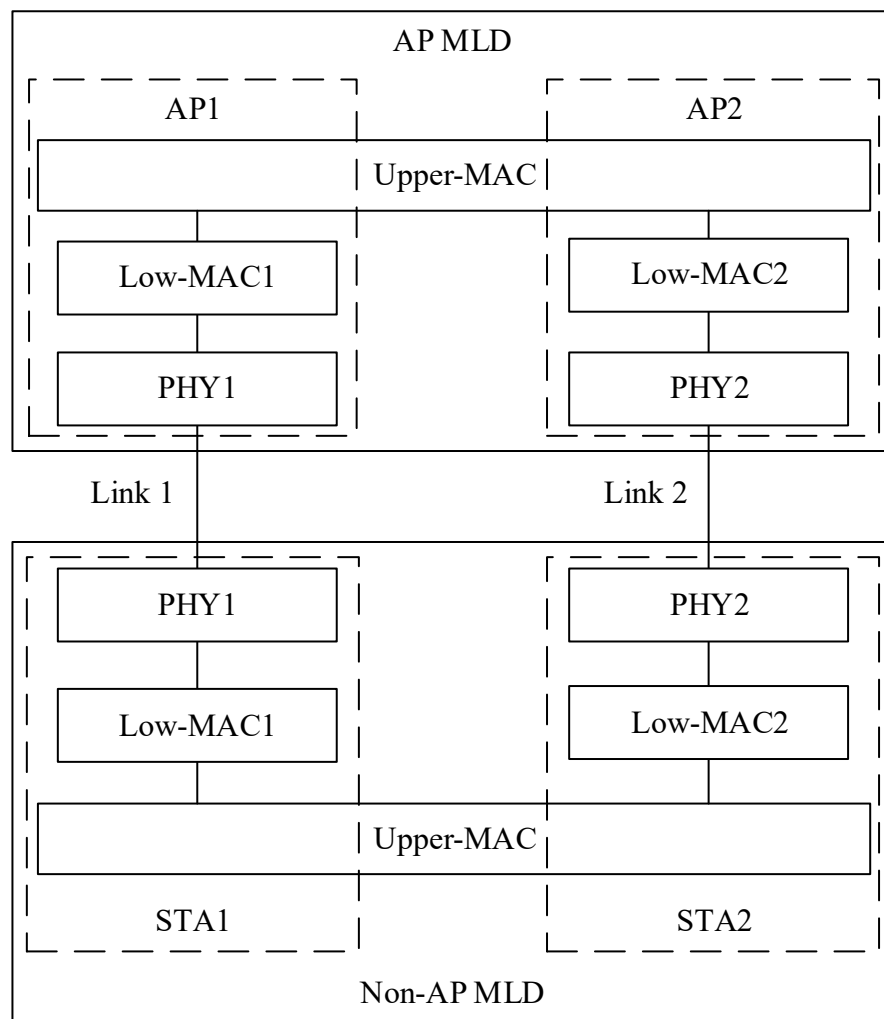


FIG. 2

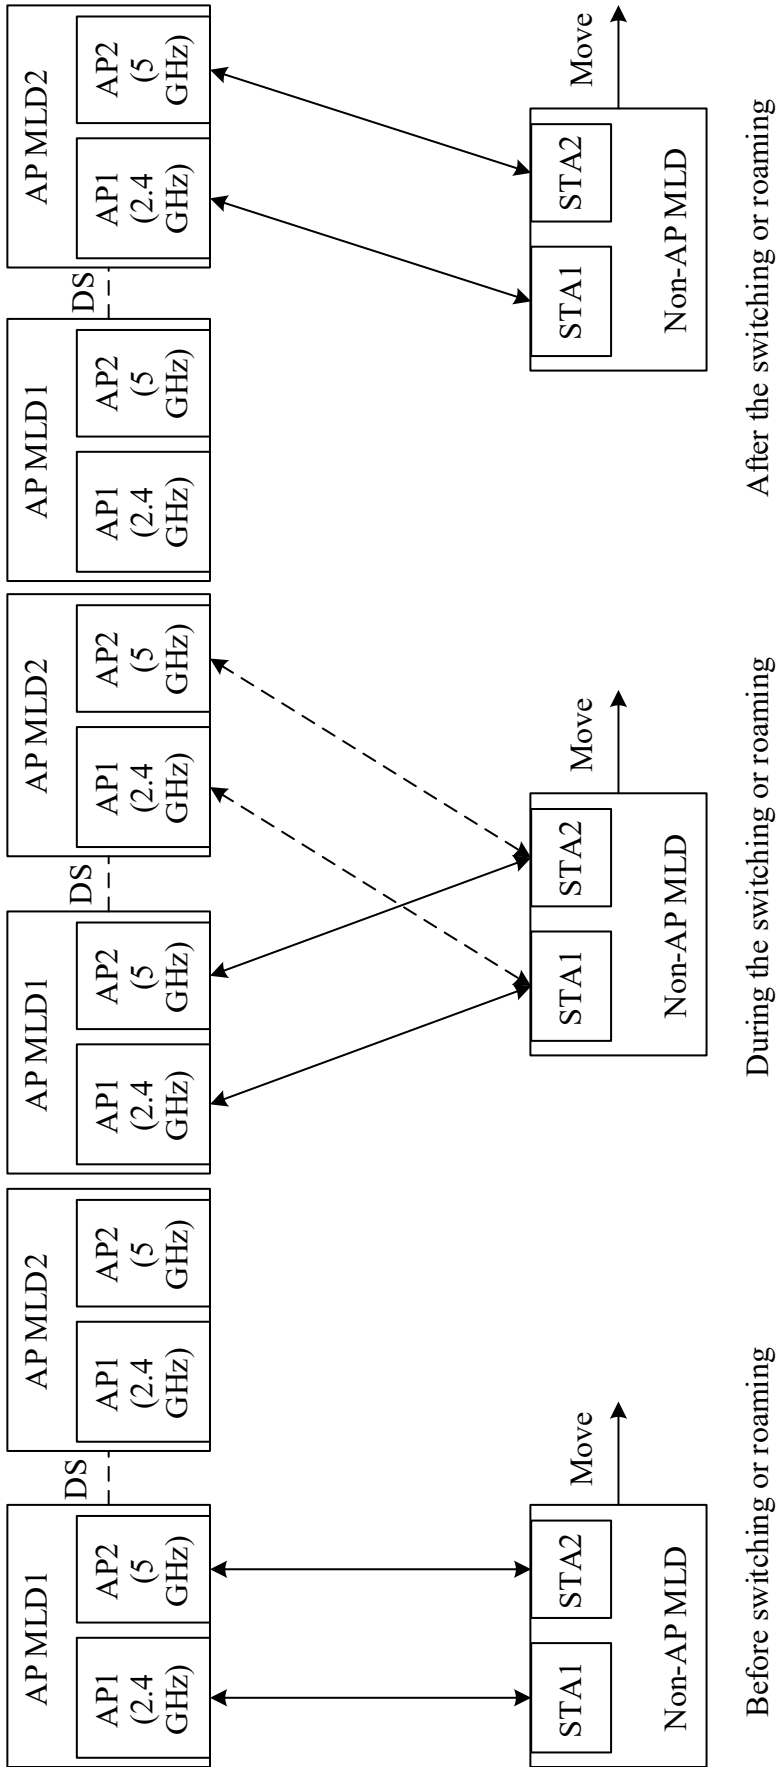


FIG. 3

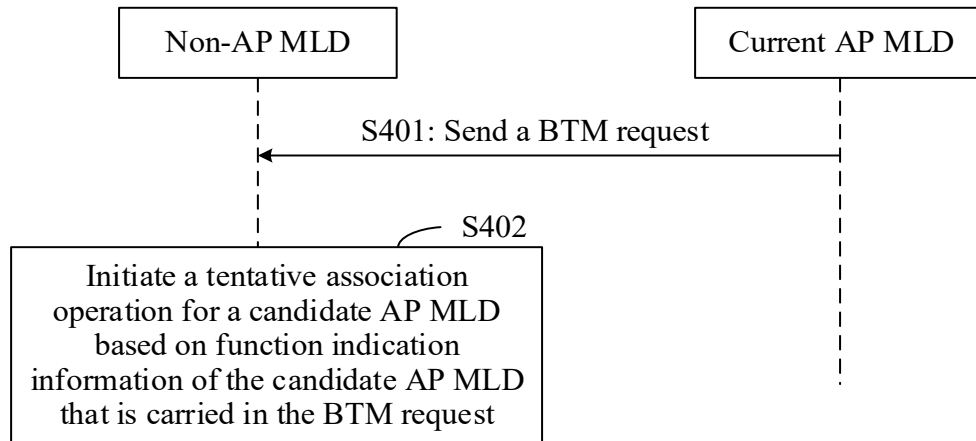


FIG. 4

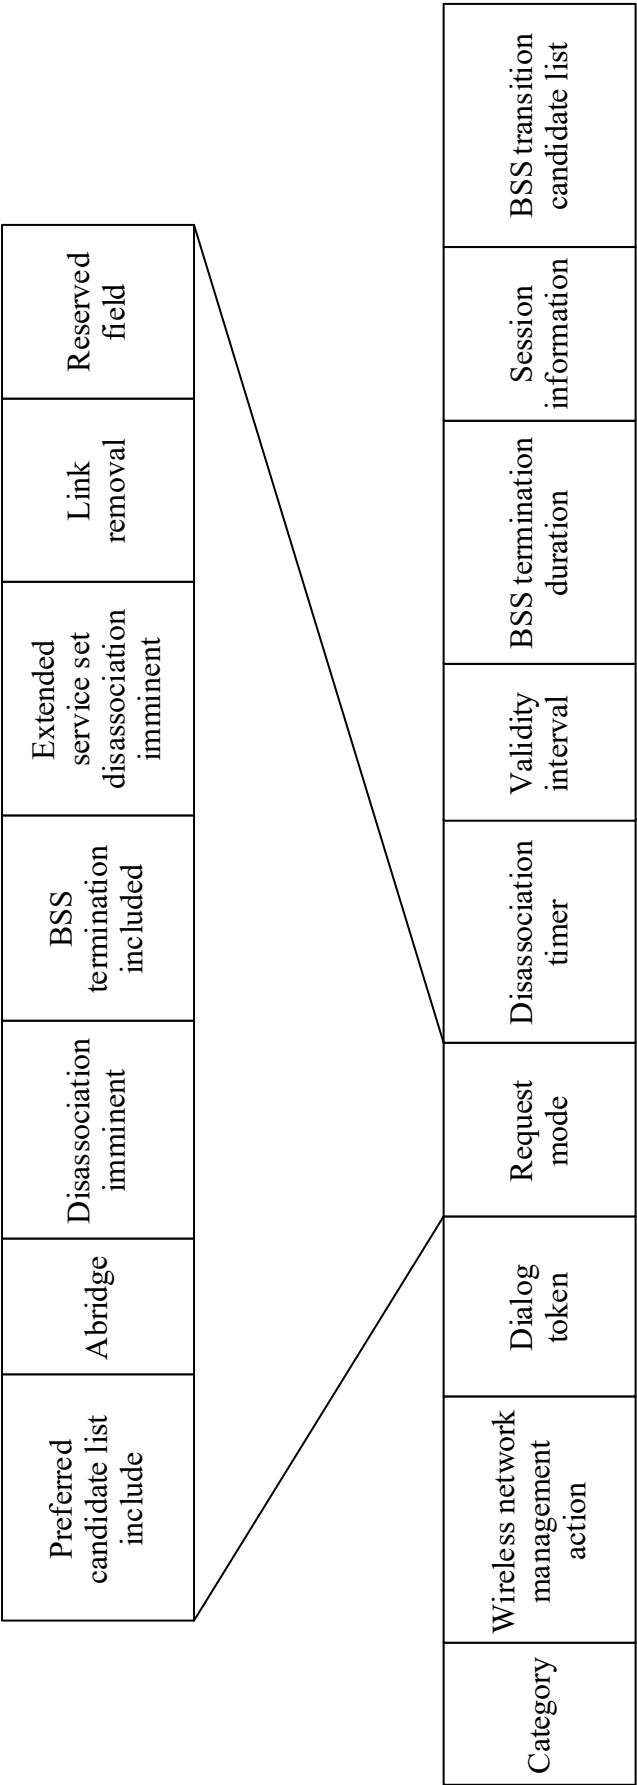


FIG. 5

Subelement identifier	Length	BSS termination timing synchronization function	Duration
-----------------------	--------	---	----------

FIG. 6

Optional subelements	Reserved field
Physical layer type	Co-located with 6 GHz AP
Channel number	On-channel tunneling supported with reporting AP
Operating class	Member of extended service set with 2.4 GHz/5 GHz co-located AP
BSSID information	Unsolicited probe response active
BSS identifier	Co-located AP
Length	Extended range BSS
Element identifier	High efficiency
	Fine timing measurement
	Very high throughput
	High throughput
	Mobility domain
	Capabilities
	Key scope
	Security
	AP reachability

FIG. 7

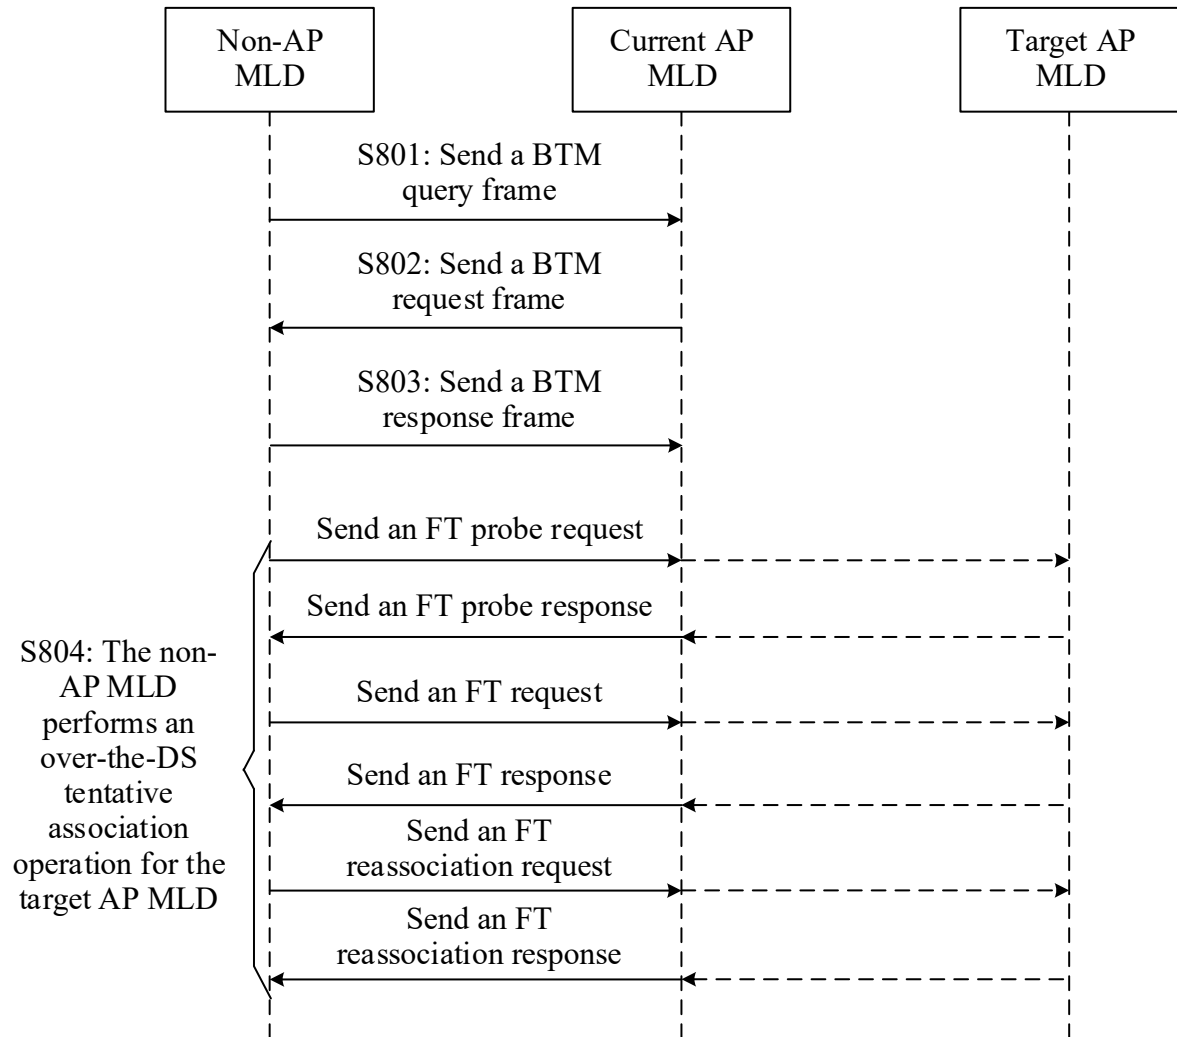


FIG. 8

Category	Wireless network management action	Dialog token	BSS transition query reason	BSS transition candidate list
----------	------------------------------------	--------------	-----------------------------	-------------------------------

FIG. 9

Category	Wireless network management action	Dialog token	BTM status code	BSS termination delay	Target BSSID	BSS transition candidate list
----------	------------------------------------	--------------	-----------------	-----------------------	--------------	-------------------------------

FIG. 10

Category	FT action	MAC address of a non-AP MLD	MAC address of a target AP MLD	Frame body
----------	-----------	-----------------------------	--------------------------------	------------

FIG. 11

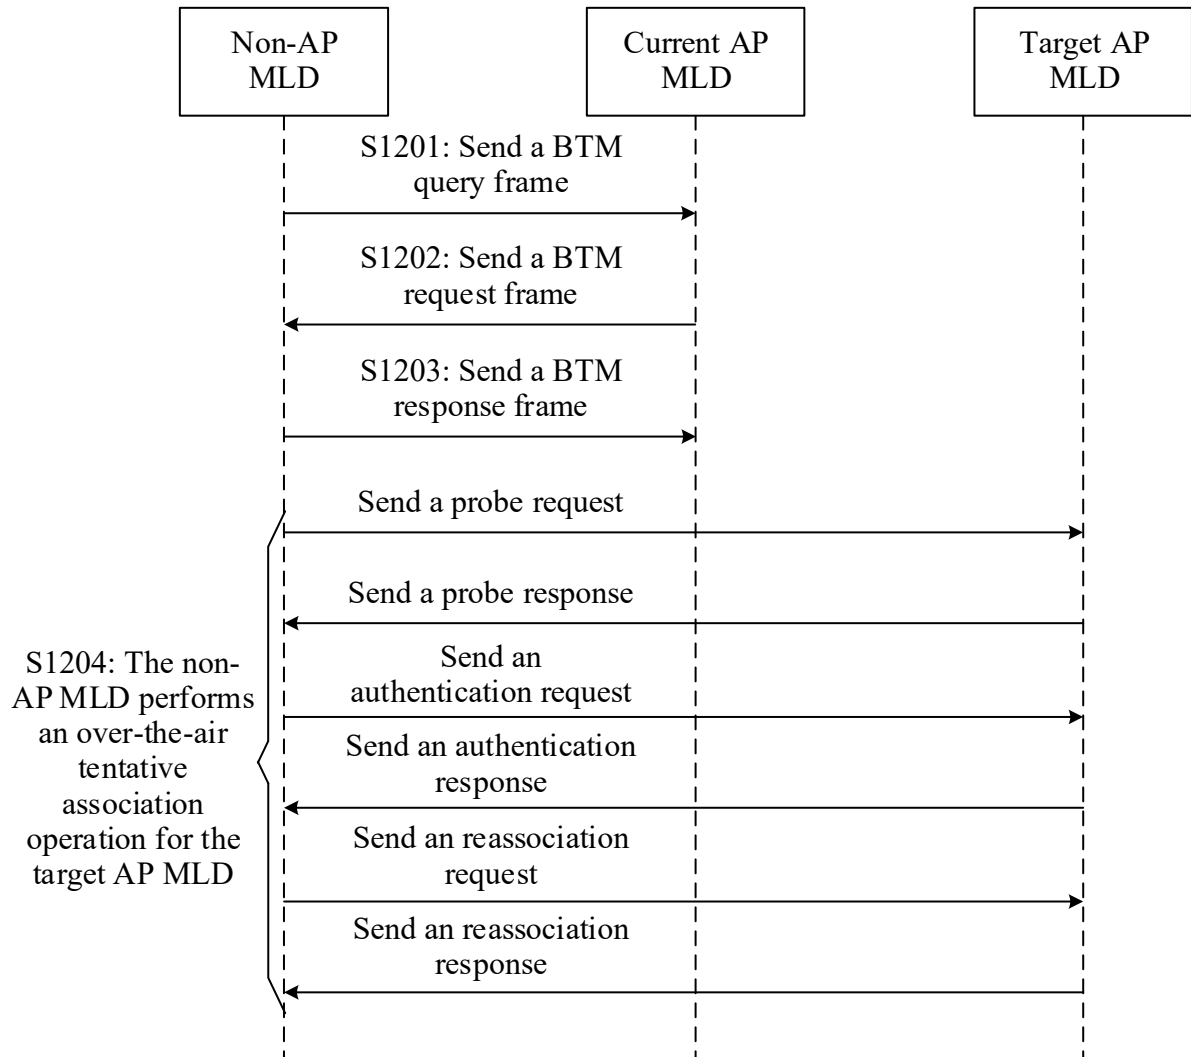


FIG. 12

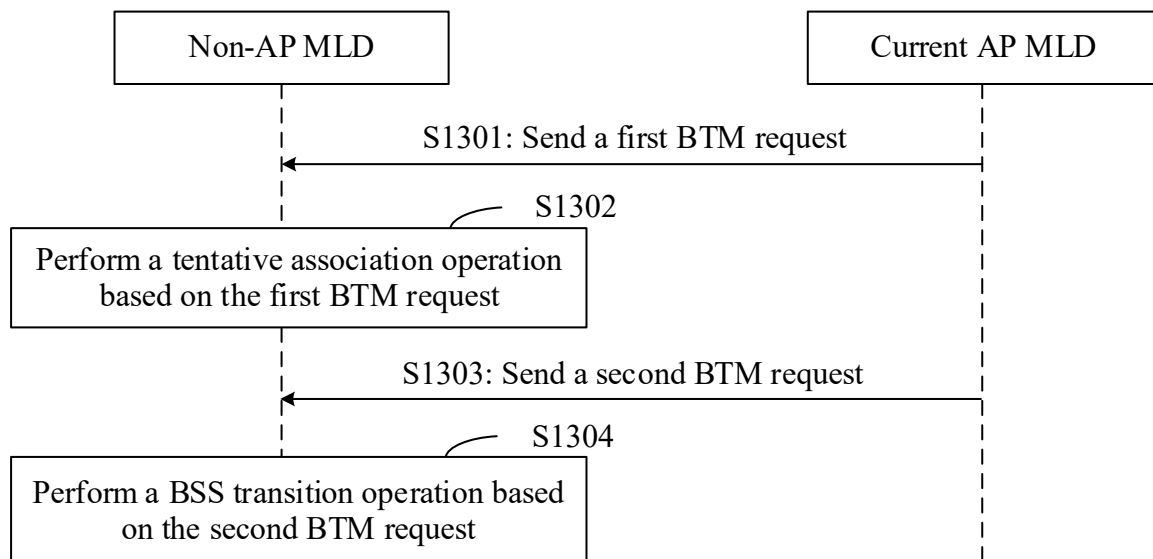


FIG. 13

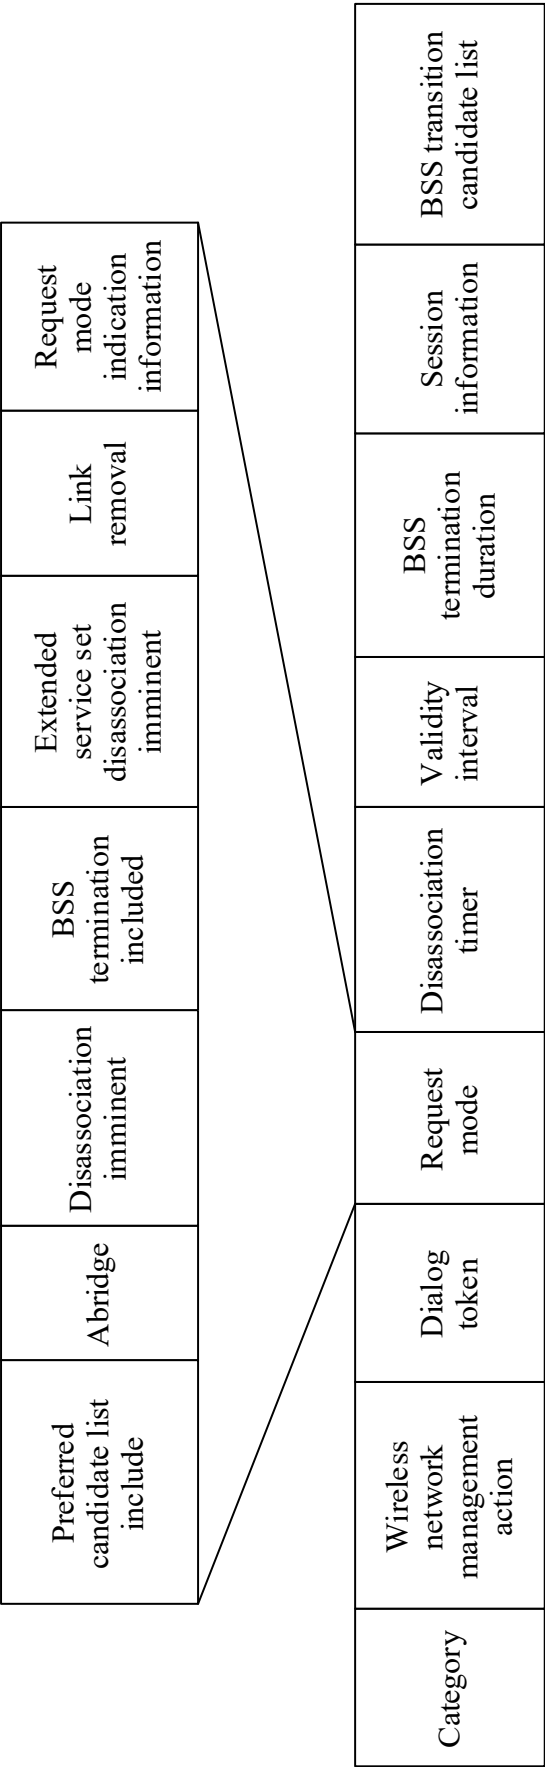


FIG. 14

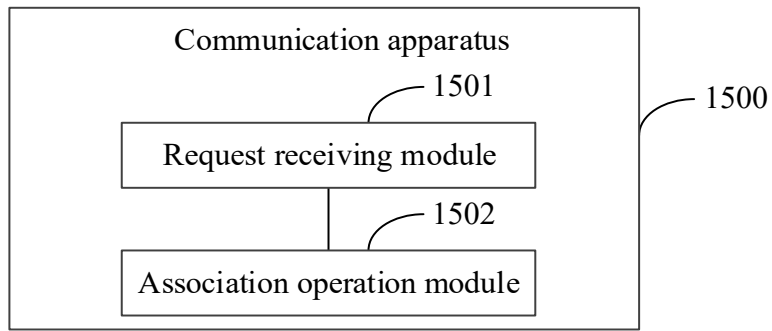


FIG. 15

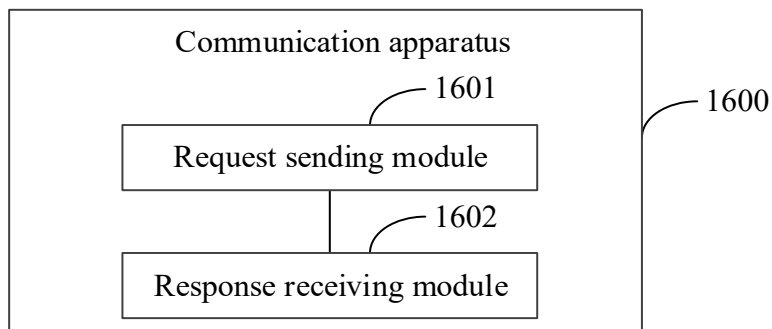


FIG. 16

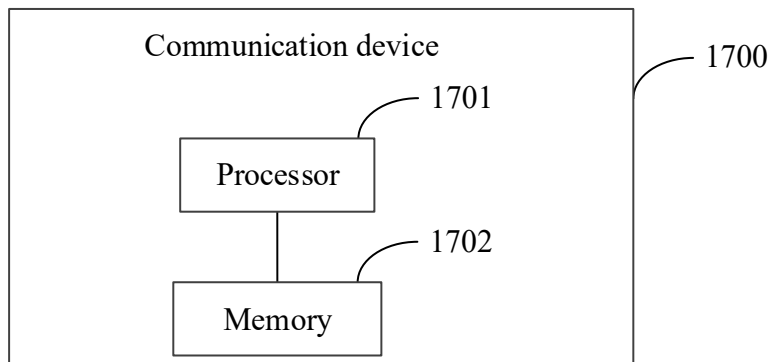


FIG. 17