

RTMP's way

- 1 -

STORING SYSTEM AND METHOD

FIELD OF THE INVENTION

The present invention concerns a system and method for automated storing, retrieval and transporting of goods of every shape and size and configuration in aisleless warehouses, ships, airplanes, trains, trucks or other means for storing and transporting of goods. The system also provides for erecting of aisleless warehouses, aisleless parking buildings, aisleless parking lots and aisleless storage areas for maximum use of available space.

The invention relates particularly, but not exclusively, to automated storage, retrieval and transportation of goods stacked on pallets and to all kinds of containers.

The invention further relates to the automatic storage and retrieval of cars in parking buildings or parking lots.

The invention enables a computerized fully automated handling of stored items, within an aisleless warehouse, from the warehouse to the transporting vehicle, from one transporting vehicle to another and transporting means from the vehicle to a warehouse. It will also enable automated loading and evacuating of containers and automated loading and unloading of the containers to the transporting vehicle or a storage area. The new means can be mounted on a fixed basis or on mobile ones such as ships, airplanes, trains,

trucks and containers. It can be mounted as single level or as multilevel structures in any conceivable arrangement of rectangular units.

SUMMARY OF INVENTION

According to the invention there is provided a system for the storing, retrieving and transporting of goods which are placed on a thin smooth bottomed plate or pallet, the underneath side of which is provided with a plurality of air cushions and a plurality of short leg-like members, a stream of computer controlled compressed air is directed into said air cushions and a supporting floor which is provided with outlets for the compressed air which enables frictionless movement of said pallet, means being provided to, either lateral or longitudinal motion of said pallet, to be placed in a storage area divided to rectangular units each of which contains an air pressure on/off control valve and a lateral and longitudinal motion means, each of said units is individually connected to a main controlling computer, which controls the system as a whole. In practice the motion means could be any mechanical pneumatic, electric or hydraulic means.

EMBODIMENTS OF THE INVENTION

Vehicles, cargo or any other goods would be divided into units and placed on pallets as described above. Each of the above units would be individually connected to an onboard controlling computer.

A standard computer interface will be provided to link the computer and warehouse computer.

All pallets would fit the measurements of said rectangular units enabling free motion from one unit to the other in either the longitudinal or lateral directions. The stored goods will be placed on the carrying plate in a designated area outside the storage area. The loaded pallet will then be lifted on an air cushion and set to motion by the means provided, controlled by the controlling computer. Each of the individual units which the pallet is about to pass will be activated before the pallet enters, to ensure smooth motion of the pallet. Each of the units already passed by the pallet will be immediately de-activated. The controlling computer will place the above pallet at random or according to software defined criteria within the storage area. To enable moves of a pallet in a storage area which contains many other pallets, the computer will dynamically evacuate all necessary plates sideward as to form a dynamic aisle through which the desired pallet will move from one point to the other. For loading to or

unloading from a vehicle or container, it is placed adjacent to the storage area with its floor level at the same level as the storage area's floor level as to form a single surface. The vehicles; onboard computer is connected to the storage area's computer to enable the movement of pallets to and from the vehicle or container.

In order to erect a multilevel storing warehouse an elevator must be added. the elevator will contain one or more such rectangular units, which are identical in size to those of the entire warehouse. Each of the said rectangular units will contain air pressure on/off control valve and lateral and longitudinal motion inducers.

Each of the above units and the elevator's control will be connected to the main controlling computer. The elevator will be mounted adjacent to the warehouse, so at each level it stops, a smooth continuous surface will be formed to allow the pallet's frictionless movement to and from the elevator. The controlling computer with suitable software will handle all movements of the pallets and record at every single moment the whereabouts of each item in the storage area. It will manipulate the pallets to enable storage and retrieval of goods and calculate the path of movement for each pallet simultaneously to ensure smooth movement to and from the storage area exit.

SHORT DESCRIPTION OF THE DRAWINGS

The invention and method will now be described with reference to the drawings in which:

Fig. 1 is a perspective schematic illustration of a multilevel storage facility.

Fig. 2 is a storing pallet and an article placed thereon.

Fig. 3 is an enlarged perspective illustration of a storing unit.

Figs. 4a and 4b are side and top illustrations of an embodiment of a storing unit.

Figs. 5a and 5b are side and top illustrations of a further embodiment of a storing unit.

Figs. 6a and 6b are yet a further embodiment of said unit.

Fig. 7 is an enlarged detail thereof.

Fig. 8a and 8b are further embodiments of said unit.

Fig. 9 is a top view of a carrying pallet.

Fig. 10 is a top view of a flour unit.

Fig. 11 is a side sectional illustration of a Fig. 10 and the propelling means.

Fig. 12 is a sectional illustration of the propelling means.

Figs. 13 and 14 demonstrates two modes of the propelling means.

DETAILED DESCRIPTION OF THE INVENTION

Turning first to Fig. 1 illustrating schematically a storing facility having three storing plans, each of which is divided into a large number of rectangular units 1. The goods to be stored 2 are placed on a carrying plate or pallet 3 (Fig. 2) which in turn is placed, if so required, in an elevator 4 which elevates same to the desired storage plan level.

When elevator 4 stops, it forms a continuous surface with the storage plan, which comprises as stated above, a large number of rectangular units 1.

A pressured air valve 5 (Fig. 3) is turned on to form a thin air cushion between the carrying pallet 3 and the surface thereunder, namely units 1. Simultaneously pressured air is directed underneath the adjacent rectangular unit, to form frictionless movement surface. The pressured air is obtained from pump 6, and delivered by means of conduits 7 and 8 underneath unit 1 and released via a plurality of apertures 9. Pallet 3 is moved by means of different means 10 as will be described. Unit 1 is further provided with sensors 13. Said sensors of both the elevator's rectangular unit and the storage area's rectangular unit 1 sense that the carrying pallet 3 entirely moved to the adjacent storage area's first

rectangular unit, the elevator's air pressure valve is turned off and simultaneously the air pressure valve of the next adjacent rectangular unit in the desired direction of movement is turned on, enabling the continuous movement of the carrying pallet 3. The movement can be induced by lateral motor 10 or by a longitudinal motor to enable movement of the carrying pallet to any of the four possible directions. When the carrying pallet with its load finally reaches its designated storage place the local air pressure valve is turned off to stop the air film effect under the carrying plate so it can rest on the storage plan.

All the above functions are controlled by a computer 12 which is connected to every single item in the system. The computer manipulates the movement of all the carrying pallets in the storage area to clear the path for ingoing or outgoing carrying pallets with the goods placed thereon.

In the same manner any goods could be delivered and transported from the warehouse to another by using trucks equipped with the same facilities. Likewise goods could be transferred to ships, air cargo aircraft and the like.

Figs. 4a, 4b, 5a and 5b illustrate a storing unit 1 provided with two linear motors 15 and 16 to induce lateral and longitudinal movement. Said storing units being provided with holes 9 or being made of porous material 9' through which the air stream passes to create the required

air cushion. Both motors are activated by electric power controlled by means of computer 12.

Figs. 6a, 6b and 7 illustrate a different embodiment of storing unit 1. The present unit is provided with two pairs of omnidirectional wheels 18 and 19. The two pairs being connected to two motors 20 and 21. By activating either motor 20 or motor 21 the required lateral or longitudinal movement of the storing pallet is obtained. Fig. 7 illustrates the manner in which said mechanism is mounted. The wheels 18 or 19 are mounted within a housing 24. Two springs 25 will urge the wheels to establish contact with the pallet travelling thereon even though said pallet is slightly elevated by means of the air stream. Figs. 8a and 8b illustrate a different arrangement of unit 1. In this arrangement 4 pairs of wheels are mounted within unit 1 each opposing pair is interconnected by means of a chain or drive 26 to enable simultaneous function.

Fig. 9 is a top view of carrying pallet 3 which is provided with four air cushions 30 and four short leg-like members 32 which enable pallet 3 to rest thereon when not in motion.

Fig. 10 is a top view of a section of the floor (unit 1) on which pallet 3 travels and which comprises a plurality of apertures or air outlets 34 being precisely in a planned route of air cushions 30 in the lateral or longitudinal

direction. The distance between opening 34 is smaller than the diameter of air cushion 30 such that it will enable that air cushions 30 would cover two apertures 34 simultaneously (thus it will receive pressurized air from one outlet until it meets the adjacent one). There are further being provided propelling means 40 adapted to move pallet 3 to either longitudinal or lateral direction.

Fig. 11 is a sectional side illustration of the floor and the propelling means 40 provided.

Carrying pallet 3 comprises elastic air cushions 30 and short leg members 32. The carrying pallet hovers over floor 1 being part of a warehouse floor. In the floor there are provided air outlets 34 which receive pressurized air from valve 5 (Fig. 3) controlled by computer 12.

There are further provided two propelling means 40, one for the lateral direction and the second for longitudinal direction being rigidly connected to frame 38. The wheels being connected to a source of pressurized air via three way valve 36 via conduit 37.

Fig. 12 is a top sectional illustration of propelling means 40. Said means comprises a tyre 41 placed over wheel 42 which is connected to axle 44. Air passage 43 connects tyre 41 and bore 46 provided in axle 44. To said bore 46

there is connected a pivoting air connector 45 through which pressurized air is being supplied to inflate tyre 41 at will. The axle is supported by bearings 47 which are connected to swinging arms 48. As can be seen in Figs. 13 and 14 these arms 48 fulcrumed over pin 50 which enables them to swing up and down. Pin 50 is supported by the base structure 51 being rigidly connected to the base of the floor frame 38. A spring 52 is mounted intermediate swinging arm 48 and support 51. When tyre 41 is inflated via conduit 37 contact will be established between the tyre 41 and pallet 3 (Fig. 14). When air valve 36 is open air from tyre 41 will escape thus the tyre will be pulled downwardly by spring 52 and disconnected from pallet 3. The said spring would also resist the force created by motor 54 and belt 55 on axle 44.

As seen in Fig. 14 the propelling system is in contact with pallet 3 when tyre 41 is inflated. When motor 54 is activated its revolving is transferred by belt 55 to wheel 42, and by tyre 41 to pallet 3.

The engagement of tyre 41 and pallet 3 is being disconnected when the air is released through valve 37 and the spring pulls the wheel downwardly against the supporting arm 48.

Manner of Operation

Pressurized air being supplied via conduit 37 and released via aperture 34 in floor part 1 into the air cushions 30 which causes the air cushion to be inflated. The blown up air cushions would elevate carrying pallet 3 and cause that legs 32 will not engage the floor. Pressurized air is fed to tyre 41 of propelling means 4, the tyre will be inflated and establish connection with the carrying pallet 3. The motor is being turned on which would rotate the wheel and the pallet will move in the required direction. At the end of the motion the motor being switched off the air is released from the tyre which will enable the spring to pull the tyre downwardly the air supply is cut off and the plate would rest on its legs at that point.

THIS SHEET HAS BEEN
REPLACED

CLAIMS:



1. A system for storing, retrieving and transporting of goods which, according to the invention, are placed on a thin, smooth bottomed plate or pallet, means being provided to induce lateral or longitudinal motion of said plate or pallet within or to a storing location which is divided to rectangular units each of which provided with said motion inducting means, each of said units is individually connected to a main controlling computer which is adapted to control the whole system.
2. A system as claimed in Claim 1 where a stream of compressed air is directed in between said plates or pallet and said rectangular units which comprise the storing area to create an air cushion which enables frictionless movement of said pallet.
3. A system as claimed in claims 1 and 2 where said rectangular units are provided with an air pressure on/off control valve which is connected to an air pump both in turn being controlled by said computer.
4. A system as claimed in Claim 1, where said rectangular unit is provided with two linear motors

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

- 13 -

which induce lateral or longitudinal movement of said plate placed thereon.

5. A system as claimed in Claim 1, where said rectangular unit is provided with at least two pairs of omni-directional wheels which are keyed to two motors which in turn are controlled by said computer.


6. A system as claimed in Claim 5 where said wheels are mounted "floatingly" by means of a spring mechanism.

7. A system as claimed in Claim 1 where said unit is provided with propelling means adapted to be inflated to establish contact with said pallet.

8. A system as claimed in Claim 1, where said unit is provided with inflatable air cushion.



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

STORING SYSTEM AND METHOD

ABSTRACT

An automated system and method for storing, retrieval and transporting of goods of every shape and size in aisleless warehouses, ships, airplanes, trains and the like. The system also provides for erecting of aisleless warehouses, parking lots and the like. The invention enables a computerized fully automated handling of stored items such as loading and evacuating of containers. The system provides the moving of the goods by placing same on a pallet (1) which travels on a flat and smooth floor.

The pallet (1) is provided with apertures (9) which release pressurized air to form an elastic air cushion which enables the pallet (1) to hover over the flat surface and linear motors to enable movement in any required direction.

Figs 1 and 2 to accompany abstract.

This Sheet Has Been Replaced



Fig.-1

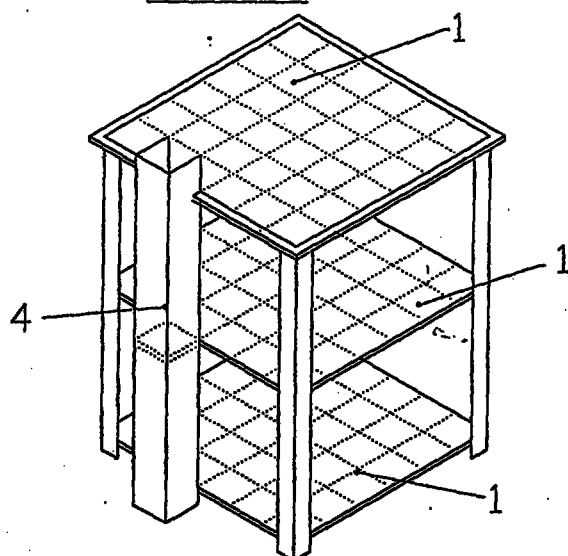


Fig.-2




Fig.-3

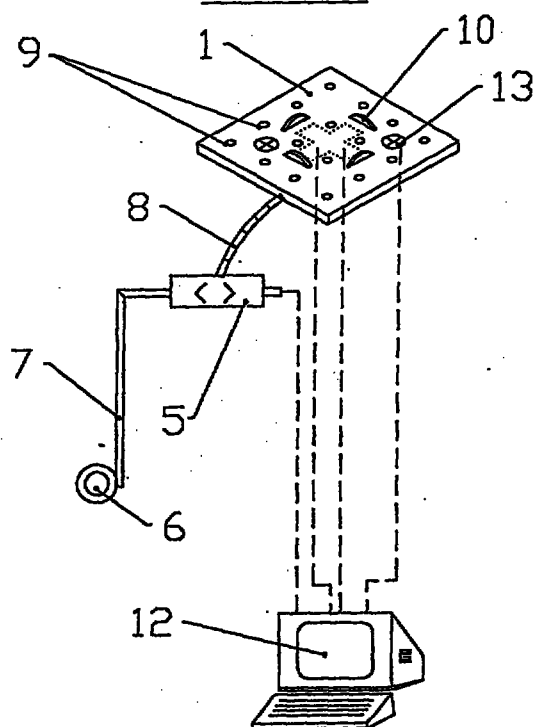


Fig.-4a

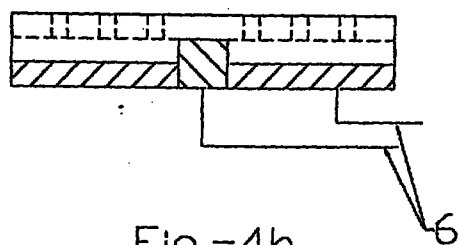


Fig.-4b

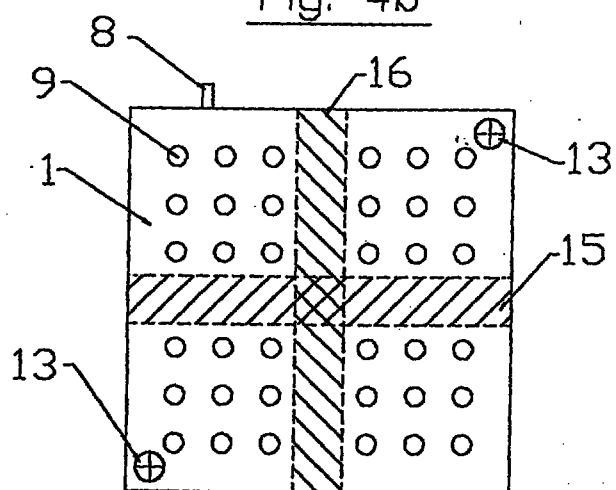


Fig.-5a

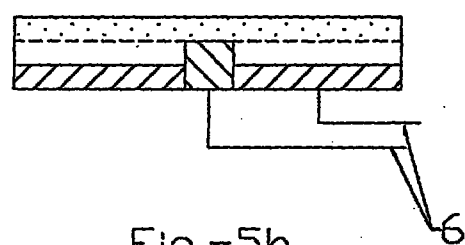


Fig.-5b

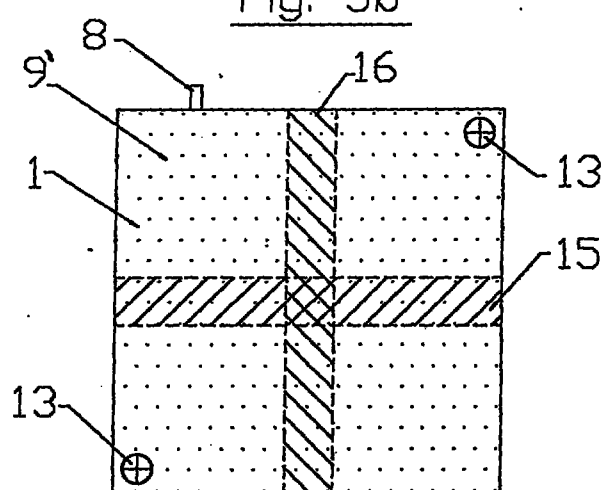


Fig.-6a

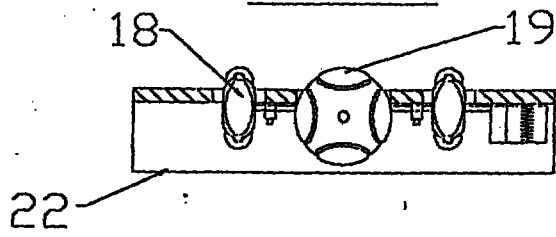


Fig.-6b

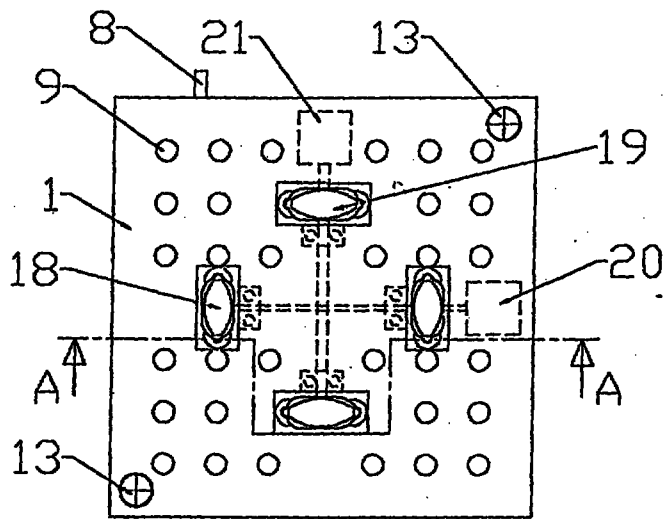


Fig.-7

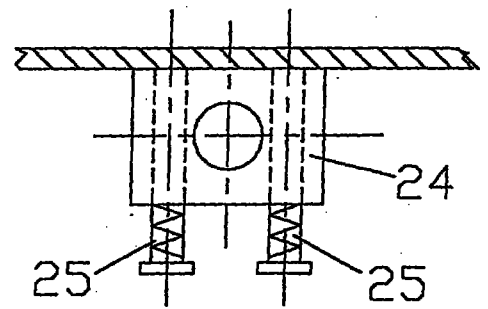


Fig.-8a

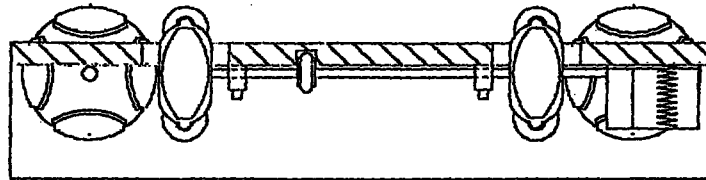


Fig.-8b

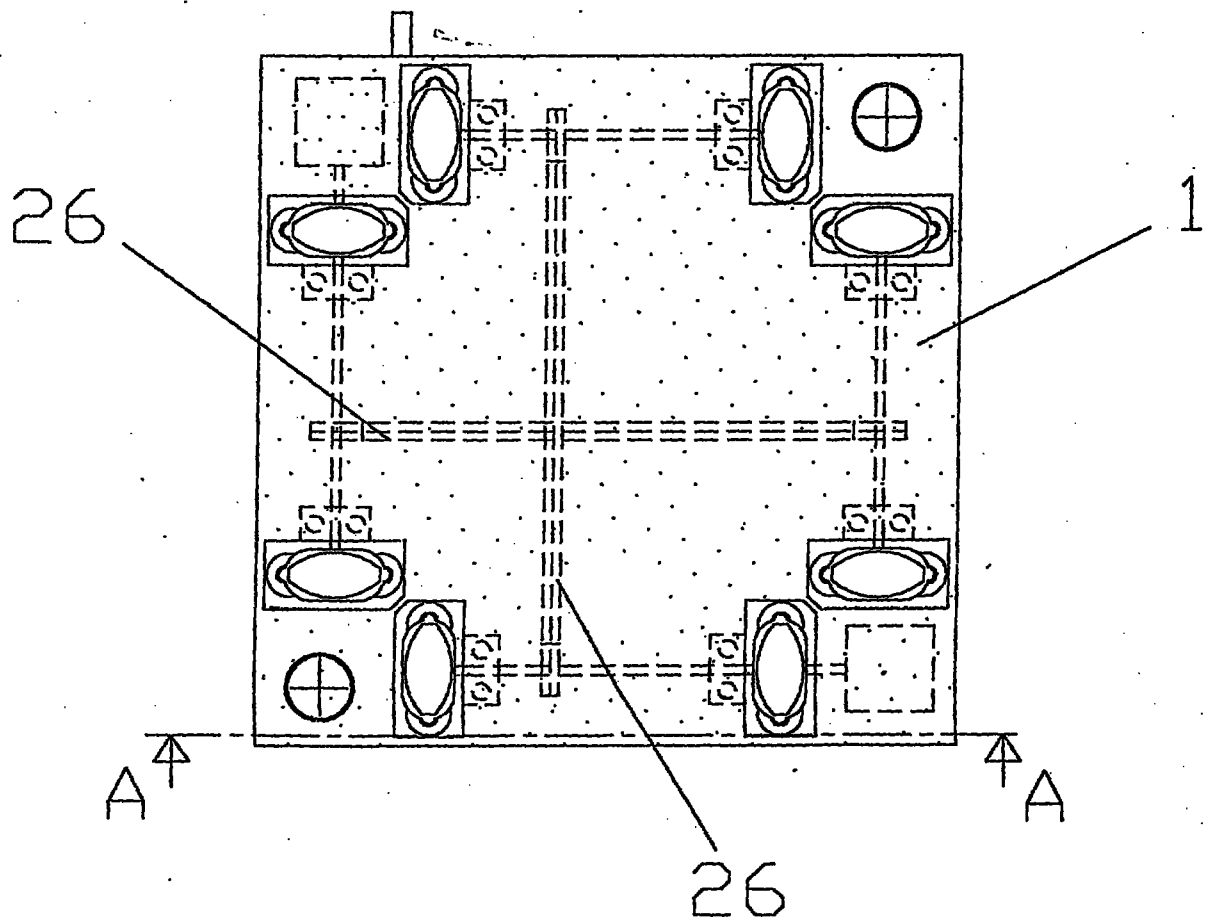


Fig.9

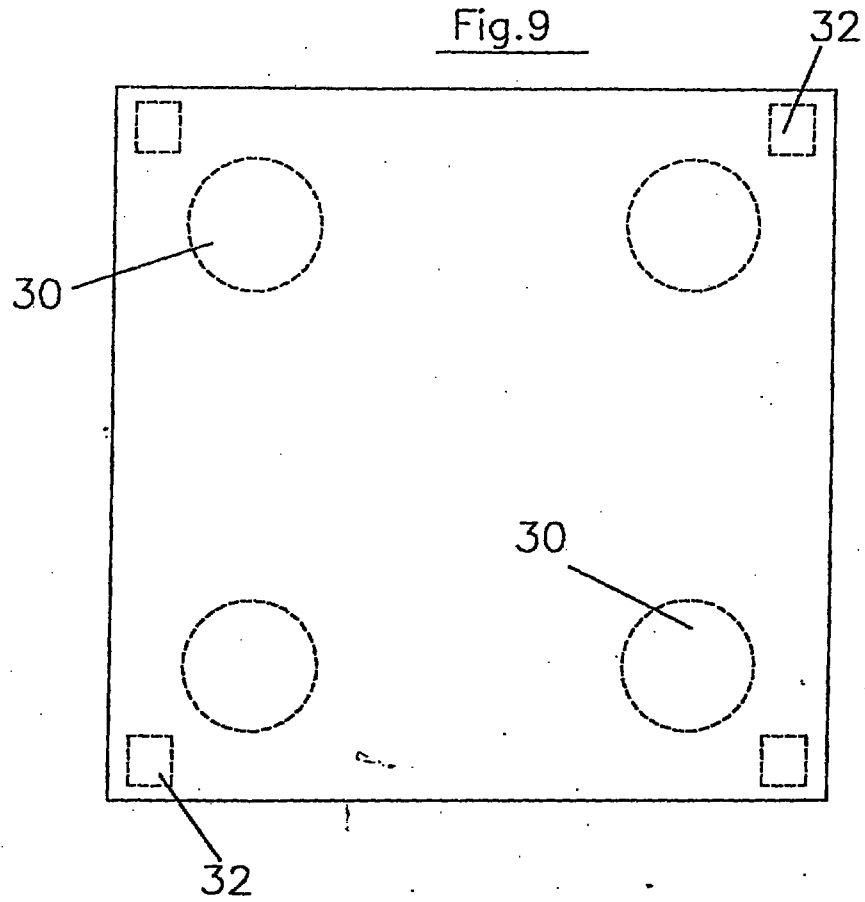


Fig.10

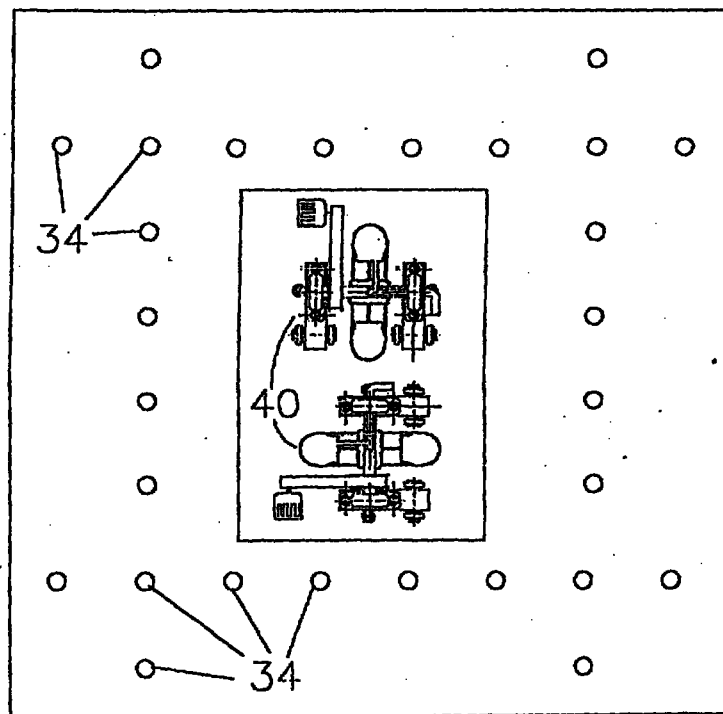


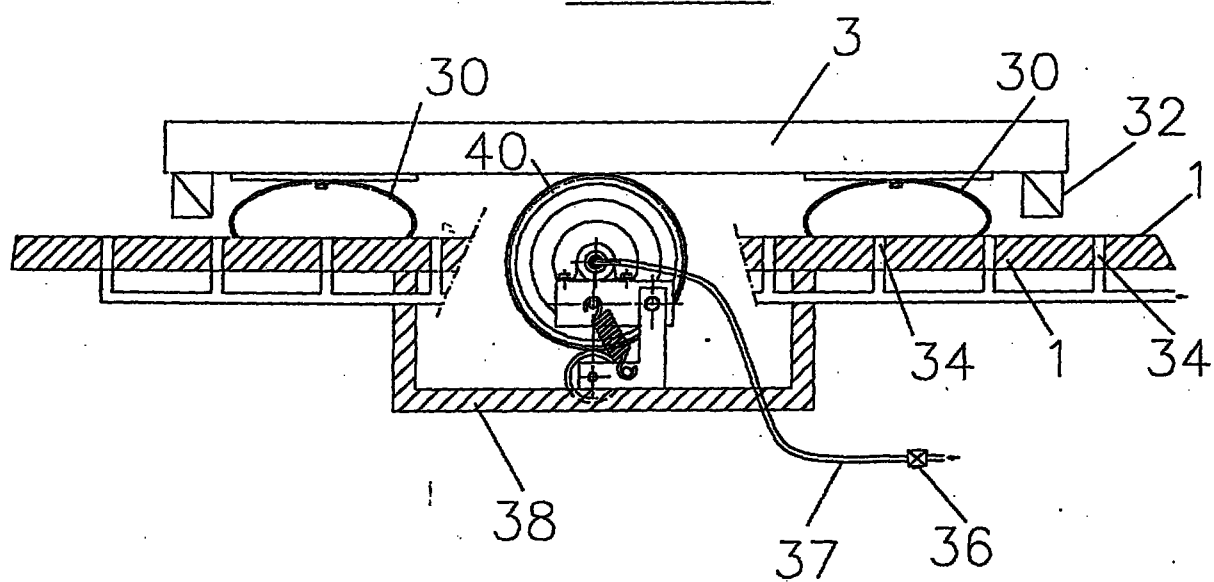
Fig.11


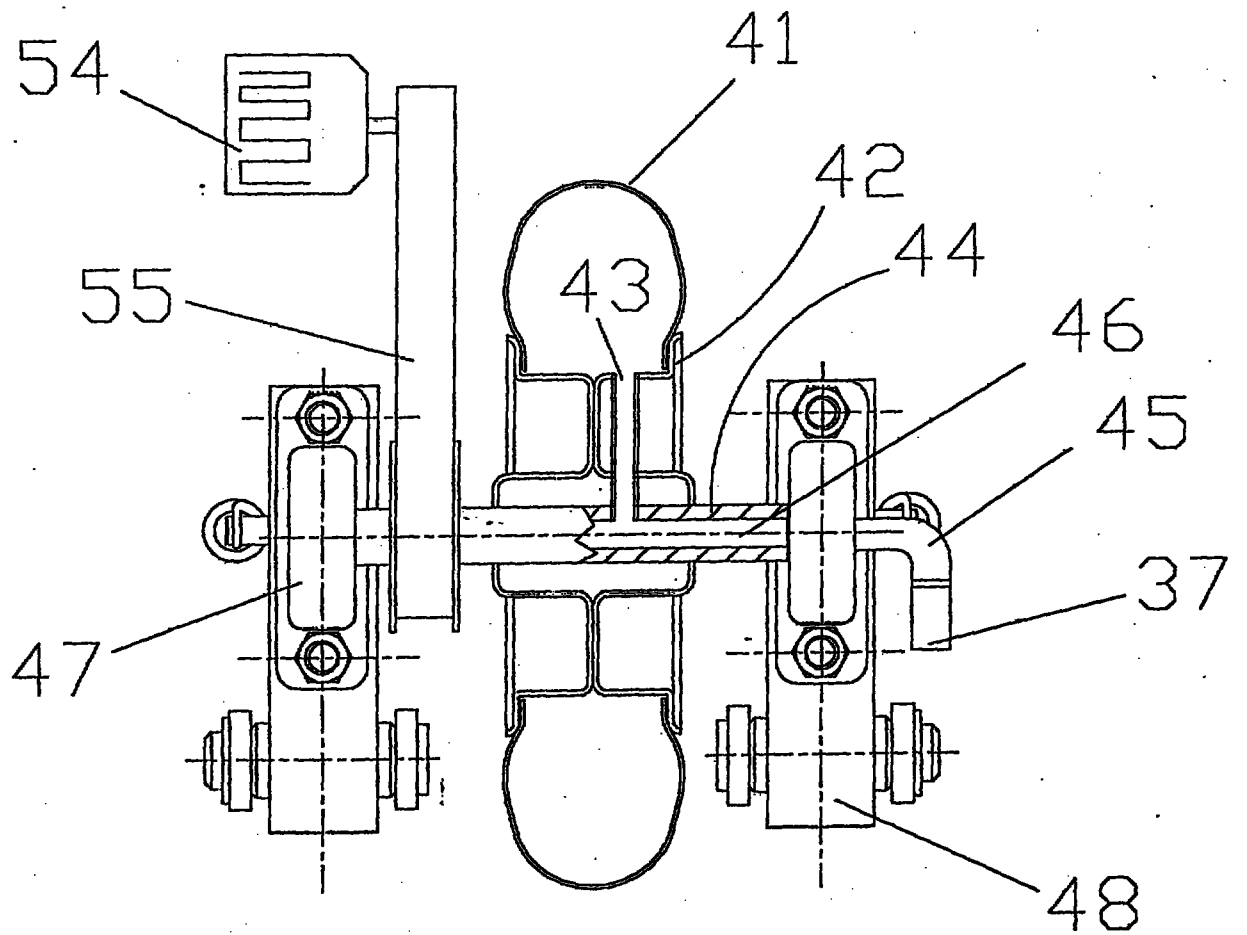
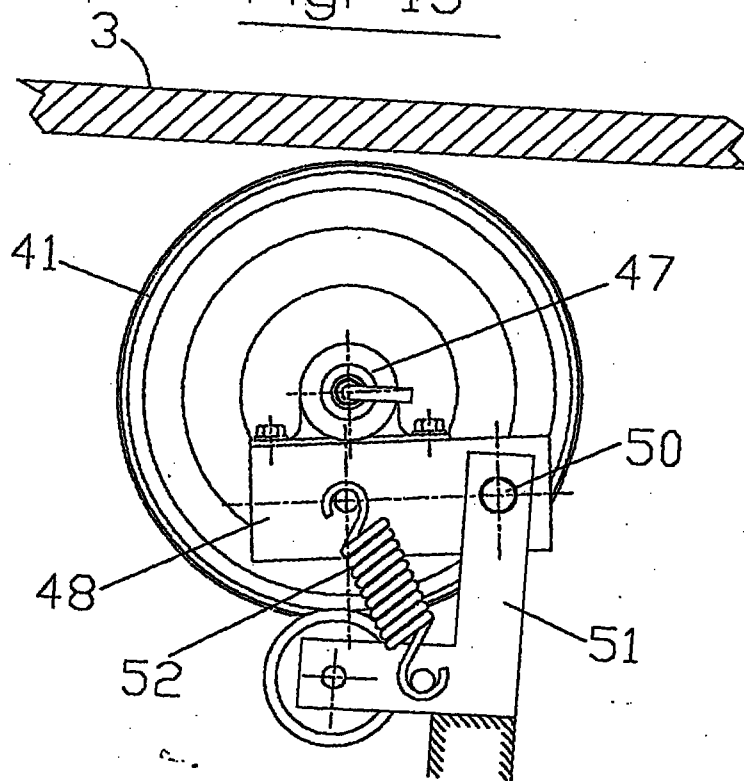
Fig.-12

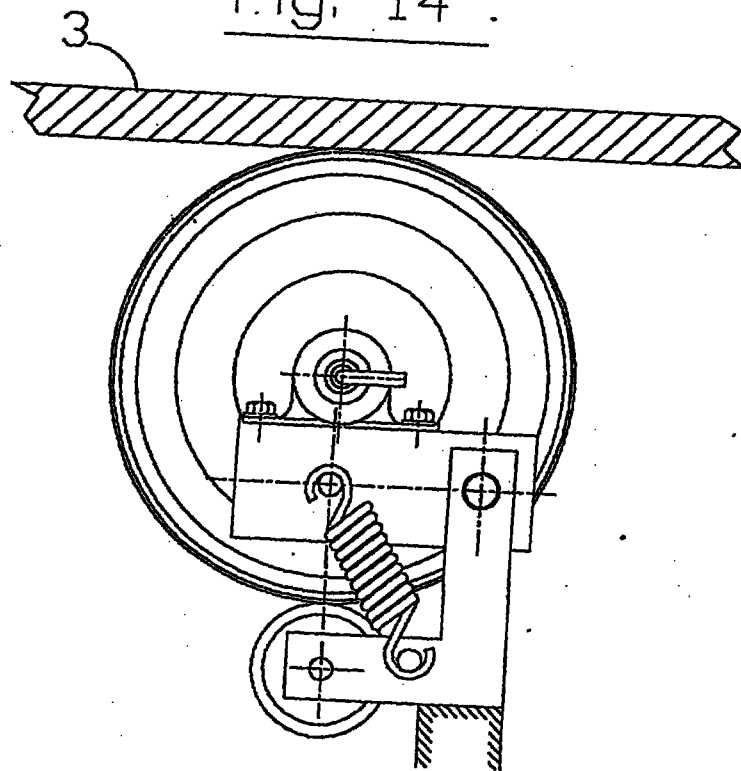Fig.-13Fig.-14



TEXT OF THE ABSTRACT

STORING SYSTEM AND METHOD

An automated system and method for storing, retrieval and transporting of goods of every shape and size in aisleless warehouses, ships, airplanes, trains and the like. The system also provides for erecting of aisleless warehouses, parking lots and the like. The invention enables a computerized fully automated handling of stored items such as loading and evacuating of containers. The system provides the moving of the goods by placing same on a pallet (3) which travels on a flat and smooth floor.

Rectangular units (1) are provided with apertures (9) which release pressurized air to form an elastic air cushion which enables the pallet (3) to hover over the flat surface and linear motors to enable movement in any required direction.

Fig. 1,2

REPLACEMENT SHEET

25 SEP 1997

27 JAN 1998


CLAIMS:



1. A system for storing, retrieving and transporting of goods which, according to the invention, are placed on a thin, smooth bottomed plate or pallet, the plate or pallet being provided with an inflatable air cushion, means being provided to induce lateral or longitudinal motion of said plate or pallet within or to a storing location which is divided to rectangular units each of which provided with said motion inducting means, each of said units is individually connected to a main controlling computer which is adapted to control the whole system.
2. A system as claimed in Claim 1 where a stream of compressed air is directed in between said plates or pallet and said rectangular units which comprise the storing area to create an air cushion which enables frictionless movement of said pallet.
3. A system as claimed in claims 1 and 2 where said rectangular units are provided with an air pressure on/off control valve which is connected to an air pump both in turn being controlled by said computer.
4. A system as claimed in Claim 1, where said rectangular unit is provided with two linear motors



- 13 -



which induce lateral or longitudinal movement of said plate placed thereon.

5. A system as claimed in Claim 1, where said rectangular unit is provided with at least two pairs of omni-directional wheels which are keyed to two motors which in turn are controlled by said computer.

6. A system as claimed in Claim 5 where said wheels are mounted "floatingly" by means of a spring mechanism.

7. A system as claimed in Claim 1 where said unit is provided with propelling means adapted to be inflated to establish contact with said pallet.