

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 February 2006 (02.02.2006)

PCT

(10) International Publication Number
WO 2006/011145 A3

(51) International Patent Classification⁷: **G01N 29/00**

(21) International Application Number:
PCT/IL2005/000797

(22) International Filing Date: 26 July 2005 (26.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/590,896 26 July 2004 (26.07.2004) US

(71) Applicant (for all designated States except US): **SPI-
DER TECHNOLOGIES SECURITY LTD** [IL/IL]; 7A
Hashalom Rd., 67892 Tel Aviv (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GAN, Livne** [IL/IL];
50 Neve Zin St., 84990 Midreshet Ben Gurion (IL). **MI-
CAN, Sever-Yoan** [IL/IL]; 17 Emek Haela St., 52620 Tel
- Hashomer (IL). **NACHOM, Lior** [IL/IL]; 58 Hasharon
St., 81514 Yavne (IL).

(74) Agent: **APPELFELD ZER LAW OFFICE**; 29 Lilin-
blum, 65133 Tel-aviv (IL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

[Continued on next page]

(54) Title: VIBRATION SENSOR

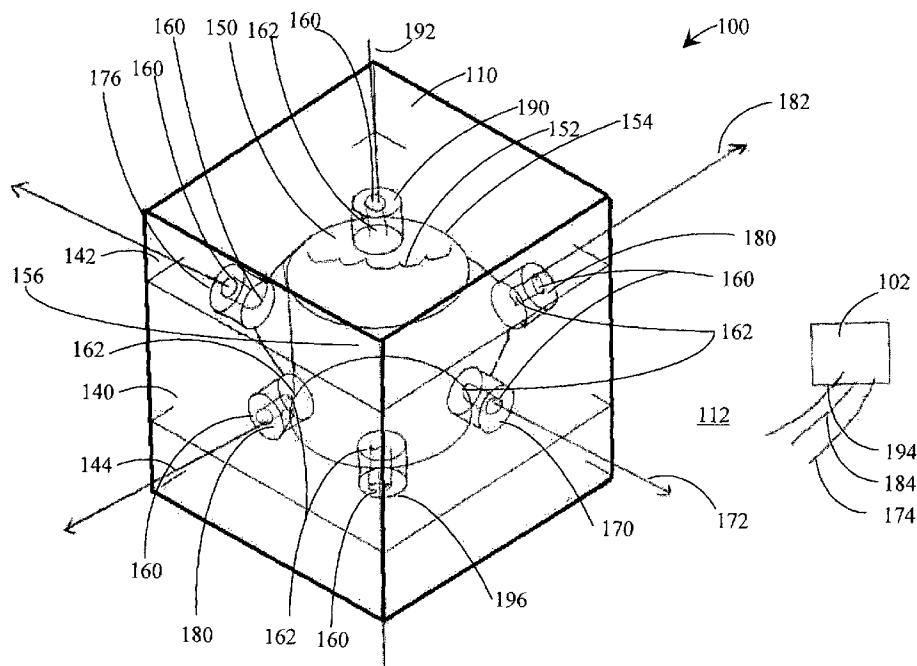

(57) Abstract: A method for measuring a vibration from four or more equidistant points in a chamber (150), comprising centering a chamber surface (154) around a center point (156), containing a fluid (152) within the chamber surface (154), measuring a fluid vibration from at least four measuring points in juxtaposition with the chamber surface, wherein at least two measuring points are located along a first axis passing through the center point and at least two measuring points are located along a second axis passing through the center point (156).



(88) Date of publication of the international search report:

27 April 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.