

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 March 2003 (13.03.2003)


PCT

(10) International Publication Number
WO 03/021059 A1

- (51) International Patent Classification⁷: **E04G 21/16**, 21/14, B66C 1/00, B66F 19/02
- (72) Inventor; and
(75) Inventor/Applicant (*for US only*): **LAWLEY, Derek, Trent** [NZ/NZ]; Unit 17 The Concourse, 18 Croftfield Lane, Glenfield, Auckland (NZ).
- (21) International Application Number: PCT/NZ02/00171
- (22) International Filing Date:
5 September 2002 (05.09.2002)
- (74) Agents: **PIPER, James, William** et al.; Pipers, Level 1, 29 Waterloo Road, PO Box 30-495, Lower Hutt (NZ).
- (25) Filing Language: English
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (26) Publication Language: English
- (30) Priority Data:
514030 5 September 2001 (05.09.2001) NZ
515071 29 October 2001 (29.10.2001) NZ
- (71) Applicant (*for all designated States except US*):
AUSTRIM NATIONAL RADIATORS LIMITED
T/A REID ENGINEERING SYSTEMS [AU/NZ]; Unit 1, Croftfield Lane, Glenfield, Auckland (NZ).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: ORIENTATION APPARATUS

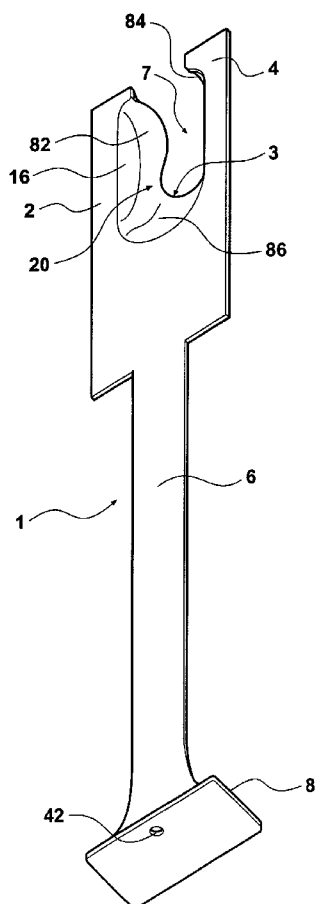

(57) Abstract: An orientation apparatus (1) which includes at least one locating means (2,4), a guiding means (42), and a control means (38) guided by the guiding means. The orientation apparatus is connectable in use to a separate rotatable means (24) and the locating means is adapted to restrict the rotational movement of the rotatable means to rotational movement in use about a selected axis of rotation. The orientation apparatus also includes a remotely operable control means which is adapted to allow or effect disengagement of a rotatable means engageable in use with an anchoring means (14).

WO 03/021059 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.