

BEST SERVER SELECTION IN LAYERED
CELLULAR RADIO SYSTEMBACKGROUND OF THE INVENTION5 Field of the Invention

The invention relates to handoff of mobile stations within cellular radio systems and, more particularly, to handoff within layered cell structures of such systems.

10 History of the Related Art

In cellular radio communication systems a geographic area is divided into a plurality of individual regions referred to as cells, each of which is provided with radio service on a plurality of
15 separate RF channels the frequencies of which are reused among different cells sufficiently separated from one another that there is a sufficiently low level of interference between them. When a mobile station receiving radio service from a particular base station
20 serving a particular cell moves from that cell into another adjacent cell, communication with the mobile station is "handed off" from the first base station to the second base station serving the adjacent cell. Such handoff is accomplished by a mobile switching
25 center (MSC) to which all of the base stations are connected and which controls the allocation of communication channels to the individual mobiles moving throughout the region served by the cells.

As the demand for cellular radio service increases
30 over time, the capacity of existing systems has been severely stressed to serve all the subscribers who would like to have access to the system, particularly in major metropolitan areas. To address this demand, cellular radio technology is currently moving from
35 analog based systems, in which each subscriber communication channel is allocated to a single radio channel, to digital based systems in which a plurality

This Sheet Has Been Replaced



REPLACED SHEETS SG

☒ Description : paged ...1... to paged 31...
☒ Claim(s) : paged 32... to paged 43...
☐ Drawing(s) : paged to paged
☒ Abstract : paged 44... to paged 52

of subscriber channels can be assigned to each radio channel through time division multiple access (TDMA) radio technology. In TDMA radio, each radio channel is divided into a plurality of time slots and a digitized portion of each subscriber's conversation is broadcast in a different time slot. However, even with such improvements in channel capacity, there exist certain areas within major metropolitan areas in which the demands on the system are so great that it cannot be successfully satisfied by existing cellular radio architectures. For example, in the area in and around a convention center located in a major metropolitan area, the channel usage by portable cellular radio transceivers may be so great that the demands for service cannot be satisfied by the entire channel capacity of the base station serving the cell within which the convention center is located. In such situations, it has been proposed to provide additional "layers" of cellular radio coverage provided by additional lower powered base stations located within an existing, so-called, "umbrella" cell and referred to as "microcells". Such microcells may have a coverage or service area on the order of a few hundred yards in contrast to a few kilometers of coverage by the base station of the overlying umbrella cell. A plurality of such microcells may be located adjacent to one another and form a contiguous coverage area of substantial width all of which is within the overall coverage area of the umbrella cell.

When a layered cell structure, as described above in conjunction with umbrella cells and microcells, is used there is provided an enhanced level of radio capacity which can be configured for individual circumstances and which provides an assurance that users can receive service despite an extremely high

This Sheet Has Been Replaced



demand within a very small geographic area. Moreover, additional layers of radio coverage may be added, for example, by a plurality of either contiguous or separated "pico cells" positioned within the coverage or service area of the individual microcells, each of which are in turn within the overall umbrella cell. The base stations providing the radio coverage within the pico cells would be of even still lower power than the base stations serving the microcells and have a coverage or service area of, for example, a few hundred feet to provide coverage within a single building or a single floor within a large convention center.

Thus, in layered cell architectures, the issue of server selection and handoff of each mobile radio transceiver moving within a geographic area involves many more options. That is, it is possible for the mobile station to receive radio service at any given moment from either a pico cell base station, a microcell base station, or an umbrella cell base station. When conventional handoff criteria used in single layered cellular architectures are applied to this situation, problems arise and the solution is less than ideal. The ability to configure the handoff arrangement for maximum efficiency with respect to the utilization of channel availability and consistent with high quality radio service to each mobile subscriber is highly desirable.

When handoff is effected between adjacent cells in a single layer cellular radio architecture, the principle criterion used is that the quality of the signal received from the mobile station by the respective base stations capable of providing radio service. That is, the quality of the signal received from the mobile station by the base station currently serving the mobile is compared with the quality of



signal received by a base station serving an adjacent cell and when the quality of signal in the latter exceeds the former, the mobile is handed off to the base station serving the adjacent cell. In addition, 5 a signal quality increment, known as an offset or hysteresis, is also applied to the signal quality difference value so that unless the signal quality in the adjacent base station is at least "x" amount greater than the presently serving base station, 10 handoff does not occur. This prevents oscillating handoffs due to signal quality perturbations in which the mobile is repeatedly handed back and forth between two adjacent base stations.

When conventional handoff techniques, based purely upon signal quality, are applied to the multiple layer cellular architecture, the resulting service quality is often not optimal and in many cases totally inappropriate. This is because it is generally preferable to serve a mobile station with the lowest possible level of base station as a preferred service 20 provider primarily because of capacity reasons. That is, if sufficient signal quality exists from the microcell, it is preferred to serve the mobile from that cell rather than handing the mobile off to the umbrella cell which has fewer total channels available for service than a plurality of adjacent microcells 25 would have.

Because of the foregoing problems associated with the use of existing handoff algorithms within layered cellular architectures, it is desirable to introduce a 30 system of handoff algorithms which maximize the efficient utilization of channel availability within a multi-level cellular radio architecture. The system of the present invention provides such a technique.

35

This Sheet Has Been Replaced



SUMMARY OF THE INVENTION

5 In one aspect of the invention, mobile subscribers are served by the base station of the cell level which is the preferred service provider for that mobile as long as the signal quality is above a selected minimum value. Should the signal quality deteriorate below that selected minimum value, best server selection possibilities are evaluated on the same level and such possibilities are first exhausted before handoff is made to a cell on a lower preference level.

10 In another aspect of the present invention, handoff is performed of a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas. Categories of preference are assigned within each cell with respect to each other associated cell within the system as to which said cell's service area is either adjacent, contiguous, or overlapping. The signal strength of the radio signals providing communication between the mobile station and the base station serving each of the associated cells within the system is measured and compared to a preselected threshold value. Whether or not to handoff the mobile to a base station serving an associated cell is determined based upon whether the signal strength of the radio signal therefrom is greater than the threshold value and the preference assigned to the associated cell.

20 In a still further aspect of the invention, best server selection is performed for a mobile station served on a first radio channel by a first base station serving a first cell and operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas. Categories of preference are assigned

This Sheet Has Been Replaced



within each cell with respect to each other associated cell within the system as to which said cell's service area is either coextensive adjacent, contiguous, or overlapping. Each associated cell is assigned a category of preferred, equal preference or non-preferred based upon the size of its service area relative to that of the cell within which the assignment is made. Information on a second radio channel broadcast by a second base station serving a second associated cell is received and stored. The signal strength of the radio signals broadcast on the first and second radio channels, respectively, are measured. The preference category of the cell from which said second radio channel signal is received is determined. The second base station broadcasting the second radio channel is selected as the best server in response to any one of the following conditions, (a) the second cell having a preference category of preferred and the signal strength of the radio signal of said second radio channel being greater than a preselected value, (b) the second cell having a preference category of equal preference and the signal strength of the radio signal of the second radio channel being greater than the signal strength of the radio signal of the first radio channel, or (c) the second cell having a preference category of non-preferred and the signal strength of the first radio channel being less than a preselected value and the signal strength of the radio signal of the second radio channel being greater than that of the first radio channel.

In yet another aspect of the invention, server selection is performed for a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of



cells. Each of the cells is provided with radio service by a base station the broadcast power of which and the resultant service area of which varies from larger to smaller. Each cell is provided with a list
5 of neighboring cells the service areas of which are proximately associated with the service area of the cell. A minimum acceptable radio channel signal strength value is assigned for each cell. The strength of the radio signals providing communication between
10 the mobile station and the base station is measured for the cell currently serving the mobile station as well for each of the neighboring cells thereof. A server is selected for the mobile station from among the currently serving cell and its neighboring cells by
15 choosing the cell having both the smallest service area and a radio signal strength which is at least equal to the minimum acceptable value.

BRIEF DESCRIPTION OF THE DRAWINGS

20 For a more complete understanding of the present invention and for further objects and advantages thereof, reference may now be had to the following description taken in conjunction with the accompanying drawings, in which:

25 FIG. 1 is a pictorial representation of a single level cellular radio communication system including a mobile switching center, a plurality of base stations and a plurality of mobile stations;

30 FIG. 2 is a pictorial representation of a multi-level cellular radio communication system illustrating a plurality of microcells and a plurality of overlying umbrella cells;

FIG. 3 is a graph illustrating received signal strength from a mobile station moving within a

This Sheet Has Been Replaced



microcell and an overlying umbrella cell within which it is included;

FIG. 4 is a diagram of nominal minimum and maximum microcell sizes;

5 FIG. 5 is a graph of receive signal strength from a microcell and an overlying umbrella cell reflecting different signal criteria;

10 FIG. 6 is a diagram illustrating handoff border signal strengths for a microcell and an overlying umbrella cell;

FIG. 7 is a block diagram illustrating a plurality of base stations located respectively within adjacent cells of a cellular radio system;

15 FIG. 8 is a block diagram of the infrastructure equipment within a cellular radio system;

FIG. 9 is a block diagram of a mobile radio transceiver for use within a cellular radio system; and

FIGS. 10-12b are flow charts illustrating procedures used in the present invention.

20

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring first to FIG. 1, there is illustrated a conventional single layer cellular radio communication system of the type to which the present invention has a relationship. In FIG. 1, an arbitrary geographic area may be divided into a plurality of contiguous radio coverage areas, or cells C1-C10. While the system of FIG. 1 is illustratively shown to include only 10 cells, it should be clearly understood that in practice, the number of cells will be much larger.

30

Associated with and located within each of the cells C1-C10 is a base station designated as a corresponding one of a plurality of base stations B1-B10. Each of the base stations B1-B10 includes a transmitter, receiver, and base station controller as

35



is well known in the art. In FIG. 1, the base stations B1-B10 are illustratively located at the center of each of the cells C1-C10, respectively, and are equipped with omni-directional antennas. However, in other configurations of a cellular radio system, the base stations B1-B10 may be located near the periphery, or otherwise away from the centers of the cells C1-C10 and may illuminate the cells C1-C10 with radio signals either omni-directionally or directionally. Therefore, the representation of the cellular radio system of FIG. 1 is for purposes of illustration of a single level cellular radio system only and is not intended as a limitation on the possible implementations of the cellular radio system within which the system of the present invention may find utility.

With continuing reference to FIG. 1, a plurality of mobile stations M1-M10 may be found within the cells C1-C10. Again, only 10 mobile stations are shown in FIG. 1 but it should be understood that the actual number of mobile stations will be much larger in practice and will invariably greatly exceed the number of base stations. Moreover, while none of the mobile stations M1-M10 will be found in some the cells C1-C10, the presence or absence of the mobile stations M1-M10 in any particular one of the cells C1-C10 should be understood to depend, in practice on the individual desires of the mobile stations M1-M10 who may roam from one location in the cell to another or from one cell to an adjacent cell or neighboring cell, and even from one cellular radio system served by an MSC to another system.

Each of the mobile stations M1-M10 is capable of initiating or receiving a telephone call to one or more of the base stations B1-B10 and a mobile switching center (MSC). A mobile switching center (MSC) is



connected by communication links, e.g., cables, to each of the illustrative base stations B1-B10 and to the fixed public switch telephone network (PSTN), not shown, or a similar fixed network which may include an integrated system digital network (ISDN) facility. The relevant connections between the mobile switching center (MSC) and the base stations B1-B10, or between the mobile switching center (MSC) and the PSTN or ISDN, are not completely shown in FIG. 1 but are well known to those of ordinary skill in the art. Similarly, it is also known to include more than one mobile switching center (MSC) in the cellular radio system and to connect each additional mobile switching center (MSC) to a different group of base stations and to other mobile switching centers (MSCs) via cable or radio links.

Each of the cells C1-C10 is allocated a plurality of voice or speech channels and at least one access or control channel, such as a forward control channel (FOCC). The control channel is used to control or supervise the operation of mobile stations by means of information transmitted to and received from those units. Such information may include incoming call signals, outgoing call signals, page signals, page response signals, location registration signals, voice channel assignments, and maintenance instructions as the mobile station travels out of the radio coverage of one cell and into the radio coverage of another cell. The control or voice channels may operate either in an analog or digital mode or a combination thereof.

FIG. 1 illustrates a relatively conventional single level cellular structure in which mobile stations are handed off from one cell to another by it being served with radio channels in communication with first one base station and then an adjacent base

This Sheet Has Been Replaced



station based upon the signal level of the mobile station received from each of the respective base stations.

Referring next to FIG. 2, there is shown an illustrative multi-level layered cellular architecture in which a plurality of umbrella macrocells A-G, analogous to the cells C1-C10 of FIG. 1, overlies and include a plurality of microcells a-e located within the same service area of one or more of the umbrella cells. In FIG. 2, each of the umbrella cells A-G would be served respectively by a base station, similar to the base stations B1-B10 of FIG. 1, and it would include a service area within a cell on the order of, for example, several kilometers in diameter. Similarly, each of the microcells a-e would also be served by a base station (not shown) located within the cell and providing a respective service area on the order of a few hundred meters for each. Just as the service areas of the umbrella cells A-G are adjacent, contiguous or overlapping to one another, so also are the service areas of the respective microcells a-d contiguous to one another, with the service area of microcell e being isolated from the other microcells but coextensive within the service area of the umbrella cell A. Each of the base stations providing radio coverage for both the umbrella cells A-G and the microcells a-e could be operated under the control of a single MSC (not shown).

As shown in FIG. 2, a mobile station 21 moving along the path identified by arrow 22 would move from the region served by umbrella cell A through the regions served by microcell d and microcell c and into the coverage area of umbrella cell B. Providing radio service to the mobile station 21 as it moves along the path 22 could involve a number of different handoffs

This Sheet Has Been Replaced



from different serving base stations at different points along the way depending upon the handoff criteria or handoff algorithm used to implement such handoffs. For example, at the beginning of its path, the mobile station 21 could only be provided with service by the base station serving the umbrella cell A, while at point 23 along the path 22 it could be served either by the base station of umbrella cell A or the base station of microcell d. In addition, when it reached point 24 on the path 22, it could be served either by the base station of umbrella cell A or the base station of microcell c. Further, at point 25, service could be provided by the base station of microcell c or the base station of umbrella cell B. Finally, at point 26 on path 22, the mobile station 21 could only be provided with service by the base station serving umbrella cell B. Thus, the decision criteria with respect to which cell the mobile station 21 should be handed off to and the criteria which should be used to determine both the timing and the result of that handoff are important considerations in configuring the efficiency and capacity of radio service to be provided to the mobile stations within the multi-layered cellular structure of FIG. 2.

As discussed above, in implementing the handoff process within a single layer cellular structure, a mobile station is only located in one cell at a time and leaves the old cell behind when it enters and begins receiving service by virtue of handoff to the new cell. In such case, the signal strength received from the mobile station decreases for the old cell and increases for the new cell when the handoff border is crossed by the mobile station. However, when a microcell is placed within an umbrella cell and is totally surrounded by the umbrella cell, there is an

This Sheet Has Been Replaced



entirely different situation with respect to the variation in signal strength as the mobile moves through the microcell located within the umbrella cell. For example, if the handoff border for a microcell on the reverse side from the umbrella cell is crossed, both the serving cell signal strength and the candidate cell signal strength are increasing or decreasing, depending upon the direction of movement of the mobile station. This variation in signal strength becomes more and more of a problem the closer to the antenna site serving the umbrella cell site the microcell is located. These problems may be illustrated by two examples set forth below, both for digital radio channels.

In the first example, assume that an umbrella cell has 50 watts erp (47dbm) and an enclosed microcell 0.1 watt erp (20dbm). The microcell is placed 200 meters from the base station site of the umbrella cell. 0.1 watts is an appropriate power level for a 200 meter diameter microcell. As shown in FIG. 3, there is illustrated the calculated signal strength received by a mobile station using the formula $L=30+35\log d$ as the path loss formula, with d being given in meters. In addition, in an attempt to have an appropriate cell size, and signal offset value is set to 10db, i.e., 10db is subtracted from the measured umbrella cell signal strength before comparison to two cells in accordance with standard single level cell architecture handoff algorithms. As illustrated, the signal strength of the signal received by a mobile station from the umbrella cell moving from the base station location of the umbrella cell toward and through the base station site of the microcell, begins quite high and decreases exponentially as a function of the distance between the mobile station and the umbrella



cell base station. The signal strength received by the mobile station from the microcell increases exponentially until it passes through the base station serving the microcell at 200 meters distance from the base station of the umbrella cell and then decreases exponentially thereafter as a similar function of the distance from the microcell base station.

Referring next to FIG. 4, there is shown the nominal handoff border offset value of 10db being applied when the signals are compared, meaning that the nominal handoff border is the line where the umbrella cell is 10db stronger than the microcell. Adding a plus or minus 5db inaccuracy in the mobile assisted handoff (MAHO) measurement by the mobile station and a ± 3 db hysteresis, the maximum and minimum cell size is found where the umbrella cell is 18db and 2db stronger, which are shown by the inner and outer line of FIG. 4, respectively. The lowest signal strength in the microcell is found to be around -97dbm. Such a case may work and might be acceptable in some cases, however, the uncertainty of the handoff borders is relatively high. Moreover, if some fading is introduced into the consideration of signal level, such a technique is likely to become unacceptable from a practical standpoint. These uncertainties in handoff borders will be even worse if fading is added to the signal strengths. Without any offset at all, the cell is much too small considering the ability to provide coverage with 20dbm output power.

A second example of the problems associated with using the conventional single layer handoff algorithm for a multi-layer cellular structure, may be illustrated with the case of 200 meters between two separate cell sites but with 30dbm for the micro cell. In this case, the difference was that the microcell had



30dbm output power. FIG. 5 is a graph showing the signal strength from the two cells at the different distances from the respective base station of the umbrella cell and the microcell as the mobile travels from the base station of the umbrella cell through the base station of the microcell and then away from both. While the overall structure of the respective signal level curves is similar to that shown in FIG. 3, the overlapping relationship is somewhat different. Moreover, if a nominal offset value is selected to be 17db, the nominal handoff border, i.e, the line where the umbrella signal strength is 17db higher than that of the microcell signal strength, is represented by the straight line in FIG. 6. As discussed above, inaccuracies in the mobile and hysteresis values are added giving borders at 9db and 25db offsets, respectively. In this case, the umbrella cell and the microcell are equivalent. In the worse case, the umbrella cell is the small one and the best case the microcell is the small one. This example illustrates what can easily happen if the offset is set too high in an attempt to get a reasonable coverage.

The above two examples illustrate that there are cases where the existing locating function and handoff algorithm gives highly inappropriate results in the case of multi-level cellular structures. Attempts to address these inadequacies may include: (1) providing design rules to be followed by cellular system operators to avoid dangerous situations; and (2) modification of the locating algorithms to better handle the umbrella/microcell situation. The use of design rules is not an acceptable approach since rules must define restrictions on microcell power levels and distances from the umbrella cell site. Such rules have to include a considerable margin of error in order to



cover nominal situations and will be perceived as a limitation on the operation of the system. In addition, if the rules are not followed, either deliberately or accidentally, the system will be perceived to have a lower quality with degraded voice quality and more dropped calls leading to system complaints.

As pointed out above, the present algorithm used in the case of single level cellular structures functions adequately to use relative signal strength between current cells and neighboring cells in order to locate handoff borders when the cells are of equal preference and located side by side. Another criterion is needed for handoff between umbrella cells and microcells.

The system of the present invention provides handoff criterions based on absolute signal strength. That is, when the serving cell is the umbrella cell and the signal strength for a microcell neighbor, measured by the mobile station in digital cellular systems and by the signal strength receiver in analog cellular systems, is above a "sufficient" signal level, so as to ensure a good speech quality in the microcell, a handoff can be made to the microcell. This criterion ensures that a handoff to the microcell is performed whenever it can give service of sufficient quality.

A general approach inherent in the system of the present invention is to handle each of the cells as belonging to distinctly different layers, i.e., macrocells, microcells, pico cells, etc., without defining different layer types. In order to achieve, for example, three categories of neighboring cells: (1) neighbors beside, (2) neighbors above, and (3) neighbors below, such a classification is useful. In such a definition, a "neighbor beside" will be an



existing neighbor on the same level as the currently serving cell. Neighbors above for a microcell would be an umbrella cell and neighbors below for an umbrella cell would be microcells.

5 Under the present system, handoff should be accomplished to a neighbor below whenever the signal strength in that neighbor is above a new "sufficient" threshold value to be defined as a cell parameter. On the other hand, handoff to a neighbor above, for
10 example, the umbrella cell, should only be done when the signal strength is below the same threshold provided that it is a better candidate. A hysteresis value will be applied to the threshold in order to avoid oscillating handoffs.

15 The modification of the handoff criteria employed in the application of the present invention to one exemplary implementation of a cellular radio system, the CMS 88 system of Ericsson Radio System, has an impact on both the exchange and the base station
20 software in that in the exchange software handling of new cell parameters and neighbor type information must be added. Such new cell parameters and neighbor type information are sent by the exchange to the base station and, in the base station, these parameters must
25 be added to the digital channel software as new criteria for sending handoff requests. In the case of analog channels, such corresponding software criteria must be located in the exchange itself.

To be more general, there are two different
30 methods implied in best server selection in accordance with the present invention: (a) Analog, in which the signal strengths for each call are measured in the neighbor cells, and these together with the signal strength for uplink in the serving channel are
35 evaluated; and (b) Digital in which mobile assisted



handoff (MAHO) is employed and similar measurements are made by the mobile and reported to the base station and evaluated.

5 A basic concept inherent in the present invention is that it is desirable to serve a mobile station by means of a cell level within a multi-cell structure which is at the lowest possible level provided the signal quality is sufficient to provide good service. In the situation shown in FIG. 2, including an array of
10 umbrella cells and microcells positioned therein, and in which it possible to provide coverage from either the umbrella cell or the microcell, it is normally optimal to allow the microcell to handle the subscriber traffic whenever it is appropriate from the standpoint
15 of quality transmission. In other words, in such situations the microcell, i.e., the lowest level of cells in the multi-cell array, is preferred. In the case where multi-cell levels are implemented, one layer is generally preferred over the other primarily for
20 capacity reasons.

The system and method of the present invention is implemented based upon the processing of a list of neighbor cells and upon the differentiation between preferred cells, non-preferred cells and cells with
25 equal preference in order to ascertain the most appropriate serving cell both at time of call setup as well as during the call itself. For example, as shown in FIG. 2, the microcells a, c, d, e are preferred to the umbrella cell A, microcells a, b, c are preferred
30 to the umbrella cell B, while umbrella cells A-G have equal preference to each other and microcells a-e have equal preference to each other.

Within the present system, one goal is to ensure that the mobile subscriber radio transceiver is tuned
35 to the most appropriate cell both during the idle mode



as well as during the call process. Preferably, the algorithm used in the present invention is employed to select a cell which is the same in both idle and during the process of a call in order to make sure that the cell as selected at call setup is also accepted immediately after the call setup.

In the present invention, data are assigned to each cell as set forth below in the chart.

	<u>Parameter</u>	<u>Description</u>
10	1	A selected signal strength threshold which defines a sufficiently "acceptable" signal strength for the cell
15	2	A hysteresis value to be used together with the assigned threshold
20	3	A list of neighboring cells
	4	For each neighbor, an assigned type, i.e., preferred, non-preferred, equal preference
25	5	For each neighbor, an assigned hysteresis value

30 In case there is no qualified preferred neighbor and the signal strengths in the currently serving cell is below the threshold, then the "best" cell should be selected and handed off to. The hysteresis value of parameter 5 is used in this particular situation.

35 Referring briefly to FIG. 7, there is shown a plurality of neighboring cells 41-43 which may be at any level within a multi-level cellular structure. Within each cell is a base station 44-46 each of which comprises a control channel transceiver 44a-46a as well as a plurality of voice channel transceivers 44b-46b. 40 The control channel of the base station is used for communication with mobile stations during idle period



when no call has been established. The signalling placed on the control channel includes the information to be broadcast to the mobile stations relating to neighboring cells. The voice channels are used after
5 call setup to a mobile station and carry not only voice data but also certain signalling, for example, measurement channel numbers for the neighboring cells to the cell serving the mobile station, as well as a handoff order to the mobile and measured signal
10 strength from the neighboring cells to the cell serving the mobile station in the case of mobile assisted handoff (MAHO) under the IS-54 digital standard.

Referring now to FIG. 8, there is shown an overall block diagram of the equipment within the cellular
15 network within which the present invention is incorporated, including the public switched telecommunication network (PSTN) 51, a mobile switching center (MSC) 52, and a pair of illustrative base stations 53-54. Within the MSC 52 is a switch 55
20 controlled by a central processor 56 both of which are connected to an interface 57. The interface 57 of the MSC 52 is coupled by means of data lines 51 and 60 to each of the respective base stations 53 and 54. Each base station includes a multiplexer/demultiplexer 60
25 connected to a plurality of transceivers 63-65 connected to an antenna 66. Each transceiver includes a control unit 67 and a transmit unit 68 along with a receive unit 69. Calls to or from subscribers in the PSTN 51 are connected to the switch 55 within the MSC
30 52 where they are routed to the correct cell and voice channel controlled by the central processor 56. The central processor 56 also administers and processes data regarding the location of the mobile, the neighboring cells to the cell within which the mobile
35 is currently located, and control both call setup and



handoff. The links between the MSC 52 and the base stations 53 and 54 (links 61 and 62) carries voice data, as well as control information to and from the control unit 67 within each of the different transceivers 63-65 of the base stations 53 and 54. The base station equipment 53 and 54 consists of the multiplexer 60 which administrates distribution of voice data and control information to and from the different transceivers 63-65. The transceivers include both control channel transceivers and voice channel transceivers.

Referring next to FIG. 9, there is shown a mobile subscriber unit 71 including a receiver 72, a transmitter 73 connected to an antenna 74 through a duplexer 75. A control unit 76 is coupled to a synthesizer 77 which is also coupled to the transmitter 73 and receiver 72. A microphone 78 is connected to the transmitter 73 while a speaker 79 is connected to the receiver 72. The synthesizer 77 is used to tune the receiver 72 to the control channel frequencies before call setup and to different voice channel frequencies and measurement channel frequencies during the call and under control of the control unit 76. The control unit 76 measures by means of the receiver and the SYNT the signal strength of the signal being received by the receiver 72, receives neighbor list information from the base station via the receiver 72 and processes all of the information according to the algorithm and technique of the present invention.

In the present system a mobile unit in idle searches the assigned frequency spectrum being broadcast for an appropriate control channel for communication with the cellular network. All control channels are continuously transmitting and are cyclically broadcasting neighbor cell information which



is valid for the cell within which the mobile is currently located. The neighbor cell information consists of the following data:

- 5 1) Control channel frequencies for the neighbor cells;
- 2) The type of neighbor, i.e.
 - (a) Preferred neighbor,
 - (b) Non-preferred neighbor, or
 - (c) Neighbor with equal preference;
- 10 3) For preferred neighbors, a signal strength threshold value for each. This threshold value is the threshold of sufficient signal strength in the neighbor cell plus a corresponding hysteresis or offset value, which may be calculated in the central processor in the
15 MSC or in the control unit of the base station before it is sent;
- 4) For each control channel (cell), a signal strength threshold which is the threshold for sufficient signal strength when served by the cell,
20 i.e., preferred, cell but this time with the hysteresis value subtracted from that value; and
- 5) For all neighbors (with equal preference and for non-preferred neighbors) a hysteresis value.

25 The mobile station measures the signal strength periodically for the current channel and at the frequencies defined for the current cell's neighbors. The mobile then tunes to a preferred neighbor as soon as the measured signal strength for this neighbor is above the threshold set for this neighbor cell. If
30 more than one preferred neighbor is qualified, the mobile tunes to the neighbor with the best margin with respect to the threshold value. If, however, there is no qualified preferred neighbor cell and a neighbor cell with equal preference has a signal strength which
35 is higher than the signal strength to the current



channel with a margin which is defined by the hysteresis value for that particular neighbor, the mobile then retunes to this neighbor cell.

5 If the signal strength for the current channel is below its threshold defining sufficient signal strength and there is no qualified preferred neighbor and there is also no qualified neighbor with equal preference, and a non-preferred neighbor has a signal strength which is higher than the signal strength for the
10 current channel with a margin also added which is defined by the hysteresis value for that particular neighbor cell, the mobile tunes to this neighbor cell's control channel frequency.

15 When a call setup from the mobile is attempted, the mobile is already on an appropriate control channel according to the procedure set forth above and the call can be set up in the corresponding cell according to the well-established procedures.

20 Another way to provide the mobile with the frequencies, the neighbor types, two signal strength levels, i.e., the threshold and the hysteresis, and another hysteresis would be to broadcast the threshold and the hysteresis separately and let the mobile calculate the two levels.

25 Another way to describe the algorithm is: (1) tune to a preferred neighbor when the measured signal strength is "good enough"; (2) do not tune to a non-preferred neighbor when the measured signal strength for the currently serving cell is "good enough"; and
30 (3) tune to the best neighbor when the signal strength for the serving cell is not "good enough".

As an illustration of the above-referenced procedure, an example may be set forth with reference to FIG. 2. A mobile subscriber terminal moving from
35 umbrella cell A to umbrella cell B will first be tuned



to cell A's control channel frequency where it will receive broadcast information regarding control channel frequencies for neighboring cells B-G with equal preference as well as their hysteresis values together with the frequencies for the preferred neighbor microcells a, b, d, e and their corresponding threshold values. When the signal strength from microcell d is above the threshold value set for that cell, the mobile will retune to microcell d's control channel and receive information about microcell d's neighbor cells which are now microcell a and microcell c with equal preference, and umbrella cell A as a non-preferred neighbor cell. After having retuned to microcell c, the neighbors with equal preference will be microcell a, microcell b, and microcell d and the non-preferred neighbors will be umbrella cell A and umbrella cell B. Finally, when the mobile station has reached a location within umbrella cell B, it will have umbrella cells A, C and G as neighbors with equal preference and microcells a, b, c as preferred neighbors.

When a call is in progress within the system of the present invention and just after call setup and after handoff to a new cell, information about the control channel frequency or any other continuously transmitting frequency in each neighbor cell is sent to the mobile station. The mobile measures signal strength for the serving channel and the neighboring cells periodically and reports those values on the current voice channel to the base station. This information is processed in the control unit of the base station or in the central processor of the MSC according to precisely the same rules as was done in the mobile station during idle condition. As soon as a better serving base station is identified according to rules set forth above, a handoff is performed to



5 this new serving base station. If the base station or the mobile station uses power regulation, the signal strength or the threshold must be adjusted in order to get a comparison result. As if the radio transmitter was using the maximum allowed power level in the cell.

10 The system of the present invention provides an easier and more natural way to control selection of a cell at call setup and at handoff. The system also provides a system for optimal cell selection within such a multi-layered cell structure.

Referring next to FIG. 10, there is shown a flow chart illustrating certain functional performance in the system of the present invention. FIG. 10 illustrates a process performed within the mobile during idle period as follows: the routine begins at 101 and moves to 102 at which it selects a first channel. Thereafter, the mobile moves to 103 where it receives and stores information broadcast on the selected channel. Next, at 104 the mobile station measures the signal strength for the neighboring cells and for the serving channel. Thereafter, at 105 the mobile selects a first channel for evaluation and moves to 106 where it is determined whether or not that channel comes from a preferred neighbor cell. If so, 25 the system moves to 107 at which it is determined whether or not the signal strength for the neighbor cell is greater than a preselected threshold value plus the hysteresis, if any. If not, the system moves to 108 where it is determined whether or not the last 30 neighbor has been evaluated. If, however, at 107, the signal strength for the neighbor cell is greater than the threshold value plus the hysteresis, if any, the system moves to 109 and the mobile station retunes to this neighbor cell value and returns to 103 to receive

This Sheet Has Been Replaced



and store information broadcast on this newly selected channel.

5 If, however, at 106 the channel being evaluated is determined to not be a preferred neighbor cell, the system moves to 110 where it is determined whether or not the neighbor cell is one with equal preference. If not, i.e., the cell is a non-preferred neighbor cell, the system moves to 111 at which it determines whether or not the serving channel signal strength is less than
10 a preselected threshold value plus the hysteresis, if any. If not, it moves to 108 to determine if the last neighbor has been evaluated. If, at 111, it is determined that the serving channel signal strength is lower than the threshold value minus the hysteresis
15 value, if any, the system moves to 112 where it is determined whether or not the neighbor cell's signal strength is greater than the serving channel's signal strength and, if not, moves to 108 and determines whether or not the last neighbor has been evaluated.
20 If, at 112 the neighbor cell's signal strength is determined to be greater than the serving channel's signal strength, then the mobile station retunes to this neighbor cell at 109 and returns to 103 to receive and store information broadcast on this channel.
25 Similarly, if it is determined at 110 that this neighbor cell is a cell of equal preference, the system moves directly to 112 to evaluate the signal strength of that cell. If, at 108, the system determines if the last neighbor has been evaluated, the system returns to
30 104 and measures the signal strength for the neighboring cells in the serving channel as set forth above. If, however, the last neighbor cell is determined to have not been evaluated at 108, the system moves to 113 and selects the next neighbor for



evaluation returning to 106 to determine the preference of that particular neighbor.

5 It can thus be seen in FIG. 10 that the mobile station during idle period is continually cycling through the reception of channel information and determining whether or not it is appropriate to be handed off to a cell and applying a preference to those potential cells to which it may be handed off in accordance with the most efficient utilization of
10 channel availability.

It should be understood that the process described above relates to the implementation of the present invention within a digital cellular system employing mobile assisted handoff (MAHO) such as that specified
15 by the IS-54 standard promulgated by EIA/TIA. It should be clear that the invention could also be implemented within other digital or analog cellular systems in which radio signal strength measurements are made by the base stations of the various associated
20 cells.

Referring next to FIG. 11, there is also shown an alternate procedure for the evaluation of handoff likelihood in the mobile during an idle period. The routine begins at 121 where the mobile selects a first
25 channel at 122 and moves to 123 where it receives and stores information broadcast on that selected channel. Thereafter, the system moves to 124 and measures signal strength for the neighboring cells and serving channels thereof. Next, at 125 the system selects the first
30 channel for evaluation and clears a candidate channel list. Thereafter, at 126 the system determines whether or not the selected channel is that of a preferred neighbor and, if so, moves to 127 where the signal strength for the neighboring cell is evaluated to
35 determine whether or not it is above a preselected



threshold value plus the hysteresis, if any. If not, the system moves to 128 and it is determined whether or not the last neighbor has been evaluated. If, however, at 127, it has been determined that the signal strength for the neighboring cell was greater than the threshold value, the system moves to add this neighbor's cell to the candidate list at 129 and thereafter to decision 128 to evaluate whether or not the last neighbor has been evaluated. If, however, at 126 it is determined that the neighbor was not preferred, the system moves to 131 to determine whether or not the neighboring cell is one with equal preference or not. If not, i.e., it is a non-preferred neighbor, the system moves to 132 and determines whether or not the serving channel strength is less than a preselected threshold value minus the hysteresis, if any, and, if not, to decision 128 to determine if the last neighbor has been evaluated. If, however, at 132 the serving channel signal strength is determined to be greater than a threshold value plus the hysteresis, if any, the system moves to 133 at which it is determined whether or not the neighbor cell signal strength is greater than the serving channel signal strength and, if not, to a decision as to whether or not the last neighbor has been evaluated at 128. If the neighbor cell signal strength is greater than the serving channel signal strength, the system moves to 129 and adds this neighbor to the candidate list. If, at 131 it is determined that the cell is a neighbor with equal preference, the system moves directly to decision 133 to determine if the neighboring cell signal strength is greater than the serving channel signal strength.

If, at decision 128 it is determined that the last neighbor has not been evaluated, the system moves to 134 to select the next neighbor for evaluation and

This Sheet Has Been Replaced



thereafter to decision 126 to begin that evaluation. If the last neighbor has been evaluated at 128, the system moves to 135 and determines whether or not any candidates have been found. If not, the system returns
5 to 124 and, if so, moves to 136 to sort the candidate list. Thereafter, the system moves to 137 and retunes to the first candidate on the list followed by moving to 123 where it receives and stores the information broadcast on that selected channel.

10 As shown in FIG. 11, again the system engages in an orderly evaluation of possible channels and selects a channel based upon criteria determined to provide maximum efficiency and channel utilization in a multi-layered cell structure.

15 Referring next to FIGS. 12a-12b, there is shown a routine which may be executable in the system by either the mobile station and/or base station during an established call within an exemplary digital cellular system. The system begins at 151 by moving to 152 at
20 which it transfers neighbor cell information from the base station to the mobile. Thereafter, at 153 the system measures the signal strength for the neighboring cells and serving channels. Next, at 154 the system selects a first channel for evaluation and clears a
25 candidate list. Thereafter, at 155 the system determines if the selected channel is from a preferred neighbor cell and, if so, moves to 156 where it determines whether or not the signal strength for that neighbor cell is greater than the preselected threshold
30 value plus the hysteresis, if any. If not, the system moves to 157 and determines if the last neighbor has been evaluated. If, at 156 the signal strength of the neighboring cell is greater than the threshold value plus the hysteresis, if any, the system moves to 158
35 and adds this neighbor to the candidate list. If, at



155 the cell is determined not to be a preferred neighbor, the system moves to 159 to determine if the neighboring cell is one with equal preference and, if not, to 161 to determine if the serving channel signal strength is less than the preselected value minus the hysteresis, if any. If not, the system moves to 157 to determine if the last neighbor has been evaluated. However, if so, the system moves to 162 where it is determined whether or not the neighboring cell signal strength is greater than a serving channel signal strength plus the hysteresis, if any, and, if so, to 158 to add this neighbor to a candidate list and, if not, to 157 to determine if the last neighbor has been evaluated. If, at 159 it is determined that the neighboring cell is one with equal preference, the system moves directly to 162 to determine if that neighboring cell signal strength is greater than the serving channel signal strength plus the hysteresis, if any.

20 If it is determined at 157 that the last neighbor has not been evaluated, the system moves to 163 to select the next neighbor for evaluation and thereafter evaluates it beginning at step 155. If, at 157 it is determined that the last neighbor has been evaluated, the system moves to 164 to determine if candidates are found and, if not, back to 153 to measure the signal strength for neighbors and the serving channels. If candidates are found at 164, the system moves to 165 to sort the candidate list and, thereafter to 166 to select a first candidate cell for a handoff attempt. At 167, the system determines whether or not an idle channel exists in the candidate cell and, if not, moves to 168 to determine if this is the last candidate and, if so, to 169 wherein it selects the next candidate cell for a handoff attempt. If the cell was the last



candidate at 168, the system moves back to 153 to measure the signal strength for neighbors and serving channels. If the idle channel in the candidate cell exists, the system moves to 171 and hands off to this candidate cell and, thereafter, returns to 152 to transfer neighboring cell information to the mobile.

As can be seen, the system of the present invention utilizes algorithms which maximize the channel utilization from various cells within a multi-layered cell structure in a highly efficient manner.

As can be seen from the above description, the present invention allows a multi-layered cellular communication system to monitor channel signal strength in a plurality of cells on multiple levels and perform an evaluation in accordance with an algorithm which maximizes the channel availability within the multi-layered cellular structure.

It is believed that the operation and construction of the present invention will be apparent from the foregoing description and, while the method and apparatus shown and described has been characterized as being preferred, obvious changes and modifications may be made therein without departing from the spirit and scope of the invention as defined in the following claims.

This Sheet Has Been Replaced





WHAT IS CLAIMED IS:

1. A method of performing handoff of a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas, said method comprising:

assigning within each cell categories of preference with respect to each other associated cell within the system as to which said cell's service area is either coextensive, adjacent, contiguous, or overlapping;

measuring the strength of the radio signals providing communication between the mobile station and the base station serving each of the associated cells within the system;

comparing the signal strength of each radio signal to a preselected threshold value; and

determining whether to handoff the mobile to a base station serving an associated cell based upon whether the signal strength of the radio signal therefrom is greater than said threshold value and the preference assigned to said associated cell.

2. A method of performing handoff as set forth in claim 1 in which the categories of preference assigned with each cell to each associated cell includes preferred, equal preference and non-preferred.

3. A method of performing handoff as set forth in claim 2 in which an associated cell is assigned a preferred preference category if its service area is substantially smaller than that of the cell, an equal preference category if its service areas is substantially the same as that of the cell and a non-





preferred preference category if its service area is substantially larger than that of the cell.

5 4. A method of performing handoff as set forth in claim 2 in which said cells include macrocells, microcells and picocells.

10 5. A method of performing handoff as set forth in claim 1 in which the radio signal of which the signal strength is measured is the signal broadcast by the mobile station to the base station.

15 6. A method of performing handoff as set forth in claims 2 in which said determining step comprises:
first determining if the signal received from each cell comes from a preferred, equal or non-preferred cell having a particular preference and then, in response to said first determination, determining whether or not the received signal strength value is
20 greater than said threshold value.

25 7. A method of performing best server selection for a mobile station served on a first radio channel by a first base station serving a first cell and operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas, said method comprising:
assigning within each cell categories of preference with respect to each other associated cell
30 within the system as to which said cell's service area is either coextensive, adjacent, contiguous, or overlapping, each associated cell being assigned a category of preferred, equal preference or non-preferred based upon the size of its service area





relative to that of the cell within which said assignment is made;

receiving and storing information broadcast on a second radio channel by a second base station serving a second associated cell;

measuring the signal strength of the radio signals broadcast on said first and second radio channels, respectively;

determining the preference category of the cell from which said second radio channel signal is received;

selecting the second base station broadcasting the second radio channel as the best server in response to any one of the following conditions, (a) the second cell having a preference category of preferred and the signal strength of the radio signal of said second radio channel being greater than a preselected value, (b) the second cell having a preference category of equal preference and the signal strength of the radio signal of the second radio channel being greater than the signal strength of the radio signal of the first radio channel, or (c) the second cell having a preference category of non-preferred and the signal strength of the first radio channel being less than a preselected value and the signal strength of the radio signal of the second radio channel being greater than that of the first radio channel.

8. A method of performing best server selection as set forth in claim 7 in which an associated cell is assigned a preferred preference category if its service area is substantially smaller than that of the first cell, an equal preference category if its service areas is substantially the same as that of the first cell and

This Sheet Has Been Replaced





a non-preferred preference category if its service area is substantially larger than that of the first cell.

5 9. A method of performing best server selection as set forth in claim 7 in which an associated cell is assigned a preferred preference category within said first cell if it is a cell which is either coextensive, adjacent, contiguous or overlapping said first cell in its service area.

10

 10. A method of performing best server selection as set forth in claim 9 in which said mobile station sequentially receives and stores information broadcast on a radio channel by each of the cells associated with
15 said first cell and thereafter evaluates the base station of each of said associated cells as a possible best server in accordance with the additional steps of said method.

20

 11. A method of performing best server selection as set forth in claim 7 in which said associated cells to said first cell may include macrocells, microcells and picocells.

25

 12. A method of performing best server selection as set forth in claim 7 in which the radio signals of which the signal strength is measured are the signals broadcast by the mobile station to the base station.

30

 13. A method of performing best server selection as set forth in claim 7 in which the radio signals of which the signal strength is measured are the signals broadcast by the base station to the mobile station.

This Sheet Has Been Replaced





14. A system for performing handoff of a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas, said system comprising:

means for assigning within each cell categories of preference with respect to each other associated cell within the system as to which said cell's service area is either coextensive, adjacent, contiguous, or overlapping;

means for measuring the strength of the radio signals providing communication between the mobile station and the base station serving each of the associated cells within the system;

means for comparing the signal strength of each radio signal to a preselected threshold value; and

means for determining whether to handoff the mobile to a base station serving an associated cell based upon whether the signal strength of the radio signal therefrom is greater than said threshold value and the preference assigned to said associated cell.

15. A system for performing handoff as set forth in claim 14 in which the categories of preference assigned with each cell to each associated cell includes preferred, equal preference and non-preferred.

16. A system for performing handoff as set forth in claim 15 in which an associated cell is assigned a preferred preference category if its service area is substantially smaller than that of the cell, an equal preference category if its service areas is substantially the same as that of the cell and a non-preferred preference category if its service area is substantially larger than that of the cell.





17. A system for performing handoff as set forth in claim 15 in which said cells include macrocells, microcells and picocells.

5

18. A system for performing handoff as set forth in claim 14 in which the radio signal of which the signal strength is measured is the signal broadcast by the mobile station to the base station.

10

19. A system for performing handoff as set forth in claims 15 in which said means for determining includes:

means for first determining if the signal received from each cell comes from a preferred, equal or non-preferred cell having a particular preference and means for then responding to said first determination, and determining whether or not the received signal strength value is greater than said threshold value.

20

20. A system for performing best server selection for a mobile station served on a first radio channel by a first base station serving a first cell and operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas, said method comprising:

25

means for assigning within each cell categories of preference with respect to each other associated cell within the system as to which said cell's service area is either coextensive, adjacent, contiguous, or overlapping, each associated cell being assigned a category of preferred, equal preference or non-preferred based upon the size of its service area

30

This Sheet Has Been Replaced





relative to that of the cell within which said assignment is made;

means for receiving and storing information broadcast on a second radio channel by a second base station serving a second associated cell;

means for measuring the signal strength of the radio signals broadcast on said first and second radio channels, respectively;

means for determining the preference category of the cell from which said second radio channel signal is received;

means for selecting the second base station broadcasting the second radio channel as the best server in response to any one of the following conditions, (a) the second cell having a preference category of preferred and the signal strength of the radio signal of said second radio channel being greater than a preselected value, (b) the second cell having a preference category of equal preference and the signal strength of the radio signal of the second radio channel being greater than the signal strength of the radio signal of the first radio channel, or (c) the second cell having a preference category of non-preferred and the signal strength of the first radio channel being less than a preselected value and the signal strength of the radio signal of the second radio channel being greater than that of the first radio channel.

21. A system for performing best server selection as set forth in claim 20 in which an associated cell is assigned a preferred preference category if its service area is substantially smaller than that of the first cell, an equal preference category if its service areas is substantially the same as that of the first cell and





a non-preferred preference category if its service area is substantially larger than that of the first cell.

5 22. A system for performing best server selection as set forth in claim 20 in which an associated cell is assigned a preferred preference category within said first cell if it is a cell which is either coextensive, adjacent, contiguous or overlapping said first cell in its service area.

10

 23. A system for performing best server selection as set forth in claim 22 in which said system sequentially receives and stores information broadcast on a radio channel by each of the cells associated with said first cell and thereafter evaluates the base station of each of said associated cells as a possible best server in accordance with the additional means in said system.

20

 24. A system for performing best server selection as set forth in claim 20 in which said associated cells to said first cell may include macrocells, microcells and picocells.

25

 25. A system for performing best server selection as set forth in claim 20 in which the radio signals of which the signal strength is measured are the signals broadcast by the mobile station to the base station.

30

 26. A system for performing best server selection as set forth in claim 20 in which the radio signals of which the signal strength is measured are the signals broadcast by the base station to the mobile station.

This Sheet Has Been Replaced





27. A method of performing server selection for a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas, said method comprising:

5 providing within each cell a list of neighboring cells the service areas of which are proximately associated with the service area of said cell;

10 assigning a selected radio channel signal strength level which is acceptable for service of a mobile station by each of said cells;


15 assigning within each cell categories of preference with respect to each of said neighboring cells on said list;

20 measuring the strength of the radio signals providing communication between the mobile station and the base station of the cell currently serving the mobile station as well of each of the neighboring cells thereof; and

25 selecting as a server for the mobile station the base station of any neighboring cell on said list the preference category of which is preferred to the currently serving cell and the measured strength of the radio signal providing communication therewith is at least equal to that assigned as an acceptable service level.

28. A method of performing handoff as set forth in claim 27 which includes the additional step of
30 assigning a selected radio channel signal strength level hysteresis value for each of said neighboring cells to said serving cell and in which said selecting step further comprises:



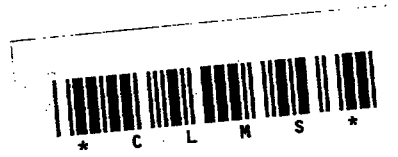

only selecting a neighboring cell as a server for the mobile station in the event that the measured signal strength of the radio signal providing communication with said neighboring cell is greater
5 than the assigned acceptable service signal strength level by an amount at least equal to the hysteresis value assigned thereto.

29. A method of performing handoff as set forth
10 in claim 27 in which the categories of preference assigned within each cell to each neighboring cell includes preferred, equal preference and non-preferred.

30. A method of performing server selection for
15 a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas, said method comprising:

providing within each cell a list of
20 neighboring cells the service areas of which are proximately associated with the service area of said cell;

assigning a selected radio channel signal strength level which is acceptable for service of a
25 mobile station by each of said cells;

assigning within each cell categories of preference with respect to each of said neighboring cells on said list;

measuring the strength of the radio signals
30 providing communication between the mobile station and the base station of the cell currently serving the mobile station as well of each of the neighboring cells thereof; and

selecting as a server for the mobile station
35 the base station of any neighboring cell on said list





the preference category of which is of equal preference to the currently serving cell and the measured strength of the radio signal providing communication therewith is greater than the measured signal strength of the radio signal providing communication with the currently serving cell.

31. A method of performing handoff as set forth in claim 30 which includes the additional step of assigning a selected radio channel signal strength level hysteresis value for each of said neighboring cells to said serving cell and in which said selecting step further comprises:

only selecting a neighboring cell as a server for the mobile station in the event that the measured signal strength of the radio signal providing communication with said neighboring cell is greater than that of the currently serving cell by an amount at least equal to the hysteresis value assigned thereto.

32. A method of performing server selection for a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells, each of said cells being provided with radio service by a base station the broadcast power of which and the resultant service area which varies from larger to smaller, said method comprising:

providing within each cell a list of neighboring cells the service areas of which are proximately associated with the service area of said cell;

assigning a minimum radio channel signal strength value which is acceptable for service to a mobile station by each of said cells;

This Sheet Has Been Replaced



measuring the strength of the radio signals providing communication between the mobile station and the base station of the cell currently serving the mobile station as well of each of the neighboring cells thereof; and

5

selecting as a server for the mobile station from among the currently serving cell and its neighboring cells the cell having both the smallest service area and a radio signal strength which is at least equal to said minimum acceptable value.

10

This Sheet Has Been Replaced



ABSTRACT

BEST SERVER SELECTION IN LAYERED CELLULAR RADIO SYSTEM

A multi-level layered cellular radio architecture serves mobile subscriber stations (21) moving within the system. Best server selection is performed for the mobile stations (21) by assigning within each cell (C1-C10) a preference value to each other one of the cells (C1-C10) with which is associated by proximity of service area. The strength of the radio signal received by the mobile station (21) from the serving cell (C1-C10) as well as the radio channels of associated cells (C1-C10) is measured. A decision as to the best serving cell (C1-C10) for the mobile station (21) is made based upon both the preference value of the associated cells (C1-C10) and the signal strength of their respective radio channels.

(Figure 2).

This Sheet Has Been Replaced



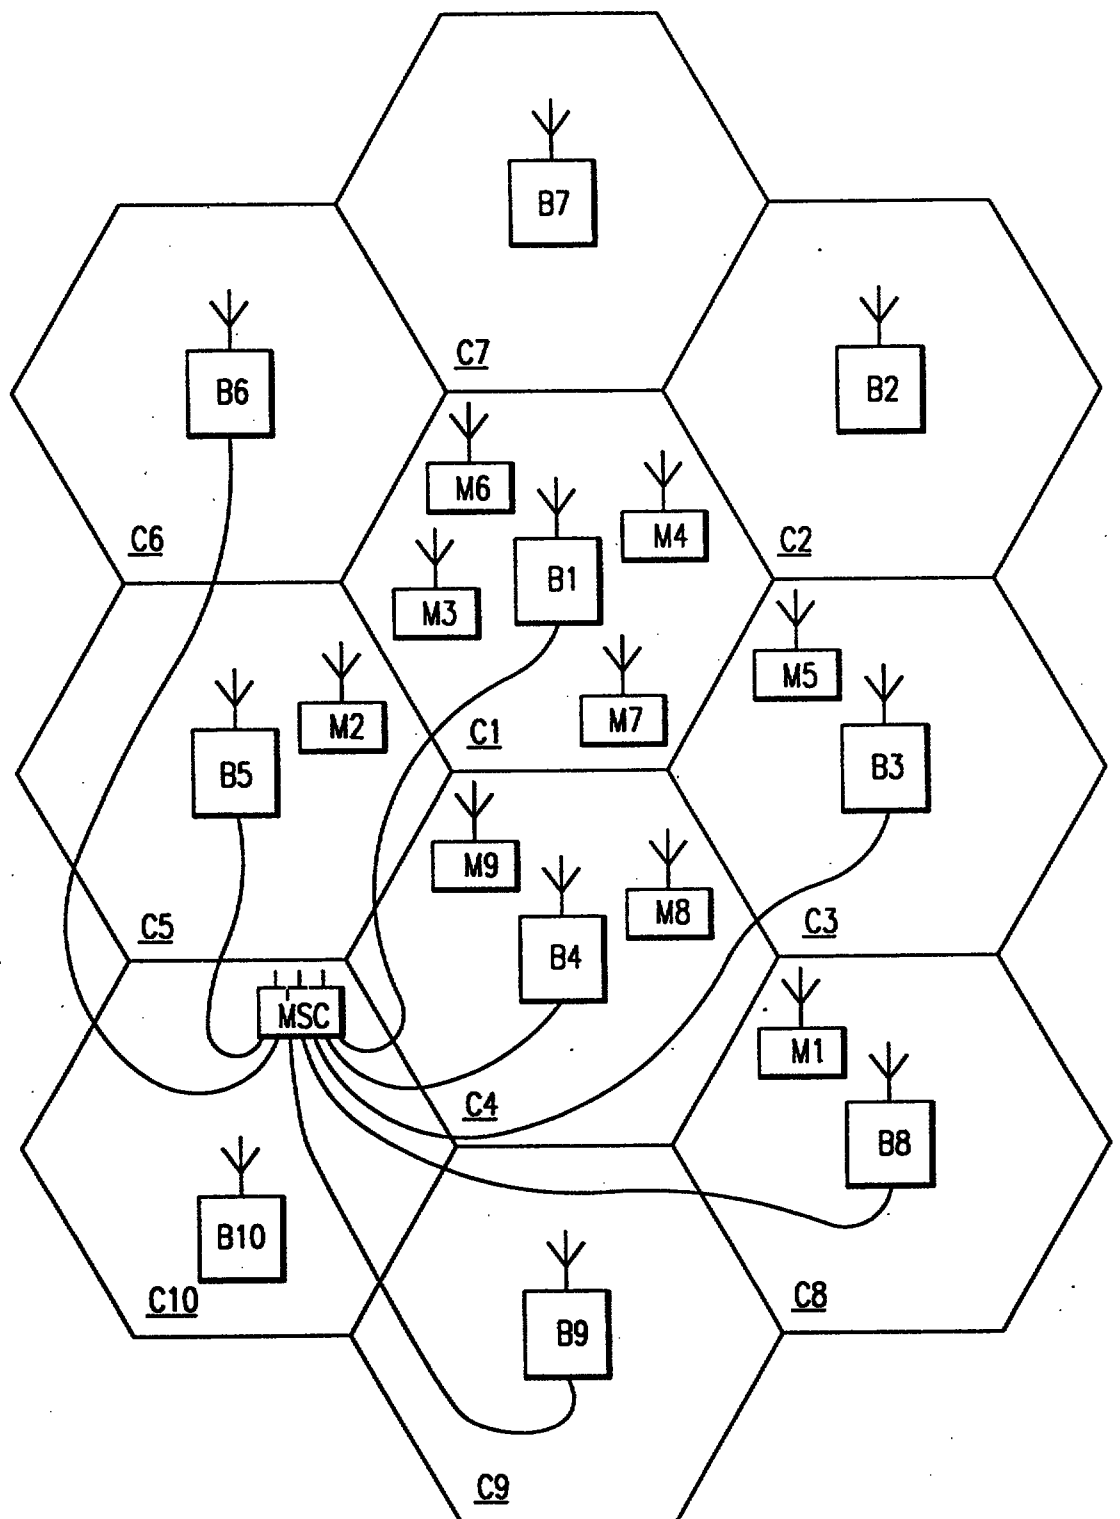


FIG. 1

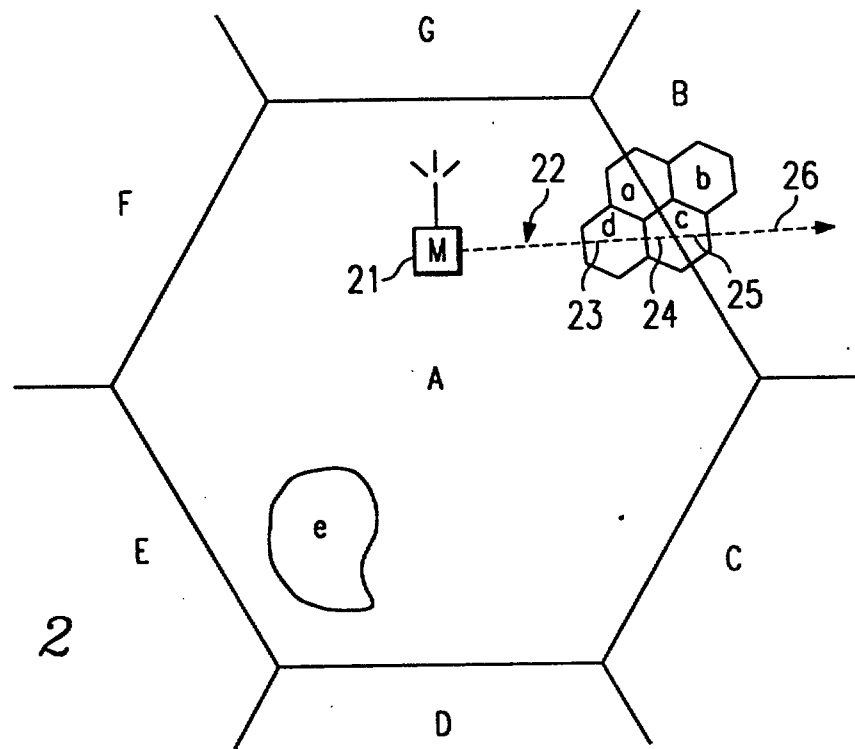


FIG. 2

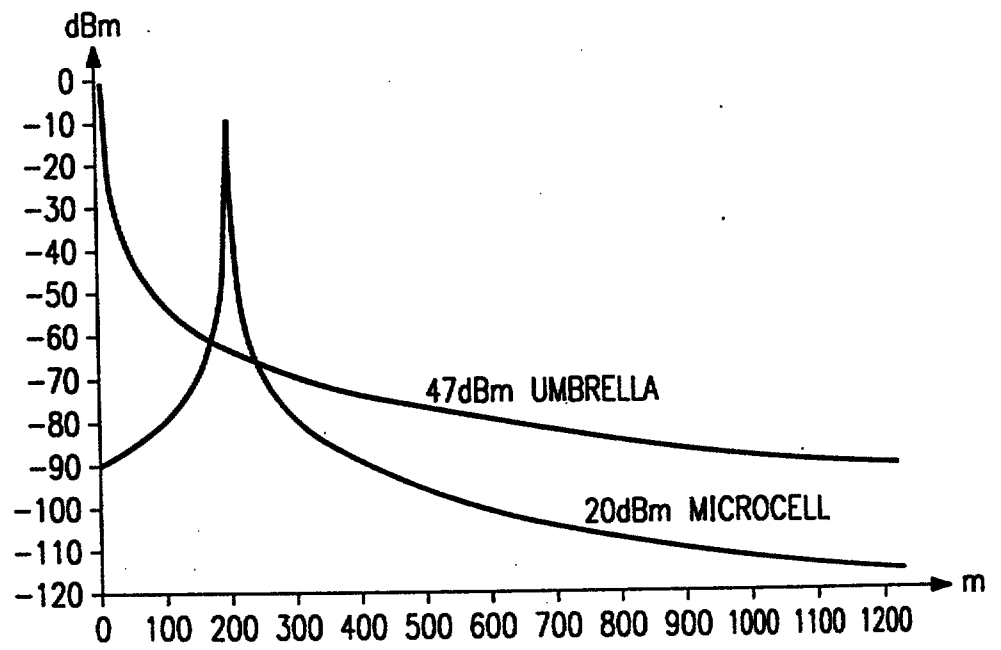
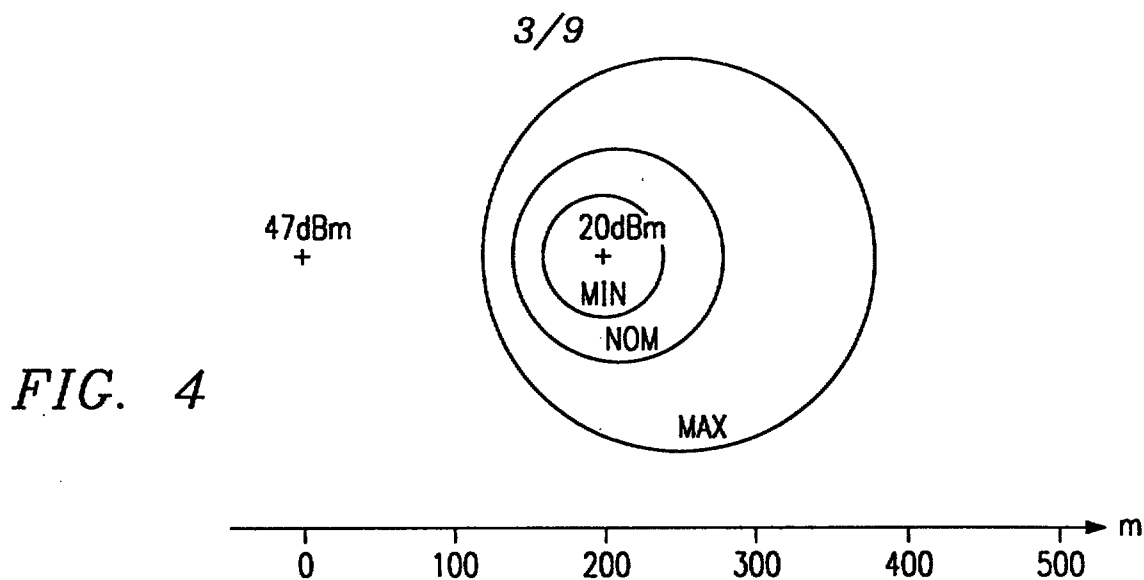
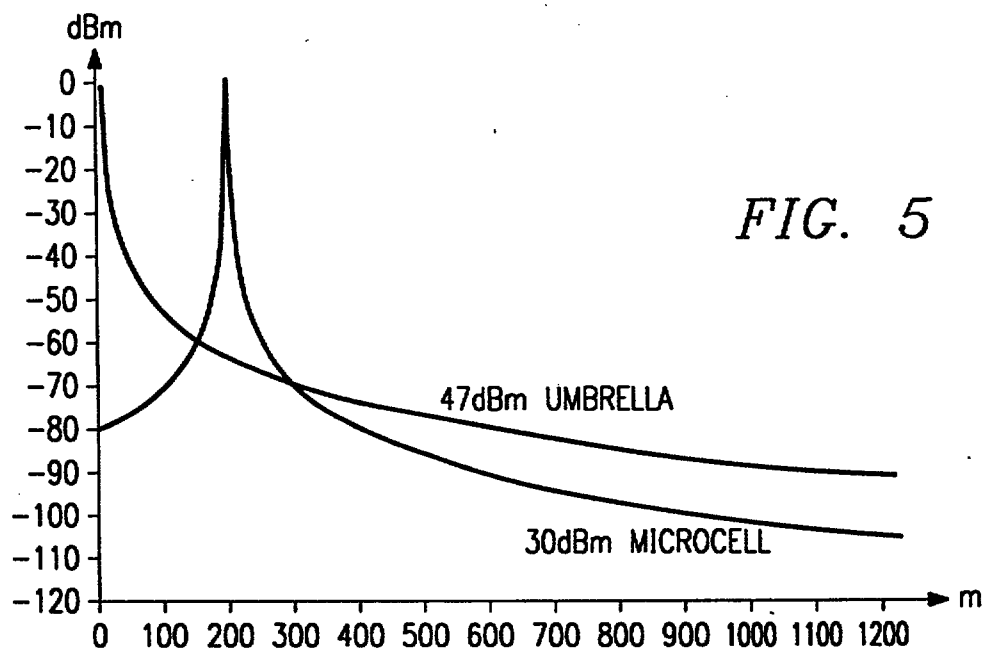
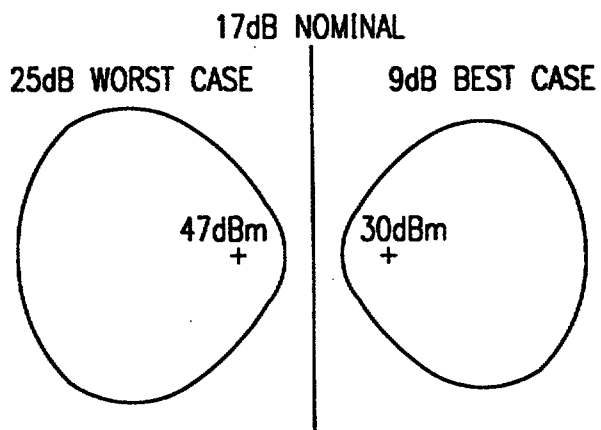


FIG. 3



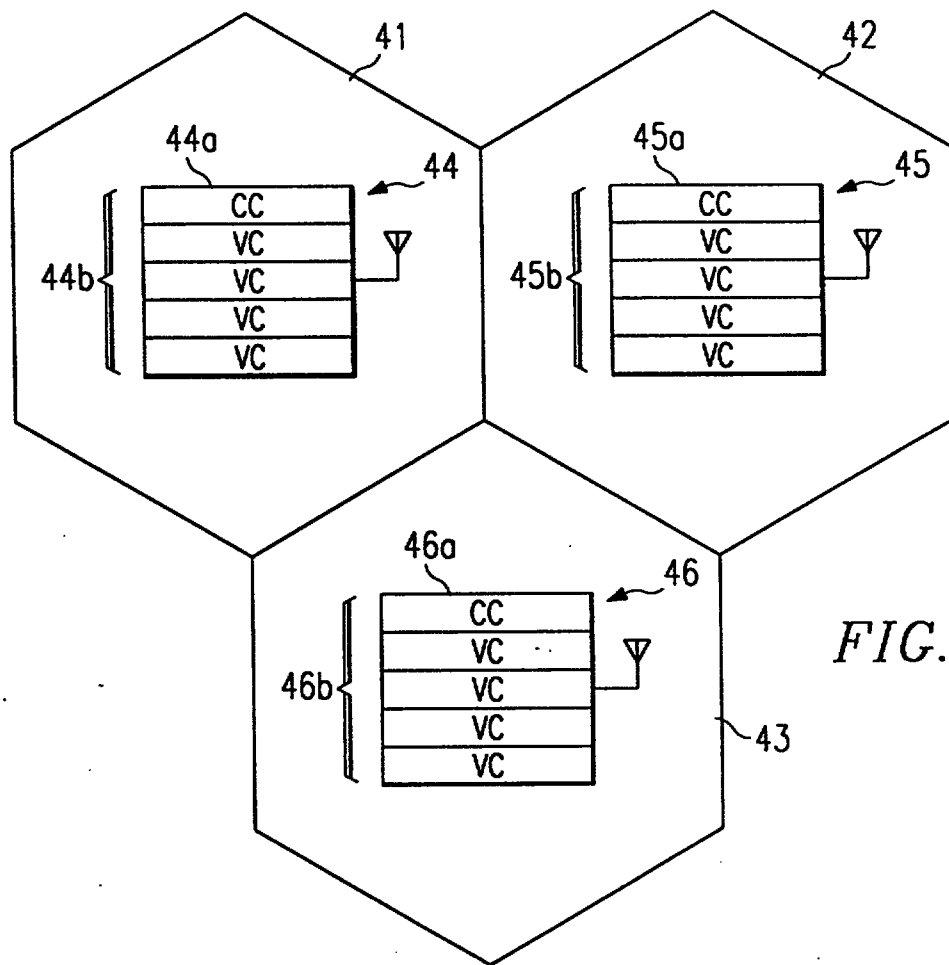


FIG. 7

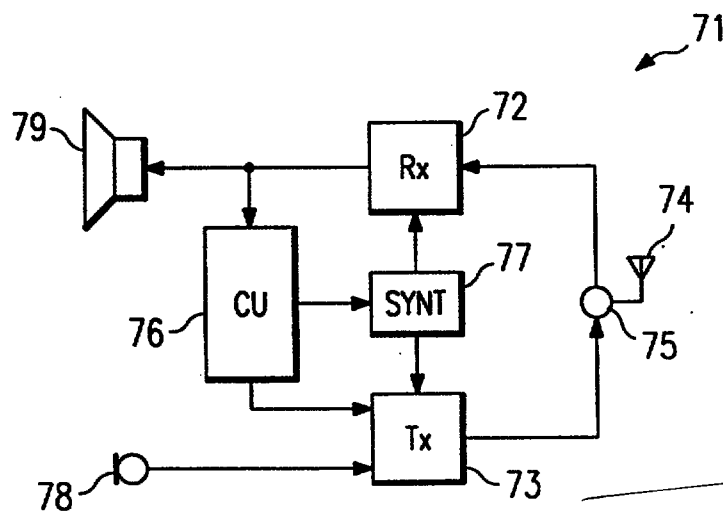


FIG. 9



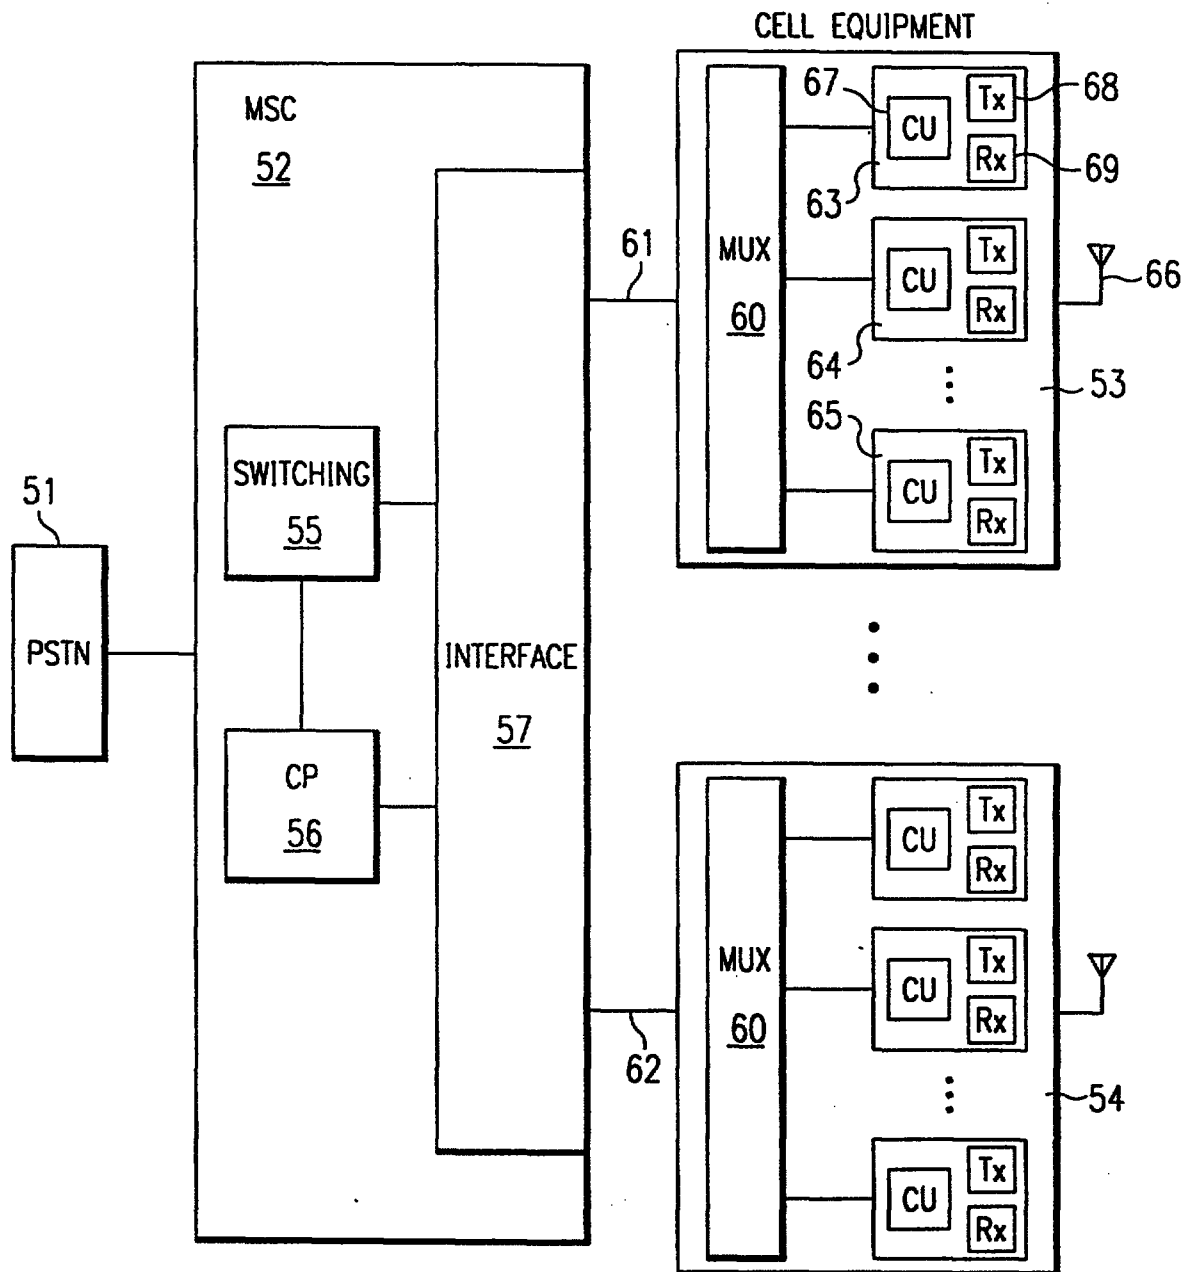
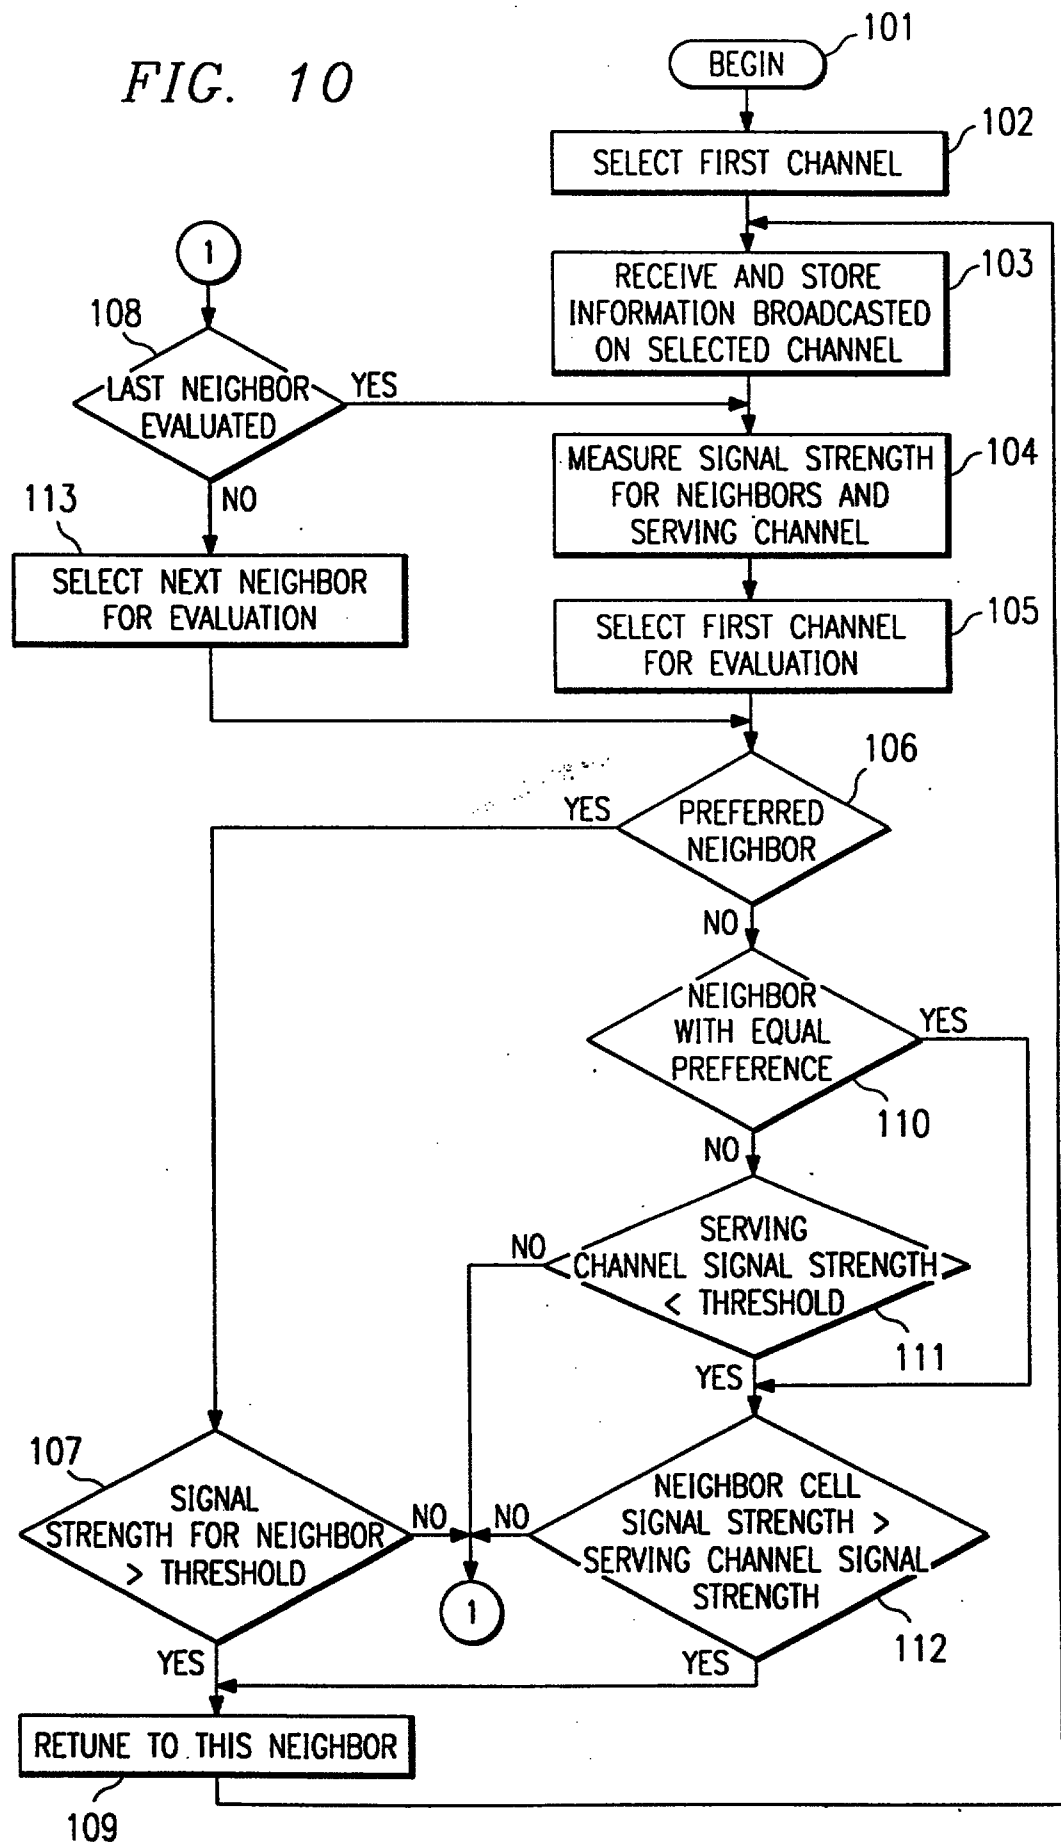


FIG. 8



FIG. 10



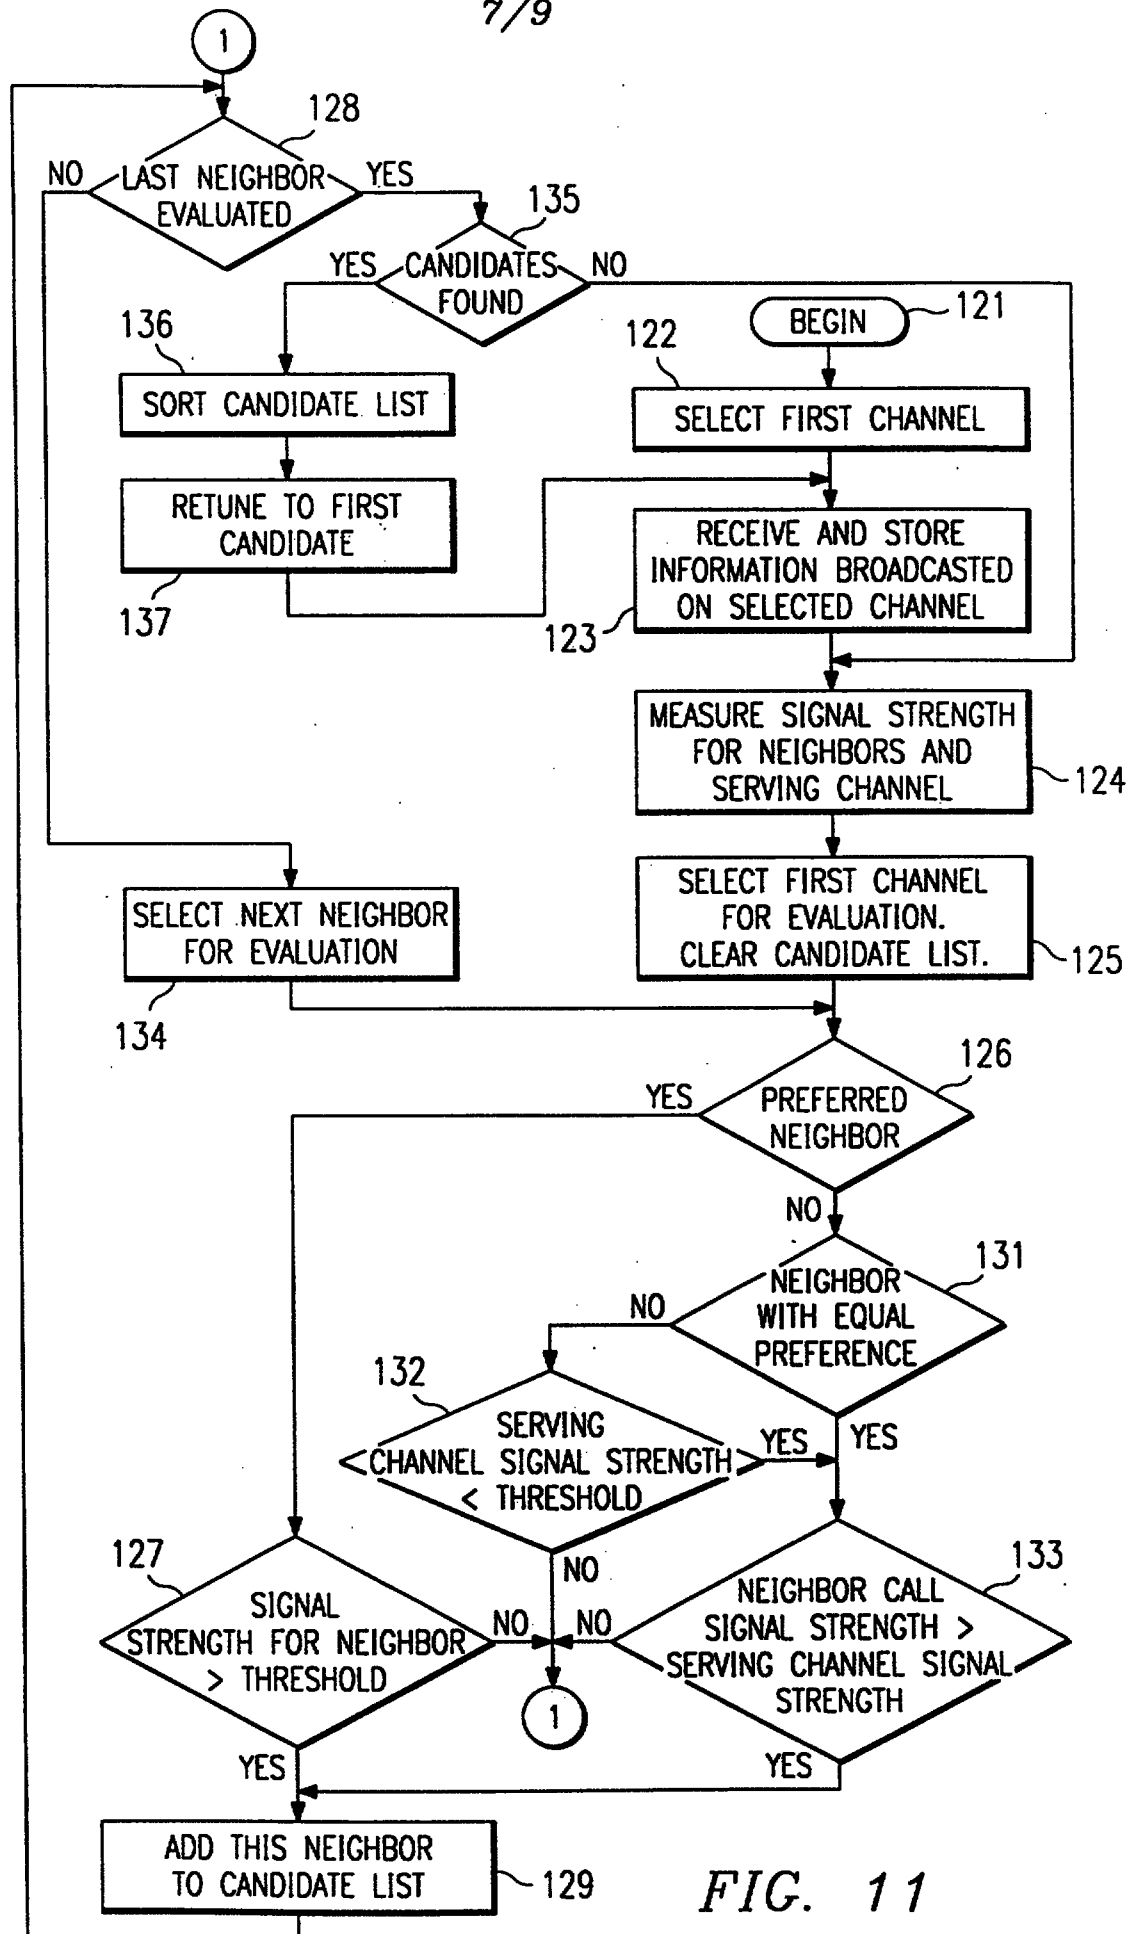
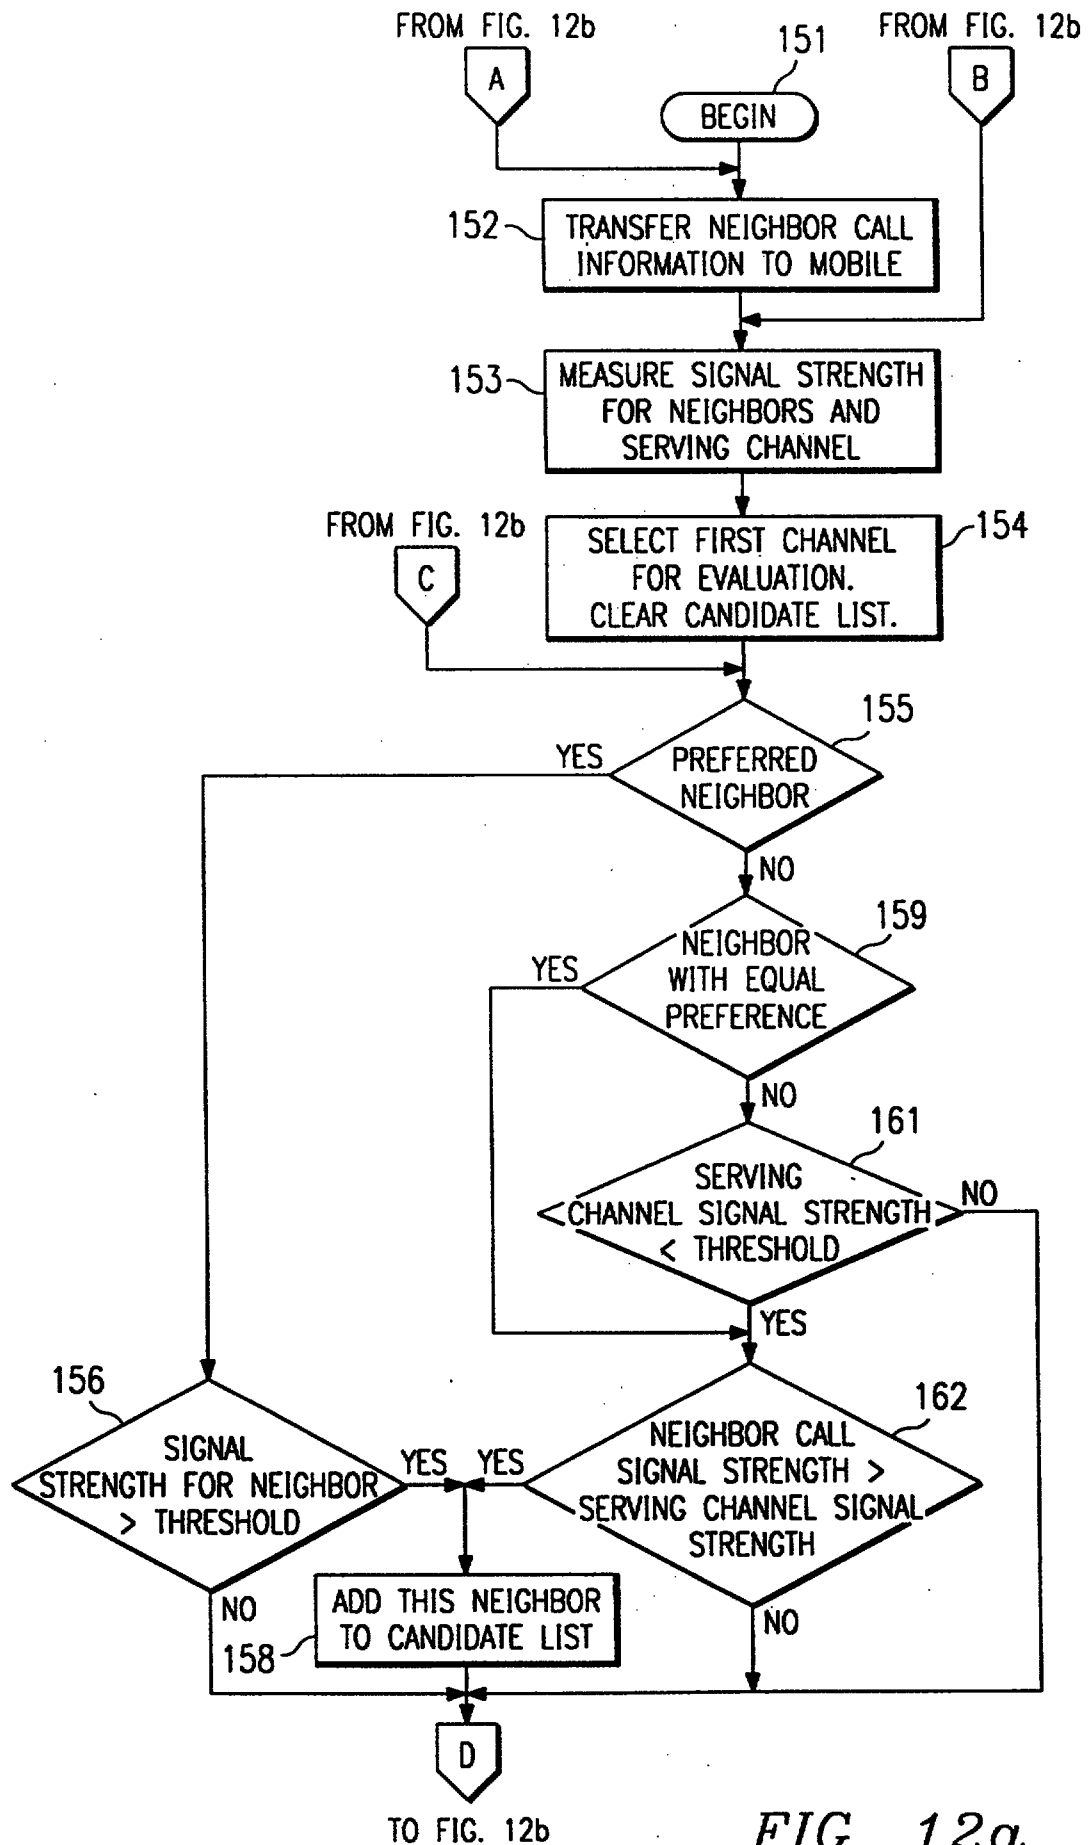


FIG. 11




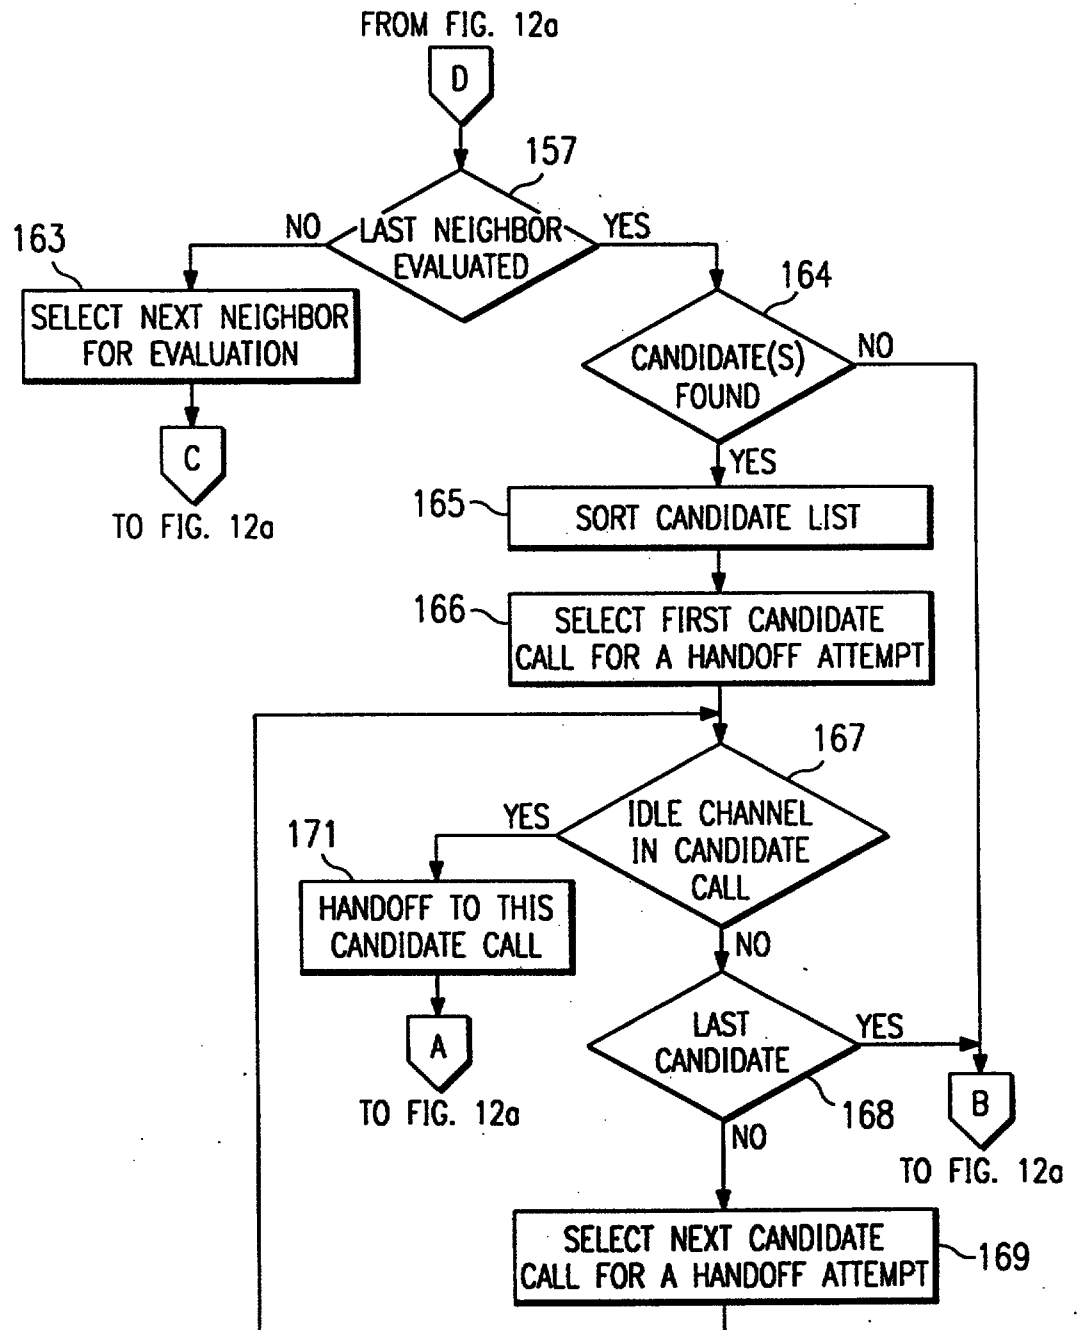


FIG. 12b

1-884103

4/9

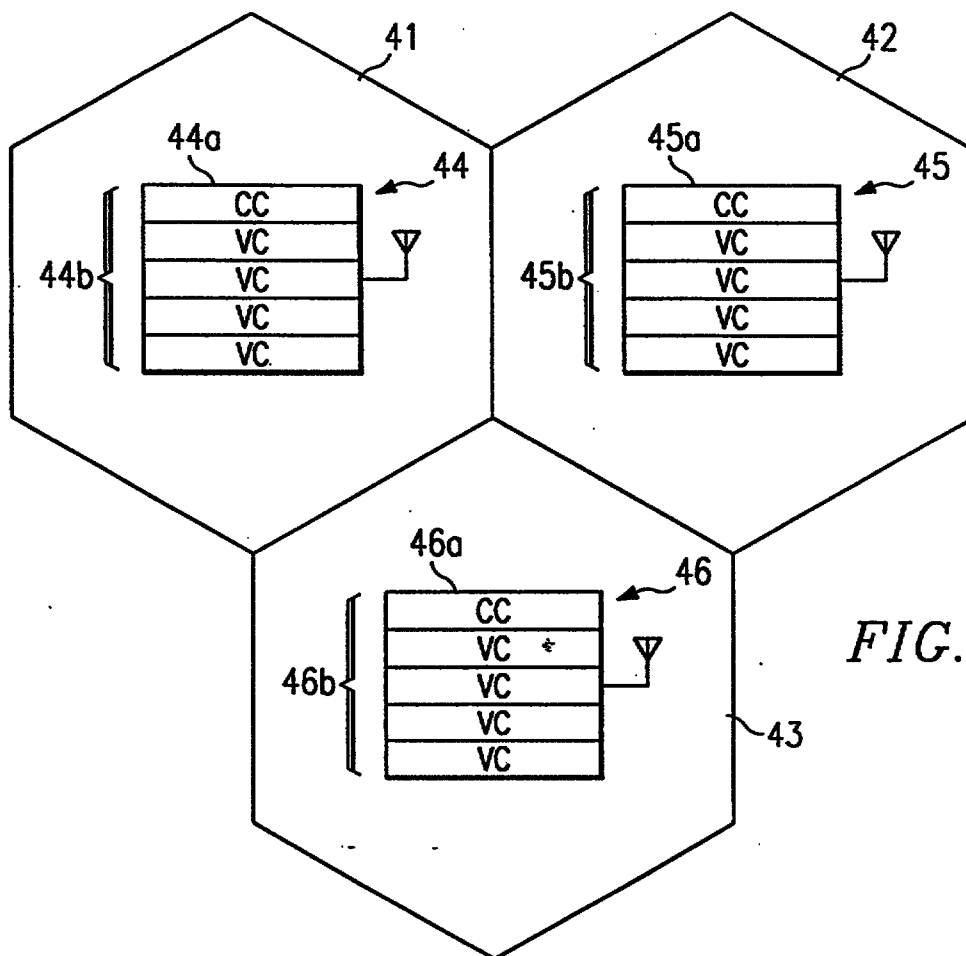

5/9

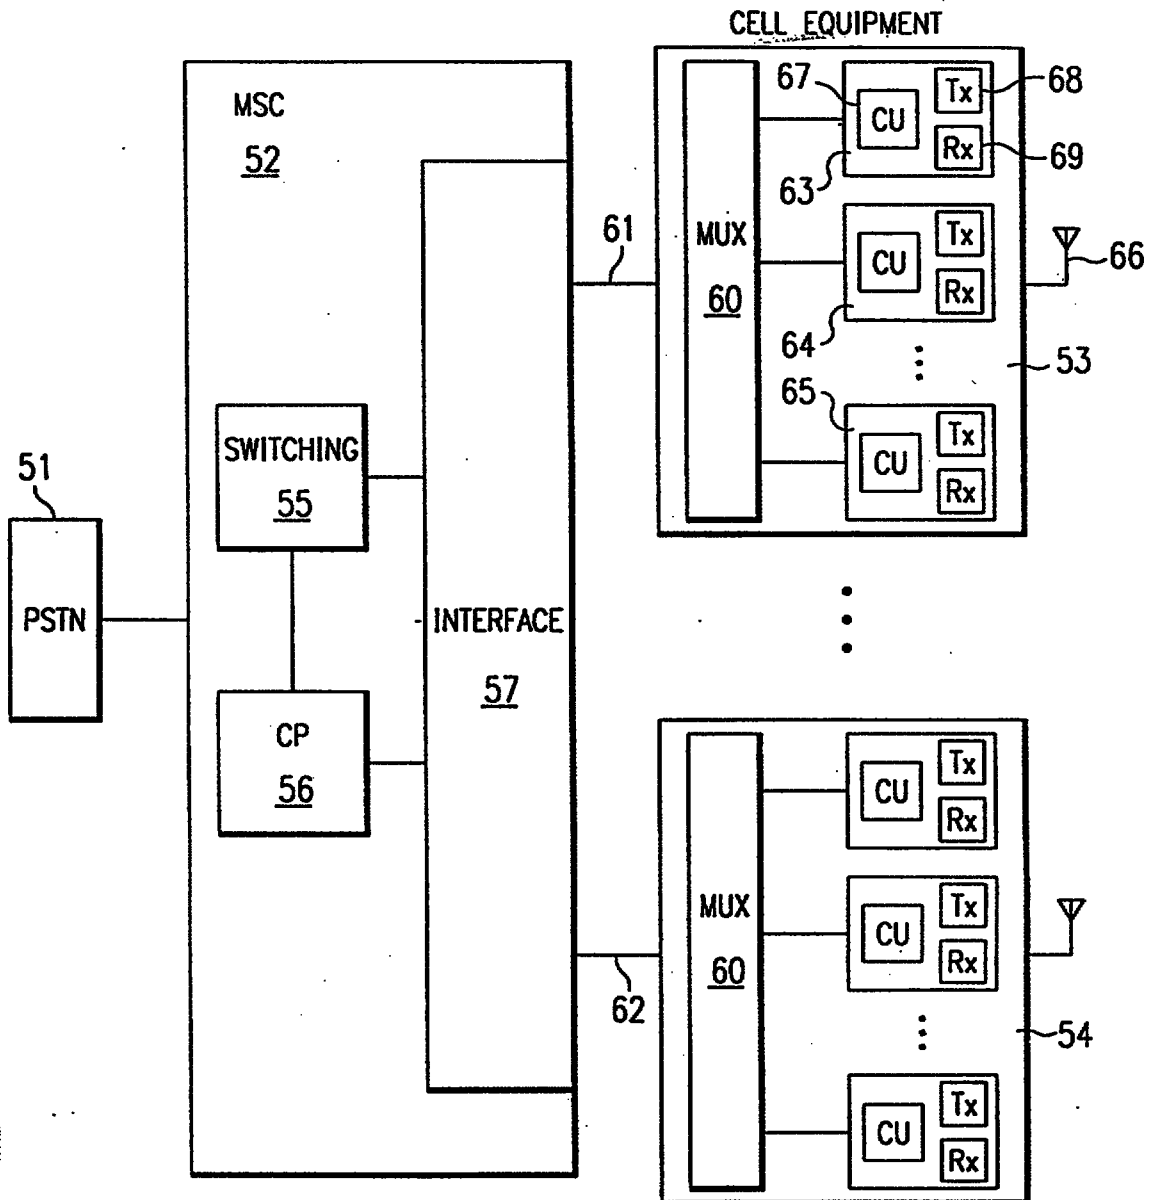


FIG. 8

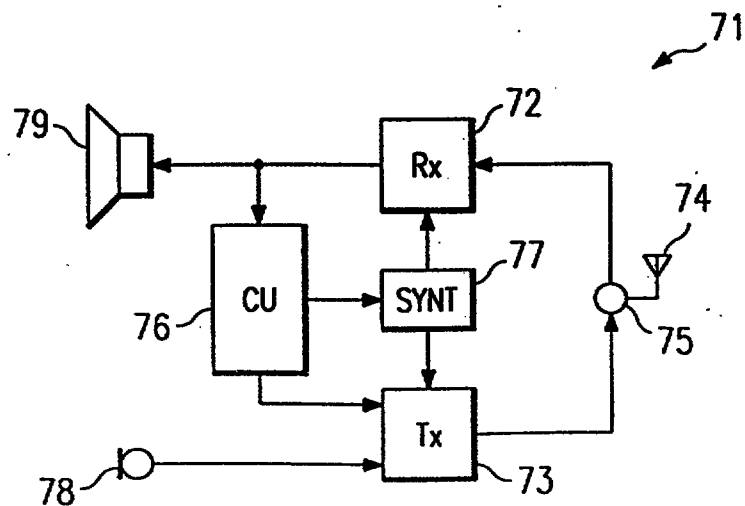


FIG. 9

**BEST SERVER SELECTION IN LAYERED
 CELLULAR RADIO SYSTEM**

BACKGROUND OF THE INVENTION

5 **Field of the Invention**

The invention relates to handoff of mobile stations within cellular radio systems and, more particularly, to handoff within layered cell structures of such systems.

10 **History of the Related Art**

In cellular radio communication systems a geographic area is divided into a plurality of individual regions referred to as cells, each of which is provided with radio service on a plurality of
 15 separate RF channels the frequencies of which are reused among different cells sufficiently separated from one another that there is a sufficiently low level of interference between them. When a mobile station receiving radio service from a particular base station
 20 serving a particular cell moves from that cell into another adjacent cell, communication with the mobile station is "handed off" from the first base station to the second base station serving the adjacent cell. Such handoff is accomplished by a mobile switching
 25 center (MSC) to which all of the base stations are connected and which controls the allocation of communication channels to the individual mobiles moving throughout the region served by the cells.

As the demand for cellular radio service increases
 30 over time, the capacity of existing systems has been severely stressed to serve all the subscribers who would like to have access to the system, particularly in major metropolitan areas. To address this demand, cellular radio technology is currently moving from
 35 analog based systems, in which each subscriber communication channel is allocated to a single radio channel, to digital based systems in which a plurality

This is the replacement sheet

Date

13 DEC 1997

AMENDED SHEET

of subscriber channels can be assigned to each radio channel through time division multiple access (TDMA) radio technology. In TDMA radio, each radio channel is divided into a plurality of time slots and a digitized portion of each subscriber's conversation is broadcast in an assigned time slot. However, even with such improvements in channel capacity, there exist certain areas within major metropolitan areas in which the demands on the system are so great that it cannot be successfully satisfied by existing cellular radio architectures. For example, in the area in and around a convention center located in a major metropolitan area, the channel usage by portable cellular radio transceivers may be so great that the demands for service cannot be satisfied by the entire channel capacity of the base station serving the cell within which the convention center is located. In such situations, it has been proposed to provide additional "layers" of cellular radio coverage provided by additional lower powered base stations located within an existing, so-called "umbrella" cell and referred to as "microcells". Such microcells may have a coverage or service area on the order of a few hundred meters in contrast to a few kilometers of coverage by the base station of the overlying umbrella cell. A plurality of such microcells may be located adjacent to one another and form a contiguous coverage area of substantial width all of which is within the overall coverage area of the umbrella cell.

When a layered cell structure, as described above in conjunction with umbrella cells and microcells, is used there is provided an enhanced level of radio capacity which can be configured for individual circumstances and which provides an assurance that users can receive service despite an extremely high

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

demand within a very small geographic area. Moreover, additional layers of radio coverage may be added, for example, by a plurality of either contiguous or separated "pico cells" positioned within the coverage or service area of the individual microcells, each of which are in turn within the overall umbrella cell. The base stations providing the radio coverage within the pico cells would be of even still lower power than the base stations serving the microcells and have a coverage or service area of, for example, a hundred meters to provide coverage within a single building or a single floor within a large convention center.

Thus, in layered cell architectures, the issue of server selection and handoff of each mobile radio transceiver moving within a geographic area involves many more options. That is, it is possible for the mobile station to receive radio service at any given moment from either a pico cell base station, a microcell base station, or an umbrella cell base station. When conventional handoff criteria used in single layered cellular architectures are applied to this situation, problems arise and the solution is less than ideal. The ability to configure the handoff arrangement for maximum efficiency with respect to the utilization of channel availability and consistent with high quality radio service to each mobile subscriber is highly desirable.

When handoff is effected between adjacent cells in a single layer cellular radio architecture, the principle criterion used is the quality of the signal received from the mobile station by the respective base stations capable of providing radio service. That is, the quality of the signal received from the mobile station by the base station currently serving the mobile is compared with the quality of signal received

~~This is the replacement sheet~~

Date:

13 DEC 1997

AMENDED SHEET

by a base station serving an adjacent cell and when the quality of signal in the latter exceeds the former, the mobile is handed off to the base station serving the adjacent cell. In addition, a signal quality
5 increment, known as an offset or hysteresis, is also applied to the signal quality difference value so that unless the signal quality in the adjacent base station is at least "x" amount greater than the presently serving base station, handoff does not occur. This
10 prevents oscillating handoffs due to signal quality perturbations in which the mobile is repeatedly handed back and forth between two adjacent base stations.

When conventional handoff techniques, based purely upon signal quality, are applied to the multiple layer
15 cellular architecture, the resulting service quality is often not optimal and in many cases totally inappropriate. This is because it is generally preferable to serve a mobile station with the lowest possible level of base station as a preferred service
20 provider primarily because of capacity reasons. That is, if sufficient signal quality exists from the microcell, it is preferred to serve the mobile from that cell rather than handing the mobile off to the umbrella cell which has fewer total channels available
25 for service than a plurality of adjacent microcells would have.

Because of the foregoing problems associated with the use of existing handoff algorithms within layered cellular architectures, it is desirable to introduce a
30 system of handoff algorithms which maximize the efficient utilization of channel availability within a multi-level cellular radio architecture. The system of the present invention provides such a technique.

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

SUMMARY OF THE INVENTION

In one aspect of the invention, a mobile station is served by the base station of the cell level which is the preferred service provider for that mobile as long as the signal quality is above a selected minimum value. Should the signal quality deteriorate below that selected minimum value, best server selection possibilities are evaluated on the same level and such possibilities are first exhausted before handoff is made to a cell on a lower preference level.

In another aspect of the present invention, handoff is performed of a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas. Categories of preference are assigned within each cell with respect to each other associated cell within the system as to which said cell's service area is either adjacent, contiguous, or overlapping. The signal strength of the radio signals providing communication between the mobile station and the base station serving each of the associated cells within the system is measured and compared to a preselected threshold value. Whether or not to handoff the mobile to a base station serving an associated cell is determined based upon whether the signal strength of the radio signal therefrom is greater than the threshold value and on the preference assigned to the associated cell.

In a still further aspect of the invention, best server selection is performed for a mobile station served on a first radio channel by a first base station serving a first cell and operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells having different service areas. Categories of preference are assigned

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

within each cell with respect to each other associated cell within the system as to which said cell's service area is either coextensive adjacent, contiguous, or overlapping. Each associated cell is assigned a category of preferred, equal preference or non-preferred based upon the size of its service area relative to that of the cell within which the assignment is made. Information on a second radio channel broadcast by a second base station serving a second associated cell is received and stored. The signal strength of the radio signals broadcast on the first and second radio channels, respectively, are measured. The preference category of the cell from which said second radio channel signal is received is determined. The second base station broadcasting the second radio channel is selected as the best server in response to any one of the following conditions, (a) the second cell having a preference category of preferred and the signal strength of the radio signal of said second radio channel being greater than a preselected value, (b) the second cell having a preference category of equal preference and the signal strength of the radio signal of the second radio channel being greater than the signal strength of the radio signal of the first radio channel, or (c) the second cell having a preference category of non-preferred and the signal strength of the first radio channel being less than a preselected value and the signal strength of the radio signal of the second radio channel being greater than that of the first radio channel.

In yet another aspect of the invention, server selection is performed for a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

cells. Each of the cells is provided with radio service by a base station the broadcast power of which and the resultant service area of which varies from larger to smaller. Each cell is provided with a list
5 of neighboring cells the service areas of which are proximately associated with the service area of the cell. A minimum acceptable radio channel signal strength value is assigned for each cell. The strength of the radio signals providing communication between
10 the mobile station and the base station is measured for the cell currently serving the mobile station as well for each of the neighboring cells thereof. A server is selected for the mobile station from among the currently serving cell and its neighboring cells by
15 choosing the cell having both the smallest service area and a radio signal strength which is at least equal to the minimum acceptable value.

BRIEF DESCRIPTION OF THE DRAWINGS

20 For a more complete understanding of the present invention and for further objects and advantages thereof, reference may now be had to the following description taken in conjunction with the accompanying drawings, in which:

25 FIG. 1 is a pictorial representation of a single level cellular radio communication system including a mobile switching center, a plurality of base stations and a plurality of mobile stations;

30 FIG. 2 is a pictorial representation of a multi-level cellular radio communication system illustrating a plurality of microcells and a plurality of overlying umbrella cells;

FIG. 3 is a graph illustrating received signal strength by a mobile station moving within a microcell

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET

and an overlying umbrella cell within which it is included;

FIG. 4 is a diagram of nominal minimum and maximum microcell sizes;

5 FIG. 5 is a graph illustrating received signal strength by a mobile station moving within a microcell and an overlying umbrella cell with different signal criteria than in FIG. 3;

10 FIG. 6 is a diagram illustrating three different handoff borders for a microcell and an overlying umbrella cell;

FIG. 7 is a block diagram illustrating a plurality of base stations located respectively within adjacent cells of a cellular radio system;

15 FIG. 8 is a block diagram of the infrastructure equipment within a cellular radio system;

FIG. 9 is a block diagram of a mobile radio transceiver for use within a cellular radio system; and

20 FIGS. 10-12b are flow charts illustrating procedures used in the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring first to FIG. 1, there is illustrated a conventional single layer cellular radio communication system of the type to which the present invention has a relationship. In FIG. 1, an arbitrary geographic area may be divided into a plurality of contiguous radio coverage areas, or cells C1-C10. While the system of FIG. 1 is illustratively shown to include only 10 cells, it should be clearly understood that in practice, the number of cells will be much larger.

Associated with and located within each of the cells C1-C10 is a base station designated as a corresponding one of a plurality of base stations B1-B10. Each of the base stations B1-B10 includes a

This is the replacement sheet

Date: 13 DEC 1997



transmitter, receiver, and base station controller as is well known in the art. In FIG. 1, the base stations B1-B10 are illustratively located at the center of each of the cells C1-C10, respectively, and are equipped with omni-directional antennas. However, in other configurations of a cellular radio system, the base stations B1-B10 may be located near the periphery, or otherwise away from the centers of the cells C1-C10 and may illuminate the cells C1-C10 with radio signals either omni-directionally or directionally. Therefore, the representation of the cellular radio system of FIG. 1 is for purposes of illustration of a single level cellular radio system only and is not intended as a limitation on the possible implementations of the cellular radio system within which the system of the present invention may find utility.

With continuing reference to FIG. 1, a plurality of mobile stations M1-M10 may be found within the cells C1-C10. Again, only 10 mobile stations are shown in FIG. 1 but it should be understood that the actual number of mobile stations will be much larger in practice and will invariably greatly exceed the number of base stations. Moreover, while none of the mobile stations M1-M10 will be found in some the cells C1-C10, the presence or absence of the mobile stations M1-M10 in any particular one of the cells C1-C10 should be understood to depend, in practice on the individual desires of the mobile stations M1-M10 who may roam from one location in the cell to another or from one cell to an adjacent cell or neighboring cell, and even from one cellular radio system served by an MSC to another system.

Each of the mobile stations M1-M10 is capable of initiating or receiving a telephone call via one or more of the base stations B1-B10 and a mobile switching

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

center (MSC). A mobile switching center (MSC) is connected by communication links, e.g., cables, to each of the illustrative base stations B1-B10 and to the fixed public switch telephone network (PSTN), not shown, or a similar fixed network which may include an integrated system digital network (ISDN) facility. The relevant connections between the mobile switching center (MSC) and the base stations B1-B10, or between the mobile switching center (MSC) and the PSTN or ISDN, are not completely shown in FIG. 1 but are well known to those of ordinary skill in the art. Similarly, it is also known to include more than one mobile switching center (MSC) in the cellular radio system and to connect each additional mobile switching center (MSC) to a different group of base stations and to other mobile switching centers (MSCs) via cable or radio links.

Each of the cells C1-C10 is allocated a plurality of voice or speech channels and at least one access or control channel, such as a forward control channel (FOCC). The control channel is used to control or supervise the operation of mobile stations by means of information transmitted to and received from those units. Such information may include incoming call signals, outgoing call signals, page signals, page response signals, location registration signals, voice channel assignments, and maintenance instructions as the mobile station travels out of the radio coverage of one cell and into the radio coverage of another cell. The control or voice channels may operate either in an analog or digital mode or a combination thereof.

FIG. 1 illustrates a relatively conventional single level cellular structure in which mobile stations are handed off from one cell to another by it being served with radio channels in communication with

This is the replacement sheet

13 DEC 1997

Date:

AMENDED SHEET

first one base station and then an adjacent base station based upon the signal level of the mobile station received from each of the respective base stations.

5 Referring next to FIG. 2, there is shown an illustrative multi-level layered cellular architecture in which a plurality of umbrella macrocells A-G, analogous to the cells C1-C10 of FIG. 1, overlies and include a plurality of microcells a-e located within
10 the same service area of one or more of the umbrella cells. In FIG. 2, each of the umbrella cells A-G would be served respectively by a base station, similar to the base stations B1-B10 of FIG. 1, and it would include a service area within a cell on the order of,
15 for example, several kilometers in diameter. Similarly, each of the microcells a-e would also be served by a base station (not shown) located within the cell and providing a respective service area on the order of a few hundred meters for each. Just as the
20 service areas of the umbrella cells A-G are adjacent, contiguous or overlapping to one another, so also are the service areas of the respective microcells a-d contiguous to one another, with the service area of microcell e being isolated from the other microcells
25 but coextensive within the service area of the umbrella cell A. Each of the base stations providing radio coverage for both the umbrella cells A-G and the microcells a-e could be operated under the control of a single MSC (not shown).

30 As shown in FIG. 2, a mobile station 21 moving along the path identified by arrow 22 would move from the region served by umbrella cell A through the regions served by microcell d and microcell c and into the coverage area of umbrella cell B. Providing radio
35 service to the mobile station 21 as it moves along the

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

path 22 could involve a number of different handoffs from different serving base stations at different points along the way depending upon the handoff criteria or handoff algorithm used to implement such handoffs. For example, at the beginning of its path, the mobile station 21 could only be provided with service by the base station serving the umbrella cell A, while at point 23 along the path 22 it could be served either by the base station of umbrella cell A or the base station of microcell d. In addition, when it reached point 24 on the path 22, it could be served either by the base station of umbrella cell A or the base station of microcell c. Further, at point 25, service could be provided by the base station of microcell c or the base station of umbrella cell B. Finally, at point 26 on path 22, the mobile station 21 could only be provided with service by the base station serving umbrella cell B. Thus, the decision criteria with respect to which cell the mobile station 21 should be handed off to and the criteria which should be used to determine both the timing and the result of that handoff are important considerations in configuring the efficiency and capacity of radio service to be provided to the mobile stations within the multi-layered cellular structure of FIG. 2.

As discussed above, in implementing the handoff process within a single layer cellular structure, a mobile station is only located in one cell at a time and leaves the old cell behind when it enters and begins receiving service by virtue of handoff to the new cell. In such case, the signal strength received from the mobile station decreases for the old cell and increases for the new cell when the handoff border is crossed by the mobile station. However, when a microcell is placed within an umbrella cell and is

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET

totally surrounded by the umbrella cell, there is an entirely different situation with respect to the variation in signal strength as the mobile moves through the microcell located within the umbrella cell.

5 For example, if the handoff border for a microcell on the reverse side from the umbrella cell is crossed, both the serving cell signal strength and the candidate cell signal strength are increasing or decreasing, depending upon the direction of movement of the mobile

10 station. This variation in signal strength becomes more and more of a problem the closer to the antenna site serving the umbrella cell site the microcell is located. These problems may be illustrated by two examples set forth below, both for digital radio

15 channels.

In the first example, assume that an umbrella cell has 50 watts erp (47dbm) and an enclosed microcell 0.1 watt erp (20dbm). The microcell is placed 200 meters from the base station site of the umbrella cell. 0.1

20 watts is an appropriate power level for a 200 meter diameter microcell. As shown in FIG. 3, there is illustrated the calculated signal strength received by a mobile station using the formula $L=30+35\log d$ as the path loss formula, with d being given in meters. In

25 addition, in an attempt to have an appropriate cell size, a signal offset value is set to 10db, i.e., 10db is subtracted from the measured umbrella cell signal strength before comparison to candidate cell signal strength in accordance with standard single level cell

30 architecture handoff algorithms. As illustrated, the signal strength of the signal received by a mobile station from the umbrella cell moving from the base station location of the umbrella cell toward and through the base station site of the microcell, begins

35 quite high and decreases exponentially as a function of

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

the distance between the mobile station and the umbrella cell base station. The signal strength received by the mobile station from the microcell increases exponentially until it passes through the
5 base station serving the microcell at 200 meters distance from the base station of the umbrella cell and then decreases exponentially thereafter as a similar function of the distance from the microcell base station.

10 Referring next to FIG. 4, there is shown the nominal handoff border with an offset value of 10db being applied when the signals are compared, meaning that the nominal handoff border is the line where the umbrella cell is 10db stronger than the microcell.
15 Adding a plus or minus 5db inaccuracy in the mobile assisted handoff (MAHO) measurement by the mobile station and a +/- 3db hysteresis, the maximum and minimum cell size is found where the umbrella cell is 18db and 2db stronger, which are shown by the inner and
20 outer line of FIG. 4, respectively. The lowest signal strength in the microcell is found to be around -97dbm. Such a case may work and might be acceptable in some cases, however, the uncertainty of the handoff borders is relatively high. Moreover, if some fading is
25 introduced into the consideration of signal level, such a technique is likely to become unacceptable from a practical standpoint. These uncertainties in handoff borders will be even worse if fading is added to the signal strengths. Without any offset at all, the cell
30 is much too small considering the ability to provide coverage with 20dbm output power.

A second example of the problems associated with using the conventional single layer handoff algorithm for a multi-layer cellular structure, may be
35 illustrated with the case of 200 meters between two

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

separate cell sites but with 30dbm for the micro cell. In this case, the difference was that the microcell had 30dbm output power. FIG. 5 is a graph showing the signal strength from the two cells at the different distances from the respective base station of the umbrella cell and the microcell as the mobile travels from the base station of the umbrella cell through the base station of the microcell and then away from both. While the overall structure of the respective signal level curves is similar to that shown in FIG. 3, the overlapping relationship is somewhat different. Moreover, if a nominal offset value is selected to be 17db, the nominal handoff border, i.e, the line where the umbrella signal strength is 17db higher than that of the microcell signal strength, is represented by the straight line in FIG. 6. As discussed above, inaccuracies in the mobile and hysteresis values are added giving borders at 9db and 25db offsets, respectively. In this case, the umbrella cell and the microcell are equivalent. In the worst case, the umbrella cell is the small one and in the best case the microcell is the small one. This example illustrates what can easily happen if the offset is set too high in an attempt to get a reasonable coverage.

The above two examples illustrate that there are cases where the existing locating function and handoff algorithm gives highly inappropriate results in the case of multi-level cellular structures. Attempts to address these inadequacies may include: (1) providing design rules to be followed by cellular system operators to avoid dangerous situations; and (2) modification of the locating algorithms to better handle the umbrella/microcell situation. The use of design rules is not an acceptable approach since rules must define restrictions on microcell power levels and

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

distances from the umbrella cell site. Such rules have to include a considerable margin of error in order to cover nominal situations and will be perceived as a limitation on the operation of the system. In addition, if the rules are not followed, either deliberately or accidentally, the system will be perceived to have a lower quality with degraded voice quality and more dropped calls leading to system complaints.

As pointed out above, the present algorithm used in the case of single level cellular structures functions adequately to use relative signal strength between current cell and neighboring cell in order to locate handoff borders when the cells are of equal preference and located side by side. Another criterion is needed for handoff between umbrella cells and microcells.

The system of the present invention provides handoff criterions based on absolute signal strength. That is, when the serving cell is the umbrella cell and the signal strength for a microcell neighbor, measured by the mobile station in digital cellular systems and by the signal strength receiver in analog cellular systems, is above a "sufficient" signal level, so as to ensure a good speech quality in the microcell, a handoff can be made to the microcell. This criterion ensures that a handoff to the microcell is performed whenever it can give service of sufficient quality.

A general approach inherent in the system of the present invention is to handle each of the cells as belonging to distinctly different layers, i.e., macrocells, microcells, pico cells, etc., without defining different layer types. In order to achieve, for example, three categories of neighboring cells: (1) neighbors beside, (2) neighbors above, and (3)

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

neighbors below, such a classification is useful. In such a definition, a "neighbor beside" will be an existing neighbor on the same level as the currently serving cell. Neighbors above for a microcell would be an umbrella cell and neighbors below for an umbrella cell would be microcells.

Under the present system, handoff should be accomplished to a neighbor below whenever the signal strength in that neighbor is above a new "sufficient" threshold value to be defined as a cell parameter. On the other hand, handoff to a neighbor above, for example, the umbrella cell, should only be done when the signal strength is below the same threshold provided that it is a better candidate. A hysteresis value will be applied to the threshold in order to avoid oscillating handoffs.

The modification of the handoff criteria employed in the application of the present invention to one exemplary implementation of a cellular radio system, the CMS 88 system of Ericsson Radio System, has an impact on both the exchange and the base station software in that in the exchange software handling of new cell parameters and neighbor type information must be added. Such new cell parameters and neighbor type information are sent by the exchange to the base station and, in the base station, these parameters must be added to the digital channel software as new criteria for sending handoff requests. In the case of analog channels, such corresponding software criteria must be located in the exchange itself.

To be more general, there are two different methods implied in best server selection in accordance with the present invention: (a) Analog, in which the signal strengths for each call are measured in the neighbor cells, and these together with the signal

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

strength for uplink in the serving channel are evaluated; and (b) Digital in which mobile assisted handoff (MAHO) is employed and similar measurements are made by the mobile and reported to the base station and evaluated.

5
10
15
20
A basic concept inherent in the present invention is that it is desirable to serve a mobile station by means of a cell level within a multi-cell structure which is at the lowest possible level provided the signal quality is sufficient to provide good service. In the situation shown in FIG. 2, including an array of umbrella cells and microcells positioned therein, and in which it possible to provide coverage from either the umbrella cell or the microcell, it is normally optimal to allow the microcell to handle the subscriber traffic whenever it is appropriate from the standpoint of quality transmission. In other words, in such situations the microcell, i.e., the lowest level of cells in the multi-cell array, is preferred. In the case where multi-cell levels are implemented, one layer is generally preferred over the other primarily for capacity reasons.

25
30
The system and method of the present invention is implemented based upon the processing of a list of neighbor cells and upon the differentiation between preferred cells, non-preferred cells and cells with equal preference in order to ascertain the most appropriate serving cell both at time of call setup as well as during the call itself. For example, as shown in FIG. 2, the microcells a, c, d, e are preferred to the umbrella cell A, microcells a, b, c are preferred to the umbrella cell B, while umbrella cells A-G have equal preference to each other and microcells a-e have equal preference to each other.

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

Within the present system, one goal is to ensure that the mobile subscriber radio transceiver is tuned to the most appropriate cell both during the idle mode as well as during the call process. Preferably, the
5 algorithm used in the present invention is employed to select a cell which is the same in both idle mode and during the process of a call in order to make sure that the cell as selected at call setup is also accepted immediately after the call setup.

10 In the present invention, data are assigned to each cell as set forth below in the chart.

<u>Parameter</u>	<u>Description</u>
1	A selected signal strength threshold which defines a sufficiently "acceptable" signal strength for the cell
15	
2	A hysteresis value to be used together with the assigned threshold
20	
3	A list of neighboring cells
4	For each neighbor, an assigned type, i.e., preferred, non-preferred, equal preference
25	
5	For each neighbor, an assigned hysteresis value
30	

In case there is no qualified preferred neighbor and the signal strengths in the currently serving cell is
35 below the threshold, then the "best" cell should be selected and handed off to. The hysteresis value of parameter 5 is used in this particular situation.

Referring briefly to FIG. 7, there is shown a plurality of neighboring cells 41-43 which may be at
40 any level within a multi-level cellular structure. Within each cell is a base station 44-46 each of which comprises a control channel transceiver 44a-46a as well

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

as a plurality of voice channel transceivers 44b-46b. The control channel of the base station is used for communication with mobile stations during idle period when no call has been established. The signalling placed on the control channel includes the information to be broadcast to the mobile stations relating to neighboring cells. The voice channels are used after call setup to a mobile station and carry not only voice data but also certain signalling, for example, measurement channel numbers for the neighboring cells to the cell serving the mobile station, as well as a handoff order to the mobile and measured signal strength from the neighboring cells to the cell serving the mobile station in the case of mobile assisted handoff (MAHO) under the IS-54 digital standard.

Referring now to FIG. 8, there is shown an overall block diagram of the equipment within the cellular network within which the present invention is incorporated, including the public switched telecommunication network (PSTN) 51, a mobile switching center (MSC) 52, and a pair of illustrative base stations 53-54. Within the MSC 52 is a switch 55 controlled by a central processor 56 both of which are connected to an interface 57. The interface 57 of the MSC 52 is coupled by means of data lines 61 and 62 to each of the respective base stations 53 and 54. Each base station includes a multiplexer/demultiplexer 60 connected to a plurality of transceivers 63-65 connected to an antenna 66. Each transceiver includes a control unit 67 and a transmit unit 68 along with a receive unit 69. Calls to or from subscribers in the PSTN 51 are connected to the switch 55 within the MSC 52 where they are routed to the correct cell and voice channel controlled by the central processor 56. The central processor 56 also administers and processes

This is the replacement sheet

AMENDED SHEET

Date:

13 DEC 1997

data regarding the location of the mobile, the neighboring cells to the cell within which the mobile is currently located, and controls both call setup and handoff. The links between the MSC 52 and the base stations 53 and 54 (links 61 and 62) carries voice data, as well as control information to and from the control unit 67 within each of the different transceivers 63-65 of the base stations 53 and 54. The base station equipment 53 and 54 consists of the multiplexer 60 which administrates distribution of voice data and control information to and from the different transceivers 63-65. The transceivers include both control channel transceivers and voice channel transceivers.

Referring next to FIG. 9, there is shown a mobile subscriber unit 71 including a receiver 72, a transmitter 73 connected to an antenna 74 through a duplexer 75. A control unit 76 is coupled to a synthesizer 77 which is also coupled to the transmitter 73 and receiver 72. A microphone 78 is connected to the transmitter 73 while a speaker 79 is connected to the receiver 72. The synthesizer 77 is used to tune the receiver 72 to the control channel frequencies before call setup and to different voice channel frequencies and measurement channel frequencies during the call and under control of the control unit 76. The control unit 76 measures by means of the receiver 72 and the synthesizer 77 the signal strength of the signal being received by the receiver 72, receives neighbor list information from the base station via the receiver 72 and processes all of the information according to the algorithm and technique of the present invention.

In the present system a mobile unit in idle mode searches the assigned frequency spectrum being

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

5 broadcast for an appropriate control channel for communication with the cellular network. All control channels are continuously transmitting and are cyclically broadcasting neighbor cell information which is valid for the cell within which the mobile is currently located. The neighbor cell information consists of the following data:

- 1) Control channel frequencies for the neighbor cells;
- 10 2) The type of neighbor, i.e.
 - (a) Preferred neighbor,
 - (b) Non-preferred neighbor, or
 - (c) Neighbor with equal preference;
- 15 3) For preferred neighbors, a signal strength threshold value for each. This threshold value is the threshold of sufficient signal strength in the neighbor cell plus a corresponding hysteresis or offset value, which may be calculated in the central processor in the MSC or in the control unit of the base station before
- 20 it is sent;
- 4) For each control channel (cell), a signal strength threshold which is the threshold for sufficient signal strength when served by the cell, i.e., preferred, cell but this time with the hysteresis
- 25 value subtracted from that value; and
- 5) For all neighbors (with equal preference and for non-preferred neighbors) a hysteresis value.

The mobile station measures the signal strength periodically for the current channel and at the frequencies defined for the current cell's neighbors.

30 The mobile then tunes to a preferred neighbor as soon as the measured signal strength for this neighbor is above the threshold set for this neighbor cell. If more than one preferred neighbor is qualified, the

35 mobile tunes to the neighbor with the best margin with

This is the replacement sheet

AMENDED SHEET

Date: 13 DEC 1997

respect to the threshold value. If, however, there is no qualified preferred neighbor cell and a neighbor cell with equal preference has a signal strength which is higher than the signal strength to the current channel with a margin which is defined by the hysteresis value for that particular neighbor, the mobile then retunes to this neighbor cell.

If the signal strength for the current channel is below its threshold defining sufficient signal strength and there is no qualified preferred neighbor and there is also no qualified neighbor with equal preference, and a non-preferred neighbor has a signal strength which is higher than the signal strength for the current channel with a margin also added which is defined by the hysteresis value for that particular neighbor cell, the mobile tunes to this neighbor cell's control channel frequency.

When a call setup from the mobile is attempted, the mobile is already on an appropriate control channel according to the procedure set forth above and the call can be set up in the corresponding cell according to the well-established procedures.

Another way to provide the mobile with the frequencies, the neighbor types, two signal strength levels, i.e., the threshold and the hysteresis, and another hysteresis would be to broadcast the threshold and the hysteresis separately and let the mobile calculate the two levels.

Another way to describe the algorithm is: (1) tune to a preferred neighbor when the measured signal strength is "good enough"; (2) do not tune to a non-preferred neighbor when the measured signal strength for the currently serving cell is "good enough"; and (3) tune to the best neighbor when the signal strength for the serving cell is not "good enough".

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

As an illustration of the above-referenced procedure, an example may be set forth with reference to FIG. 2. A mobile subscriber terminal moving from umbrella cell A to umbrella cell B will first be tuned to cell A's control channel frequency where it will receive broadcast information regarding control channel frequencies for neighboring cells B-G with equal preference as well as their hysteresis values together with the frequencies for the preferred neighbor microcells a, b, d, e and their corresponding threshold values. When the signal strength from microcell d is above the threshold value set for that cell, the mobile will retune to microcell d's control channel and receive information about microcell d's neighbor cells which are now microcell a and microcell c with equal preference, and umbrella cell A as a non-preferred neighbor cell. After having retuned to microcell c, the neighbors with equal preference will be microcell a, microcell b, and microcell d and the non-preferred neighbors will be umbrella cell A and umbrella cell B. Finally, when the mobile station has reached a location within umbrella cell B, it will have umbrella cells A, C and G as neighbors with equal preference and microcells a, b, c as preferred neighbors.

When a call is in progress within the system of the present invention and just after call setup and after handoff to a new cell, information about the control channel frequency or any other continuously transmitting frequency in each neighbor cell is sent to the mobile station. The mobile measures signal strength for the serving channel and the neighboring cells periodically and reports those values on the current voice channel to the base station. This information is processed in the control unit of the base station or in the central processor of the MSC

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET

according to precisely the same rules as was done in the mobile station during idle condition. As soon as a better serving base station is identified according to rules set forth above, a handoff is performed to this new serving base station. If the base station or the mobile station uses power regulation, the signal strength or the threshold must be adjusted in order to get a comparison result, as if the radio transmitter was using the maximum allowed power level in the cell.

5 The system of the present invention provides an easier and more natural way to control selection of a cell at call setup and at handoff. The system also provides a system for optimal cell selection within such a multi-layered cell structure.

10 Referring next to FIG. 10, there is shown a flow chart illustrating certain functional performance in the system of the present invention. FIG. 10 illustrates a process performed within the mobile during idle period as follows: the routine begins at 101 and moves to 102 at which it selects a first channel. Thereafter, the mobile moves to 103 where it receives and stores information broadcast on the selected channel. Next, at 104 the mobile station measures the signal strength for the neighboring cells and for the serving channel. Thereafter, at 105 the mobile selects a first channel for evaluation and moves to 106 where it is determined whether or not that channel comes from a preferred neighbor cell. If so, the system moves to 107 at which it is determined whether or not the signal strength for the neighbor cell is greater than a preselected threshold value plus the hysteresis, if any. If not, the system moves to 108 where it is determined whether or not the last neighbor has been evaluated. If, however, at 107, the signal strength for the neighbor cell is greater than

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

the threshold value plus the hysteresis, if any, the system moves to 109 and the mobile station retunes to this neighbor cell value and returns to 103 to receive and store information broadcast on this newly selected channel.

5 If, however, at 106 the channel being evaluated is determined to not be a preferred neighbor cell, the system moves to 110 where it is determined whether or not the neighbor cell is one with equal preference. If not, i.e., the cell is a non-preferred neighbor cell, the system moves to 111 at which it determines whether or not the serving channel signal strength is less than a preselected threshold value plus the hysteresis, if any. If not, it moves to 108 to determine if the last neighbor has been evaluated. If, at 111, it is determined that the serving channel signal strength is lower than the threshold value minus the hysteresis value, if any, the system moves to 112 where it is determined whether or not the neighbor cell's signal strength is greater than the serving channel's signal strength and, if not, moves to 108 and determines whether or not the last neighbor has been evaluated. If, at 112 the neighbor cell's signal strength is determined to be greater than the serving channel's signal strength, then the mobile station retunes to this neighbor cell at 109 and returns to 103 to receive and store information broadcast on this channel. Similarly, if it is determined at 110 that this neighbor cell is a cell of equal preference, the system moves directly to 112 to evaluate the signal strength of that cell. If, at 108, the system determines that the last neighbor has been evaluated, the system returns to 104 and measures the signal strength for the neighboring cells in the serving channel as set forth above. If, however, the last neighbor cell is

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

determined to have not been evaluated at 108, the system moves to 113 and selects the next neighbor for evaluation returning to 106 to determine the preference of that particular neighbor.

5 It can thus be seen in FIG. 10 that the mobile station during idle period is continually cycling through the reception of channel information and determining whether or not it is appropriate to be handed off to a cell and applying a preference to those
10 potential cells to which it may be handed off in accordance with the most efficient utilization of channel availability.

 It should be understood that the process described above relates to the implementation of the present
15 invention within a digital cellular system employing mobile assisted handoff (MAHO) such as that specified by the IS-54 standard promulgated by EIA/TIA. It should be clear that the invention could also be implemented within other digital or analog cellular
20 systems in which radio signal strength measurements are made by the base stations of the various associated cells.

 Referring next to FIG. 11, there is also shown an alternate procedure for the evaluation of handoff
25 likelihood in the mobile during an idle period. The routine begins at 121 where the mobile selects a first channel at 122 and moves to 123 where it receives and stores information broadcast on that selected channel. Thereafter, the system moves to 124 and measures signal
30 strength for the neighboring cells and serving channels thereof. Next, at 125 the system selects the first channel for evaluation and clears a candidate channel list. Thereafter, at 126 the system determines whether or not the selected channel is that of a preferred
35 neighbor and, if so, moves to 127 where the signal

This is the replacement sheet

Date: 13 DEC 1997



strength for the neighboring cell is evaluated to determine whether or not it is above a preselected threshold value plus the hysteresis, if any. If not, the system moves to 128 and it is determined whether or not the last neighbor has been evaluated. If, however, at 127, it has been determined that the signal strength for the neighboring cell was greater than the threshold value, the system moves to add this neighbor's cell to the candidate list at 129 and thereafter to decision 128 to evaluate whether or not the last neighbor has been evaluated. If, however, at 126 it is determined that the neighbor was not preferred, the system moves to 131 to determine whether or not the neighboring cell is one with equal preference. If not, i.e., it is a non-preferred neighbor, the system moves to 132 and determines whether or not the serving channel strength is less than a preselected threshold value minus the hysteresis, if any, and, if not, to decision 128 to determine if the last neighbor has been evaluated. If, however, at 132 the serving channel signal strength is determined to be less than a threshold value minus the hysteresis, if any, the system moves to 133 at which it is determined whether or not the neighbor cell signal strength is greater than the serving channel signal strength and, if not, to a decision as to whether or not the last neighbor has been evaluated at 128. If the neighbor cell signal strength is greater than the serving channel signal strength, the system moves to 129 and adds this neighbor to the candidate list. If, at 131 it is determined that the cell is a neighbor with equal preference, the system moves directly to decision 133 to determine if the neighboring cell signal strength is greater than the serving channel signal strength.

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET

If, at decision 128 it is determined that the last neighbor has not been evaluated, the system moves to 134 to select the next neighbor for evaluation and thereafter to decision 126 to begin that evaluation.

5 If the last neighbor has been evaluated at 128, the system moves to 135 and determines whether or not any candidates have been found. If not, the system returns to 124 and, if so, moves to 136 to sort the candidate list. Thereafter, the system moves to 137 and retunes

10 to the first candidate on the list followed by moving to 123 where it receives and stores the information broadcast on that selected channel.

As shown in FIG. 11, again the system engages in an orderly evaluation of possible channels and selects

15 a channel based upon criteria determined to provide maximum efficiency and channel utilization in a multi-layered cell structure.

Referring next to FIGS. 12a-12b, there is shown a routine which may be executable in the system by either

20 the mobile station and/or base station during an established call within an exemplary digital cellular system. The system begins at 151 by moving to 152 at which it transfers neighbor cell information from the base station to the mobile. Thereafter, at 153 the

25 system measures the signal strength for the neighboring cells and serving channels. Next, at 154 the system selects a first channel for evaluation and clears a candidate list. Thereafter, at 155 the system determines if the selected channel is from a preferred

30 neighbor cell and, if so, moves to 156 where it determines whether or not the signal strength for that neighbor cell is greater than the preselected threshold value plus the hysteresis, if any. If not, the system moves to 157 and determines if the last neighbor has

35 been evaluated. If, at 156 the signal strength of the

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET

neighboring cell is greater than the threshold value plus the hysteresis, if any, the system moves to 158 and adds this neighbor to the candidate list. If, at 155 the cell is determined not to be a preferred
5 neighbor, the system moves to 159 to determine if the neighboring cell is one with equal preference and, if not, to 161 to determine if the serving channel signal strength is less than the preselected value minus the hysteresis, if any. If not, the system moves to 157 to
10 determine if the last neighbor has been evaluated. However, if the signal strength is less than the preselected value at 161, the system moves to 162 where it is determined whether or not the neighboring cell signal strength is greater than a serving channel
15 signal strength plus the hysteresis, if any, and, if so, to 158 to add this neighbor to a candidate list or, if not, to 157 to determine if the last neighbor has been evaluated. If, at 159 it is determined that the neighboring cell is one with equal preference, the
20 system moves directly to 162 to determine if that neighboring cell signal strength is greater than the serving channel signal strength plus the hysteresis, if any.

If it is determined at 157 that the last neighbor
25 has not been evaluated, the system moves to 163 to select the next neighbor for evaluation and thereafter evaluates it beginning at step 155. If, at 157 it is determined that the last neighbor has been evaluated, the system moves to 164 to determine if candidates are
30 found and, if not, back to 153 to measure the signal strength for neighbors and the serving channels. If candidates are found at 164, the system moves to 165 to sort the candidate list and, thereafter to 166 to select a first candidate cell for a handoff attempt.
35 At 167, the system determines whether or not an idle

channel exists in the candidate cell and, if not, moves to 168 to determine if this is the last candidate and, if not, to 169 wherein it selects the next candidate cell for a handoff attempt. If the cell was the last candidate at 168, the system moves back to 153 to measure the signal strength for neighbors and serving channels. If the idle channel in the candidate cell exists, the system moves to 171 and hands off to this candidate cell and, thereafter, returns to 152 to transfer neighboring cell information to the mobile.

As can be seen, the system of the present invention utilizes algorithms which maximize the channel utilization from various cells within a multi-layered cell structure in a highly efficient manner.

As can be seen from the above description, the present invention allows a multi-layered cellular communication system to monitor channel signal strength in a plurality of cells on multiple levels and perform an evaluation in accordance with an algorithm which maximizes the channel availability within the multi-layered cellular structure.

It is believed that the operation and construction of the present invention will be apparent from the foregoing description and, while the method and apparatus shown and described has been characterized as being preferred, obvious changes and modifications may be made therein without departing from the spirit and scope of the invention as defined in the following claims.

This is the replacement sheet

13 DEC 1997

Date:

AMENDED SHEET



WHAT IS CLAIMED IS:

1. A method of performing server selection for a mobile station operating within a cellular radio system comprised of multiple levels of cells having different service areas, said method comprising the steps of:

5 assigning to each cell according to cell level a category of preference for selection with respect to each other associated cell within the system having either a coextensive, adjacent, contiguous, or overlapping service area;

10 assigning to each associated cell a preselected signal strength threshold;

measuring the signal strength of communications between the mobile station and each base station serving the associated cells;

15 comparing the measured signal strengths to the preselected thresholds for each of the associated cells; and

20 selecting for the mobile station as server a base station serving a candidate one of the associated cells based upon whether the measured signal strength to the candidate associated cell is greater than the preselected signal strength threshold assigned to said cell and whether the candidate associated cell has a higher category of preference than a currently serving cell.

25 2. A method of performing server selection as set forth in claim 1 in which the categories of preference assigned to each associated cell includes the categories of preferred, equal preference and non-preferred for selection.

This is the replacement sheet

Date: 13 DEC 1997





3. A method of performing server selection as set forth in claim 2 in which an associated cell is assigned a preferred category of preference if its service area is substantially smaller than that of the currently serving cell, an equal category of preference if its service area is substantially the same size as that of the currently serving cell, and a non-preferred category of preference if its service area is substantially larger than that of the currently serving cell.

4. A method of performing server selection as set forth in claim 2 in which said multiple levels of cells include macrocells, microcells and picocells.

5. A method of performing best server selection for a mobile station operating within a cellular radio system comprised of multiple levels of cells each having a specific service area, said method comprising the steps of:

assigning to each cell a category of preference with respect to each of the other cells within the system having either a coextensive, adjacent, contiguous, or overlapping service area, said categories of preference comprising a category of preferred, a category of equal preference or a category of non-preferred, said category assignment based upon the size of the cell's service area relative to that of other cells;

measuring the signal strength of communications between the mobile station and a first base station for a first cell currently selected as best server, and between the mobile station and a second base station for a second cell in the system;

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET



identifying the assigned category of preference for the second cell;

5 selecting the second base station as the best server in response to satisfaction of any one of the following conditions, (a) the second cell having a category of preference of preferred and the measured signal strength with the second base station being greater than a preselected signal strength threshold, or (b) the second cell having a category of preference
10 of equal preference and the measured signal strength with the second base station being greater than the measured signal strength with the first base station, or (c) the second cell having a category of preference of non-preferred and the measured signal strength with
15 the first base station being less than a preselected signal strength threshold and the measured signal strength with the second base station being greater than that with the first base station.

20 6. A method of performing best server selection as set forth in claim 5 in which a cell is assigned a preferred category of preference with respect to another cell if its service area is substantially smaller than that of the other cell, an equal category
25 of preference with respect to the other cell if its service area is substantially the same size as that of the other cell, and a non-preferred category of preference with respect to the other cell if its service area is substantially larger than that of the
30 other cell.

7. A method of performing best server selection as set forth in claim 5 further comprising the steps of:

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET



measuring the signal strength of communications between the mobile station and each of the base stations serving associated ones of the cells in the system having either a coextensive, adjacent,
5 contiguous, or overlapping service area;

identifying the assigned category of preference for each of the associated cells;

selecting as the base station best serving the mobile station that particular base station for one of
10 the associated cells satisfying any one of the following conditions, (a) the particular base station being in a cell having a category of preference of preferred and having a measured signal strength with the mobile station greater than a preselected signal
15 strength threshold, or (b) the particular base station being in a cell having a category of preference of equal preference and having a measured signal strength with the mobile station greater than the measured signal strength between the mobile station and the
20 first base station, or (c) the particular base station being in a cell having a category of preference of non-preferred and having a measured signal strength with the mobile station greater than the measured signal strength between the mobile station and the first base
25 station and wherein the measured signal strength between the mobile station and the first base station is less than a preselected signal strength threshold.

8. A method of performing best server selection
30 as set forth in claim 5 in which said multiple layers of cells include macrocells, microcells and picocells.

9. A system for performing server selection for a mobile station operating within a cellular radio
35 system comprised of multiple levels of cells having

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET



different service areas, each cell assigned according to cell level a category of preference for selection with respect to each other associated cell within the system having either a coextensive, adjacent,
5 contiguous, or overlapping service area, and for assigning to each associated cell a preselected signal strength threshold, said system comprising;

means for measuring the signal strength of communications between the mobile station and each base
10 station serving the associated cells;

means connected to the means for measuring for comparing the measured signal strengths to the preselected signal strength thresholds for the associated cells; and

15 means connected to the means for comparing for selecting for the mobile station as server a base station serving a candidate one of the associated cells based upon whether the measured signal strength to the candidate associated cell is greater than the
20 preselected signal strength threshold for said cell and whether the candidate associated cell has a higher category of preference than a currently serving cell.

10. A system for performing server selection as
25 set forth in claim 9 in which the categories of preference assigned to each associated cell includes the categories of preferred, equal preference and non-preferred for selection.

30 11. A system for performing server selection as set forth in claim 10 in which an associated cell is assigned a preferred category of preference if its service area is substantially smaller than that of the currently serving cell, an equal category of preference
35 if its service area is substantially the same size as

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET



that of the currently serving cell, and a non-preferred category of preference if its service area is substantially larger than that of the currently serving cell.

5

12. A system for performing server selection as set forth in claim 10 in which said multiple levels of cells include macrocells, microcells and picocells.

10

15

20

13. A system for performing best server selection for a mobile station operating within a cellular radio system comprised of multiple levels of cells each having a different service area, each cell assigned a category of preference with respect to each of the other cells within the system having either a coextensive, adjacent, contiguous, or overlapping service area, said categories of preference comprising a category of preferred, a category of equal preference or a category of non-preferred, said category assignment based upon the size of its service area relative to that of other cells, said system comprising;

25

30

35

means for measuring the signal strength of communications between the mobile station and a first base station for a first cell currently selected as best server, and between the mobile station and a second base station for a second cell in the system;

means connected to the means for measuring for identifying the assigned category of preference for the second cell;

means connected to the means for identifying for selecting the second base station as the best server in response to satisfaction of any one of the following conditions, (a) the second cell having a category of preference of preferred and the measured signal

This is the replacement sheet

AMENDED SHEET

Date:

13 DEC 1997



5 strength with the second base station being greater
than a preselected signal strength threshold, or (b)
the second cell having a category of preference of
equal preference and the measured signal strength with
10 the second base station being greater than the measured
signal strength with the first base station, or (c) the
second cell having a category of preference of non-
preferred and the measured signal strength with the
first base station being less than a preselected signal
15 strength threshold and the measured signal strength
with the second base station being greater than that
with the first base station.

14. A system for performing best server selection
15 as set forth in claim 13 in which a cell is assigned:
a preferred category of preference with respect to
another cell if its service area is substantially
smaller than that of the other cell, an equal category
of preference with respect to the other cell if its
20 service area is substantially the same as that of the
other cell, and a non-preferred category of preference
with respect to the other cell if its service area is
substantially larger than that of the other cell.

25 15. A system for performing best server selection
as set forth in claim 13 further comprising:

means for measuring the signal strength of
communications between the mobile station and each of
the base stations serving associated ones of the cells
30 in the system that are either coextensive, adjacent,
contiguous, or overlapping with the first cell;

means for identifying the assigned category of
preference for each of the associated cells; and

35 means for selecting as the base station best
serving the mobile station that particular base station

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET



for one of the associated cells satisfying any one of the following conditions, (a) the particular base station being in a cell having a category of preference of preferred and having a measured signal strength with the mobile station greater than a preselected signal strength threshold, or (b) the particular base station being in a cell having a category of preference of equal preference and having a measured signal strength with the mobile station greater than the measured signal strength between the mobile station and the first base station, or (c) the particular base station being in a cell having a category of preference of non-preferred and having a measured signal strength with the mobile station greater than the measured signal strength between the mobile station and the first base station and wherein the measured signal strength between the mobile station and the first base station is less than a preselected signal strength threshold.

16. A system for performing best server selection as set forth in claim 13 in which said multiple levels of cells include macrocells, microcells and picocells.

17. A cellular communications system including a plurality of cells arranged in multiple layers, comprising:

a base station for each of the plurality of cells, each base station assigned a category of preference for server selection with respect to each neighboring cell in the plurality of cells having either a coextensive, adjacent, contiguous, or overlapping service area, each base station further assigned a signal strength threshold for mobile station communications within the cell; and

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET



a plurality of mobile stations moving through the plurality of cells and communicating with the plurality of base stations, each mobile station comprising:

5 means for measuring the signal strength of communications between the mobile station and each of the base stations within communications range; and

10 processing means connected to the means for measuring for making a server selection determination for the mobile station based on a comparison of the measured signal strength of communications with each candidate base station to the assigned signal strength threshold for those candidate base stations in conjunction with a
15 comparison of the category of preference assigned to each candidate base station.

18. The cellular communications system as in claim 17 wherein the base station further includes
20 means for broadcasting in a communication to the mobile stations the assigned category of preference for server selection and assigned signal strength threshold for communications to the base station.

25 19. The cellular communications system as in claim 17 wherein the processing means for making the server selection determination operates to select a server when the mobile station is both camping-on to a base station in an idle operating mode and handing-off
30 between base stations in a call processing mode.

20. The cellular communications system as in claim 17 wherein the processing means of the mobile station further includes means for determining a server
35 selection change from a currently serving base station

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET



5 to the candidate base station if the measured signal strength exceeds the assigned signal strength threshold for the candidate base station and further if the candidate base station has a higher category of preference than the currently serving base station.

10 21. The cellular communications system as in claim 20 wherein the determination by the processing means of the server selection change is further based on a comparison of the measured signal strength of communications with the candidate base station to the measured signal strength of communications with the currently serving base station.

15 22. The cellular communications system as in claim 21 wherein the processing means of the mobile station further includes means for determining the server selection change from the currently serving base station to the candidate base station if the measured signal strength for the candidate base station exceeds the measured signal strength for the currently serving base station and further if the candidate base station has at least an equal category of preference to the currently serving base station.

25 23. The cellular communications system as in claim 21 wherein the processing means of the mobile station further includes means for determining the server selection change from the currently serving base station to the candidate base station, even if the candidate base station has a lower category of preference than the currently serving base station, if the measured signal strength for the currently serving base station is below the assigned signal strength threshold for the currently serving base station, and

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET



further if the measured signal strength for the candidate base station exceeds the measured signal strength for the currently serving base station.

- 5 24. In a cellular communications system including
a plurality of cells arranged in multiple layers,
wherein each cell includes a base station, and further
including a plurality of mobile stations moving through
the plurality of cells and communicating with the
10 plurality of base stations, wherein each base station
is assigned a category of preference for server
selection with respect to each neighboring cell in the
plurality of cells having either a coextensive,
adjacent, contiguous, or overlapping service area, and
15 each base station is assigned a signal strength
threshold for mobile station communications within the
cell, a method for determining mobile station server
selection of a base station, comprising the steps of:
 measuring the signal strength of communications
20 between each mobile station and each of the base
stations within communications range thereof;
 comparing the measured signal strength of
communications with each candidate base station to the
assigned signal strength threshold for that candidate
25 base station;
 comparing the category of preference for each
candidate base station to the category of preference
for the base stations currently serving each of the
mobile stations; and
30 responsive to the foregoing comparisons making the
mobile station server selection determination for each
mobile station.

25. The method as in claim 24 wherein the step of
35 making is performed to select a server when the mobile

This is the replacement sheet

Date:

13 DEC 1997





station is both camping-on to a base station in an idle operating mode and handing-off to a base station in a call processing mode.

5 26. The method as in claim 24 wherein the step of making includes the step of selecting as a server a candidate base station having a measured signal strength with the mobile station that exceeds its
10 signal strength threshold, and also having a category of preference that is higher than the category of preference for the currently serving base station.

15 27. The method as in claim 26 further including the step of comparing the measured signal strength of communications with the candidate base station to the measured signal strength of communications with the currently serving base station.

20 28. The method as in claim 27 wherein the step of making includes the step of selecting as a server the candidate base station having a measured signal strength with the mobile station that exceeds the measured signal strength for the currently serving base station, and also having a category of preference that
25 is at least equal to the category of preference for the currently serving base station.

30 29. The method as in claim 27 wherein the step of making includes the step of selecting as a server the candidate base station having a measured signal strength with the mobile station that exceeds the measured signal strength for the currently serving base station, even if the category of preference for that candidate base station is lower than the category of
35 preference for the currently serving base station, and

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET



also provided that the measured signal strength for the currently serving base station is below its signal strength threshold.

5 30. A cellular communications system including a plurality of cells, comprising:

 a base station for each of the plurality of cells, wherein each base station is assigned a category of preference for server selection with respect to each
10 neighboring cell in the plurality of cells having either a coextensive, adjacent, contiguous, or overlapping service area, and wherein each base station is further assigned a signal strength threshold for mobile station communications within the cell;

15 a plurality of mobile stations moving through the plurality of cells and communicating with the plurality of base stations;

 means for measuring the signal strength of communications between the mobile stations and base
20 stations;

 processing means connected to the means for measuring, said processing means executing a predetermined procedure for selecting a base station to serve each of the mobile stations, the selected base
25 station having both the highest assigned category of preference and a measured signal strength of mobile station communications that exceeds the assigned base station signal strength threshold, said predetermined procedure followed for each mobile station in selecting
30 the base station both for camping-on to a server during an idle operating mode and for handing-off between servers during a call processing mode.

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET



31. A method of performing server selection for a mobile station operating within a cellular radio system in a region in which radio channels are provided by cells having different service areas, said method comprising:

providing for the mobile station a list of neighboring cells;

assigning a threshold radio channel signal strength level which is acceptable for service of a mobile station in each of said neighboring cells;

assigning to each of said neighboring cells on said list a category of preference with respect to a currently serving cell;

measuring the strength of the radio signals providing communication between the mobile station and the base station of each of the neighboring cells; and

selecting as a server for the mobile station the base station of a neighboring cell on said list whose preference category is preferred with respect to the currently serving cell and whose measured strength of the radio signal providing communication therewith is greater than the assigned threshold radio channel signal strength level by a largest margin in comparison to other preferred neighboring cells.

32. A method of performing server selection as set forth in claim 31 in which the categories of preference assigned within each cell to each neighboring cell includes preferred, equal preference and non-preferred.

33. A method of performing server selection for a mobile station operating within a cellular radio system in a region in which radio channels are provided by multiple levels of cells, each of said cells being provided with radio service by a base station the broadcast power of which and the resultant service area which varies in size from larger for higher level cells to smaller for lower

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET



level cells, said method comprising:

providing for the mobile station a list of neighboring cells;

assigning a threshold radio channel signal strength value which is acceptable for service to a mobile station in each of said neighboring cells;

measuring the strength of the radio signals providing communication between the mobile station and the base station of each of the neighboring cells; and

selecting as a server for the mobile station from among the neighboring cells the cell having both the smallest relative service area size and a measured radio signal strength which is greater than the threshold radio channel signal strength by a largest margin in comparison to other smallest neighboring cells.

34. A method for control channel reselection in a cellular telephone system including a plurality of cells, the plurality of cells including, with respect to a given cell associated with a currently selected control channel, an identified plurality of neighboring cells each being assigned a signal strength threshold and a category of preference with respect to the given cell, comprising the steps of:

filtering the identified plurality of neighboring cells to determine candidate cells for control channel reselection which have a measured signal strength exceeding their assigned signal strength threshold and have a category of preference of preferred over the given cell; and

choosing for control channel reselection the candidate cell whose measured signal strength exceeds its assigned signal strength threshold by a best margin in comparison to other preferred neighboring cells.

35. The method of claim 34 wherein the plurality of cells form a multi-level layered cell structure.

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET



36. The method of claim 35 wherein the multi-level layered cell structure includes both umbrella cells and microcells, and

wherein a microcell has a category of preference of preferred with respect to an umbrella cell;

wherein an umbrella cell has a category of preference of non-preferred with respect to a microcell;

wherein a microcell has a category of preference of equally preferred with respect to another microcell; and

wherein an umbrella cell has a category of preference of equally preferred with respect to another umbrella cell.

37. The method of claim 34 wherein the step of filtering comprises the steps of:

making signal strength measurements on a control channel of each of the identified neighboring cells;

comparing the signal strength measurements to the assigned signal strength thresholds;

determining the category of preference for each of the identified neighboring cells; and

selecting as the candidate cells those neighboring cells having measured signal strengths exceeding the signal strength thresholds and having preferred categories of preference.

38. The method of claim 37 wherein the signal strength measurements are made by mobile stations operating within the cellular telephone system.

39. The method of claim 37 wherein the signal strength measurements are made by base stations operating within the cellular telephone system.

40. The method of claim 34 wherein the step of choosing comprises the steps of:

sorting the candidate cells by calculated margin

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET



between the measured signal strengths and assigned signal strength thresholds; and

selecting for control channel reselection the candidate cell with the best calculated margin.

41. The method of claim 34 wherein the signal strength threshold comprises the sum of a sufficient signal strength for communication in the neighboring cell plus an offset.

42. The method of claim 34 wherein if no neighbor cell with a preferred category of preference is capable of being chosen in control channel reselection by the steps of filtering and choosing, further including the steps of:

further filtering the identified plurality of neighboring cells to determine alternate candidate cells for control channel reselection which have a measured signal strength exceeding a measured signal strength for the given cell by a certain hysteresis and have a category of preference of other than non-preferred with respect to the given cell; and

further choosing for control channel reselection the alternate candidate cell whose measured signal strength exceeds the sum of the given cell measured signal strength and the certain hysteresis by a best margin in comparison to other neighboring cells.

43. The method of claim 42 wherein the step of further filtering comprises the steps of:

making signal strength measurements on a control channel of the given cell and each of the identified neighboring cells;

comparing the signal strength measurements for the neighboring cells to the sum of the signal strength measurement for the given cell plus the certain hysteresis;

determining the category of preference for each of the identified neighboring cells; and

This is the replacement sheet

Date:

3 DEC 1997

AMENDED SHEET



selecting as the alternate candidate cells those neighboring cells having measured signal strengths exceeding the sum of the given cell measured signal strength and certain hysteresis and having a category of preference other than non-preferred.

44. The method of claim 43 wherein the signal strength

measurements are made by mobile stations operating within the cellular telephone system.

45. The method of claim 43 wherein the signal strength measurements are made by base stations operating within the cellular telephone system.

46. The method of claim 42 wherein the step of further choosing comprises the steps of:

sorting the candidate cells by calculated margin between the candidate cell measured signal strengths and the given cell measured signal strength plus the certain hysteresis; and

selecting for control channel reselection the candidate cell with the best calculated margin.

47. The method of claim 34 wherein the steps of filtering and choosing are performed in connection with server selection during mobile station camp-on.

48. The method of claim 34 wherein the steps of filtering and choosing are performed in connection with server selection during mobile station handoff.


49. A method for filtering a plurality of neighboring cells to determine candidate cells for control channel reselection in a cellular telephone system, the plurality of neighboring cells each being assigned a signal strength

This is the replacement sheet

Date:

13 DEC 1997

AMENDED SHEET



threshold and a category of preference with respect to a given cell associated with a currently selected control channel, comprising the steps of:

measuring received signal strength with respect to each of the identified plurality of neighboring cells;

determining the category of preference with respect to each of the identified plurality of neighboring cells; and

identifying as candidate cells for control channel reselection those ones of the identified plurality of neighboring cells which have a measured received signal strength exceeding their assigned signal strength threshold and have a category of preference of preferred over the given cell.

50. The method as in claim 49 further including the steps of:

measuring received signal strength with respect to the given cell; and

identifying as alternate candidate cells for control channel reselection those ones of the identified plurality of neighboring cells which have a measured received signal strength exceeding the sum of the measured signal strength for the given cell plus a certain hysteresis and having a category of preference other than non-preferred with respect to the given cell.

This is the replacement sheet

Date: 10 3 DEC 1997

AMENDED SHEET

**BEST SERVER SELECTION IN LAYERED
CELLULAR RADIO SYSTEM**

ABSTRACT OF THE INVENTION

A multi-level layered cellular radio architecture serves mobile subscriber stations (21) moving within the system. Best server selection is performed for the mobile stations (21) by assigning within each cell (C1-C10) a preference value to each other one of the cells (C1-C10) with which is associated by proximity of service area. The strength of the radio signal received by the mobile station (21) from the serving cell (C1-C10) as well as the radio channels of associated cells (C1-C10) is measured. A decision as to the best serving cell (C1-C10) for the mobile station (21) is made based upon both the preference value of the associated cells (C1-C10) and the signal strength of their respective radio channels.

(Figure 2)

This is the replacement sheet

Date: 13 DEC 1997

AMENDED SHEET.
