

PANEL MEMBER MOUNTING STRUCTURE OF CURTAIN WALL

BACKGROUND OF THE INVENTIONField of the Invention

5 The present invention relates generally to a curtain wall. More specifically, the invention relates to a panel member mounting structure of a curtain wall forming an exterior wall of an architecture.

Description of the Related Art

10 As a curtain wall, there is known such construction that a frame body comprising a plurality of quadrangular frame sections is constructed by mullions and transoms, and that panel members such as glasses are mounted on respective quadrangular frame sections.

15 One of the structures for mounting the panel member on the quadrangular frame section is disclosed in Japanese Unexamined Patent Publication (Kokai) No. Hei 2-190548, where leg pieces of L-shaped gaskets are inserted into the exterior side portions of mullions and transoms,
20 and arm pieces of the L-shaped gaskets are pressed onto the exterior side surfaces of the panel members, thereby holding the panel members.

 Another structure is disclosed in Japanese Examined Patent Publication (Kokoku) No. Sho 53-46015,
25 where a gasket is so constructed that it has a pair of

mounting tongue pieces and a pair of panel receiving grooves, each of the panel receiving grooves being defined by a pair of seal lips, one of the seal lips being designed to be deformable toward the exterior side, and fixing strips are detachably provided for preventing the deformable seal lip from deforming toward the exterior side. After the gaskets are fitted to the exterior side portions of the mullions and the transoms, panel members are mounted by deforming the deformable seal lips toward the exterior side, and then, the fixing strips are fitted. Thus, the panel members are held by the gaskets.

In the former panel member mounting structure, the gaskets are installed while the panel member is being held within the quadrangular frame section. That is, work of holding the panel member within the quadrangular frame section is necessary when the gaskets are installed. Holding the panel member within the quadrangular frame section is in itself a cumbersome work. Therefore, the panel member mounting operation in this structure is quite cumbersome.

Further, in this structure, since each two gaskets vertically or horizontally adjacent to each other and serving to hold respective panel members are simply in contact with each other, rain water and so forth may

penetrate through the contact portion.

In the latter panel member mounting structure, since the panel members are mounted after the gaskets have been installed on the the mullions and the transoms, the panel member mounting operation is less cumbersome as far as it goes. However, in this structure, each gasket is formed to have a pair of panel member receiving grooves and is designed to hold a plurality of adjacent panel members, so that the gasket is rather large and heavy. The installation work of large and heavy gaskets is troublesome. Therefore, the panel member mounting operation in this structure is still cumbersome, too.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a panel member mounting structure of a curtain wall which can solve the problems set forth above.

More specifically, the object of the present invention is to provide a panel member mounting structure which facilitates the panel member mounting operation and ensures satisfactory sealing.

According to the present invention, a panel member mounting structure for a curtain wall comprises:

a frame body formed by a plurality of mullions and a plurality of transoms so as to comprise a plurality of quadrangular frame sections;

a plurality of quadrangular gaskets each formed by a pair of vertical gaskets and a pair of horizontal gaskets integrally connected in quadrangular configuration and each installed on the exterior side of mullions and transoms defining one of the quadrangular frame sections so as to hold a panel member to be mounted in that quadrangular frame section, each of the vertical and horizontal gaskets having a gasket main body and a mounting portion integrally formed with the gasket main body on the interior side thereof, the gasket main body having a panel member receiving groove defined by an interior side receiving piece and an exterior side holding piece integrally connected through a connecting piece and a hollow portion provided in the connecting area of the exterior side holding piece and the connecting piece and opening to the exterior side so as to make the exterior side holding piece deformable toward the exterior side; and

a plurality of zippers each having a pair of fitting projections integrally connected through a connecting plate and fitted between a pair of the hollow portions of horizontally adjacent vertical gaskets so as to joint and cover contact edges of the horizontally adjacent vertical gaskets and/or fitted between a pair of the hollow portions of vertically adjacent horizontal

gaskets so as to joint and cover contact edges of the vertically adjacent horizontal gaskets.

In a preferred embodiment, the mullion has a mullion body located on the interior side and a projecting plate integrally formed on the exterior side of the mullion body to project toward the exterior side, the projecting plate has a pair of left and right L-shaped plates in the vicinity of the exterior side end and a pair of left and right projecting pieces on the exterior side end, and the L-shaped plates and the projecting pieces cooperate to define a pair of vertically extending left and right hollow grooves each opening to the exterior side for receiving the mounting portion of the vertical gasket. An attachment having a gasket holding piece may be fitted between the mullion main body and the L-shaped plate.

On the other hand, the transom has a transom body located on the interior side, an upper and lower horizontal plates each integrally formed on the exterior side of the transom body to project toward the exterior side and a panel member supporting plate integrally extending from the exterior side end of the lower horizontal plate toward the exterior side, the lower horizontal plate has a pair of upper and lower L-shaped plates in the vicinity of the exterior side end and a

pair of upper and lower projecting pieces on the exterior side end, and the L-shaped plates and the projecting pieces cooperate to define a pair of horizontally extending upper and lower hollow grooves each opening to the exterior side for receiving the mounting portion of the horizontal gasket. An attachment having a gasket holding piece may be fitted between the upper horizontal plate and the upper L-shaped plate and/or between the transom body and the lower L-shaped plate.

10 In another preferred embodiment, the mullion has a mullion body located on the interior side and a pair of projecting plates integrally formed on the exterior side of the mullion body to project toward the exterior side, a gasket supporting plate having a pair of left and right projecting pieces is integrally formed with the mullion to project toward the exterior side, a pair of gasket holders each having a gasket holding piece are connected to the mullion, and the projecting pieces and the gasket holders cooperate to define a pair of vertically extending left and right hollow grooves each opening to the exterior side for receiving the mounting portion of the vertical gasket. An attachment may be fitted between the mullion body and the gasket holder.

On the other hand, the transom has a transom body located on the interior side and an upper and lower

horizontal plates each integrally formed on the exterior side of the transom body to project toward the exterior side, a panel member supporting plate having a pair of upper and lower projecting pieces is integrally formed with the transom to project toward the exterior side, a pair of gasket holders each having a gasket holding piece are connected to the transom, and the projecting pieces and the gasket holders cooperate to define a pair of horizontally extending upper and lower hollow grooves each opening to the exterior side for receiving the mounting portion of the horizontal gasket. An attachment may be fitted between the transom body and the gasket holder.

Preferably, the vertical gasket has a pair of grooves formed between the mounting portion and the interior side receiving piece of the gasket main body, and the projecting piece and the gasket holding piece are inserted into the grooves respectively. Similarly, it is preferable that the horizontal gasket has a pair of grooves formed between the mounting portion and the interior side receiving piece of the gasket main body, and that the projecting piece and the gasket holding piece are inserted into the grooves respectively.

The zipper may be formed in cross configuration to be fitted at a joint point of four quadrangular frame

sections and to integrally joint and cover contact edges of a pair of vertical gaskets extending upwardly from the joint point, a pair of vertical gaskets extending downwardly from the joint point, a pair of horizontal gaskets extending to the left from the joint point and a pair of horizontal gaskets extending to the right from the joint point. Alternatively, the zipper may be so formed as to extend vertically beyond at least one quadrangular frame section and to joint and cover contact edges of vertically adjacent pairs of vertical gaskets continuously, or to extend horizontally beyond at least one quadrangular frame section and to joint and cover contact edges of horizontally adjacent pairs of horizontal gaskets continuously.

Preferably, wet type seal member is filled between the interior side surface of the panel member and the exterior side surface of the attachment.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood more fully from the detailed description given herebelow and from the accompanying drawings of the preferred embodiments of the invention, which, however, should not be taken to be limitative to the present invention, but are for explanation and understanding only.

In the drawings:

Fig. 1 is a partial front elevation showing an embodiment of a curtain wall according to the present invention;

Fig. 2 is a horizontal section of the embodiment of Fig. 1;

Fig. 3 is a vertical section of the embodiment of Fig. 1;

Fig. 4 is a front elevation of a connecting portion of a mullion and a transom;

Fig. 5 is a horizontal section of a second embodiment of a curtain wall at the portion of a mullion; and

Fig. 6 is a vertical section of the second embodiment of a curtain wall at the portion of a transom.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention will be discussed hereinafter in detail according to the preferred embodiments of the invention with reference to the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be obvious, however, to those skilled in the art that the present invention may be practiced without these specific details. On the other hand, well-known structures are not shown in detail in order to

unnecessarily obscure the present invention.

As shown in Fig. 1, a plurality of mullions 1 are arranged in the face direction having a distance between each other, and a plurality of transoms 2 are connected to the mullions 1, so that a frame body 4 comprising a plurality of quadrangular frame sections 3 is formed. The mullions 1 are connected to a body of an architecture (not shown) by means of fasteners.

Within each quadrangular frame section 3, a panel member 5 is mounted by means of a quadrangular gasket 6. The quadrangular gasket 6 is constituted of left and right vertical gaskets 7 to be installed on respective mullions 1 to extend between the transoms 2 and upper and lower horizontal gaskets 8 to be installed on respective transoms 2. The vertical gaskets 7 and the horizontal gaskets 8 are connected to each other through welding or so forth to form the integrated quadrangular gasket 6.

As shown in Fig. 2, each mullion 1 has a mullion body 10 located on the interior side and a projecting plate 11 integrally formed at the horizontally middle portion of the exterior side surface of the mullion body 10 and projecting toward the exterior side. The projecting plate 11 has a pair of vertically extending left and right L-shaped plates 12, 12

integrally formed in the vicinity of the exterior side end of the projecting plate 11 and a pair of vertically extending left and right projecting pieces 13, 13 integrally formed on the exterior side end of the projecting plate 11. The L-shaped plates 12, 12 and the projecting pieces 13, 13 cooperate to define a pair of vertically extending left and right hollow grooves 14, 14 each opening to the exterior side. The mullion body 10 has a pair of engaging pieces 15, 15 integrally formed on left and right side ends of the exterior side surface of the mullion body 10, and a pair of mullion attachments 16, 16 are fitted between the engaging piece 15 and the L-shaped plate 12, respectively. Each mullion attachment 16 has a gasket holding piece 17 integrally formed on the exterior side end of the mullion attachment 16 and facing the projecting piece 13. Thus, each mullion attachment 16 also serves as a gasket holder.

As shown in Fig. 3, each transom 2 has a transom body 20 located on the interior side, an upper horizontal plate 21 and a lower horizontal plate 22 each integrally formed on the exterior side of the transom body 20, and a panel member supporting plate 23 integrally extending from the exterior side end of the lower horizontal plate 22 toward the exterior side. The lower horizontal plate 22 has a pair of horizontally

extending upper and lower L-shaped plates 24, 24
integrally formed in the vicinity of the exterior side end
of the lower horizontal plate 22 and a pair of
horizontally extending upper and lower projecting pieces
5 25, 25 integrally formed on the exterior side end of the
lower horizontal plate 22. The L-shaped plates 24, 24
and the projecting pieces 25, 25 cooperate to define a
pair of horizontally extending upper and lower hollow
grooves 26, 26 each opening to the exterior side. The
10 upper L-shaped plate 24 is integrally connected to the
upper horizontal plate 21.

The upper horizontal plate 21 has a hollowed
portion 21a, and an upper transom attachment 27 is fitted
between the hollowed portion 21a and the upper L-shaped
15 plate 24. The upper transom attachment 27 has a gasket
holding piece 28 integrally formed on the exterior side
end of the upper transom attachment 27 and facing the
upper projecting piece 25. Thus, the upper transom
attachment 27 also serves as a gasket holder.

20 Between the exterior side lower portion of the
transom body 20 and the lower L-shaped plate 24 is fitted
a lower transom attachment 29. The lower transom
attachment 29 has a gasket holding piece 30 integrally
formed on the exterior side end of the lower transom
25 attachment 29 and facing the lower projecting piece 25.

Thus, the lower transom attachment 29 also serves as a gasket holder.

The transom 2 is put onto and connected to the mullion 1 by means of a L-shaped transom bracket 31.

5 That is, a vertical piece 32 of the transom bracket 31 is rigidly connected to the projecting plate 11 of the mullion 1 by means of a bolt and nut 33, while a horizontal piece 34 of the transom bracket 31 is rigidly connected to the lower horizontal plate 22 of the
10 transom 2 by means of a bolt and nut 35.

As shown in Fig. 4, parts of the L-shaped plate 12 of the mullion 1 are cut out so that the vertically extending hollow groove 14 of the mullion 1 is connected to the horizontally extending hollow groove 26 of the
15 transom 2.

As shown in Fig. 2, the vertical gasket 7 has a gasket main body 44 and a mounting portion 45. The gasket main body 44 has a panel member receiving hollow groove 43 defined by an interior side receiving piece 40 and an exterior side holding piece 41 integrally
20 connected through an intermediate connecting piece 42. The mounting portion 45 is integrally formed with the interior side receiving piece 40 of the gasket main body 44. A pair of grooves 46, 46 are formed between the
25 mounting portion 45 and the interior side receiving piece

40 of the gasket main body 44. In the connecting area of the exterior side holding piece 41 and the connecting piece 42, a hollow portion 47 opening to the exterior side is formed through the entire vertical length of the vertical gasket 7, which makes the exterior side holding piece 41 deformable toward the exterior side.

The vertical gasket 7 is installed on the mullion 1 by fitting the mounting portion 45 in the vertically extending hollow groove 14, and inserting the projecting piece 13 and the gasket holding piece 17 into the grooves 46, respectively. The vertical gasket 7 thus installed will never come off the hollow groove 14 even when large force acts on the vertical gasket 7.

The vertical edge portion of the panel member 5 is pressed and held by the interior side receiving piece 40 and the exterior side holding piece 41. Further, a zipper 48 is fitted in the hollow portions 47, 47 of a pair of horizontally adjacent vertical gaskets 7, 7. The zipper 48 serves to prevent the exterior side holding pieces 41, 41 of the horizontally adjacent vertical gaskets 7, 7 from deforming toward the exterior side, and at the same time joints the horizontally adjacent vertical gaskets 7, 7. Since the joint portion of the horizontally adjacent vertical gaskets 7, 7 is covered with the zipper 48, the penetration of rain water

and so forth is effectively prevented.

Specifically, the zipper 48 is formed with a pair of fitting projections 49, 49 integrally connected through a connecting plate 50, and the pair of fitting
5 projections 49, 49 are fitted in the hollow portions 47, 47 of the horizontally adjacent vertical gaskets 7, 7.

As shown in Fig. 3, the horizontal gasket 8 has nearly the same cross-sectional configuration as the vertical gasket 7, except that a hollow portion 42a is
10 cut out for accommodating the panel member supporting plate 23. The connecting piece 42 of the upper horizontal gasket 8 lies on the panel member supporting plate 23 so that the weight of the panel member 5 is borne by the transom 2. A pair of vertically adjacent
15 horizontal gaskets 8, 8 are pressed to each other in the vicinity of the exterior side ends.

As shown in Fig. 1, the zipper 48 may be formed in cross configuration to be fitted at a joint point of four quadrangular frame sections 3 and to integrally
20 joint and cover contact edges of a pair of vertical gaskets 7, 7 extending upwardly from the joint point, a pair of vertical gaskets 7, 7 extending downwardly from the joint point, a pair of horizontal gaskets 8, 8 extending to the left from the joint point and a pair of
25 horizontal gaskets 8, 8 extending to the right from the

joint point. In this configuration, since a zipper to be fitted to an upper pair of vertical gaskets and a zipper to be fitted to a lower pair of vertical gaskets are integrally connected to each other and a zipper to be fitted to a lefthand pair of horizontal gaskets and a zipper to be fitted to a righthand pair of horizontal gaskets are integrally connected to each other, gaps remaining between the gaskets around the joint point are closed and watertightness is enhanced.

Alternatively, the zipper 48 may be so formed as to extend vertically beyond at least one quadrangular frame section 3 and to joint and cover contact edges of vertically adjacent pairs of vertical gaskets 7, 7 continuously, or to extend horizontally beyond at least one quadrangular frame section 3 and to joint and cover contact edges of horizontally adjacent pairs of horizontal gaskets 8, 8 continuously. The same effect can be attained in this configuration.

Between the interior side surface of the panel member 5 and the exterior side surface of each of the mullion attachment 16 and the upper and lower transom attachments 27 and 29, wet type seal member 57 is filled. Therefore, even if the panel member 5 has been displaced relative to the quadrangular frame section 3 due to deformation of the frame body 4, the panel member 5 can

smoothly return to the original position when the frame body 4 recovers from deformation.

Next, the panel mounting steps will be explained.

5 First, the mullions 1 are connected to a body of an architecture, and the transoms 2 are connected between the mullions 1 to form a frame body 4 comprising a plurality of quadrangular frame sections 3.

10 The left and right vertical gaskets 7 and the upper and lower horizontal gaskets 8 are in advance connected to each other to form an integrated quadrangular gasket 6 in a factory or so forth. Thus integrated quadrangular gasket 6 is installed on the quadrangular frame section 3 by fitting the vertical
15 gaskets 7 in the hollow grooves 14 of the left and right mullions 1 and the horizontal gaskets 8 in the hollow grooves 26 of the upper and lower transoms 2. Then, the mullion attachments 16 and the upper and lower transom attachments 27 and 29 are fitted so as to hold the
20 vertical and horizontal gaskets 7 and 8 and to prevent them from falling off.

Next, the panel member 5 is installed in the panel member receiving grooves 43 by deforming the exterior side holding pieces 41 of the vertical and
25 horizontal gaskets 7 and 8 toward the exterior side. In

this condition, the panel member 5 is temporarily being held by the interior side receiving piece 40 and the exterior side holding piece 41. Then, in this condition, the zippers 48 are fitted to the gaskets so as to fix the panel member 5. Lastly, the wet type seal 57 is applied.

Alternatively, it is also possible to first fit the vertical and horizontal gaskets 7, 8 to the panel member 5 continuously around its quadrangular entire periphery to make, as it were, a mounting unit, and then to install such mounting unit in the quadrangular frame section 3 by fitting the vertical gaskets 7 in the hollow grooves 14 of the mullions 1 and the horizontal gaskets 8 in the hollow grooves 26 of the transoms 2.

Figs. 5 and 6 show a second embodiment of the panel mounting structure according to the invention, where the gasket holding piece is provided separately from the mullion attachment and the transom attachment.

As shown in Figs. 5 and 6, a gasket holder 54 comprises a gasket holding piece 51, a L-shaped piece 52 and a mounting piece 53. The mounting piece 53 is rigidly secured onto the mullion 1 by means of fastening bolt 55. The projecting pieces 13 of the mullion 1 and the gasket holder 54 cooperate to define a hollow groove 14.

In the shown construction, a gasket supporting

plate 56 is integrally formed with the mullion 1 to project toward the exterior side, and the connecting piece 42 of the vertical gasket 7 has a hollow portion 42a cut out on the interior side thereof for accomodating the gasket supporting plate 56.

Further, in this construction, a pair of projecting plates 11, 11 are integrally formed with the mullion body 10, and the L-shaped plates 12 are formed to be bent toward the interior side so as to be engaged with the L-shaped piece 52 of the gasket holder 54.

As set forth above, according to the present invention, each panel member is supported by a quadrangular gasket fitted around the entire periphery of the panel member, independently of other panel members. First, the quadrangular gasket is fitted to the mullions and transoms, and then the panel member is fitted in the quadrangular gasket by deforming the exterior side holding pieces of the vertical and horizontal gaskets toward the exterior side, or alternatively, the quadrangular gasket is first fitted around the entire periphery of the panel member, and then the panel member having the quadrangular gasket fitted around the periphery is mounted onto the mullions and transoms. In each case, at this stage of mounting process, the panel member is temporarily being held by the interior side

receiving pieces and exterior side holding pieces of the vertical and horizontal gaskets. And then, in this condition, the zippers are fitted to the gaskets. Therefore, installation operation of the quadrangular gasket as well as fitting operation of the zippers can be performed easily, especially because the latter is performed in the condition that the panel member is temporarily held. Thus, the present invention considerably facilitates the panel mounting operation as a whole.

Further, since the horizontally adjacent vertical gaskets are jointed by the zipper and the vertically adjacent horizontal gaskets are also jointed by the zipper, penetration of rain water and so forth through between the vertical gaskets and between the horizontal gaskets is prevented, and in addition, displacement of the vertical gaskets between or independent of each other as well as displacement of the horizontal gaskets between or independent of each other are prevented so that the panel member is supported firmly.

Although the invention has been illustrated and described with respect to exemplary embodiments thereof, it should be understood by those skilled in the art that the foregoing and various other changes, omissions and

additions may be made therein and thereto, without departing from the spirit and scope of the present invention. Therefore, the present invention should not be understood as limited to the specific embodiments set
5 forth above.

WHAT IS CLAIMED IS:

1. A panel member mounting structure for a curtain wall comprising:
- a frame body (4) formed by a plurality of mullions (1) and a plurality of transoms (2) so as to comprise a plurality of quadrangular frame sections (3);
- a plurality of quadrangular gaskets (6) each formed by a pair of vertical gaskets (7) and a pair of horizontal gaskets (8) integrally connected in quadrangular configuration and each installed on the exterior side of mullions (1) and transoms (2) defining one of said quadrangular frame sections (3) so as to hold a panel member (5) to be mounted in said one of said quadrangular frame sections (3), each of said vertical and horizontal gaskets (7, 8) having a gasket main body (44) and a mounting portion (45) integrally formed with said gasket main body (44) on the interior side thereof, said gasket main body (44) having a panel member receiving groove (43) defined by an interior side receiving piece (40) and an exterior side holding piece (41) integrally connected through a connecting piece (42) and a hollow portion (47) provided in the connecting area of said exterior side holding piece (41) and said connecting piece (42) and opening to the exterior side so as to make said exterior side holding piece (41)



deformable toward the exterior side; and

5 a plurality of zippers (48) each having a pair
of fitting projections (49) integrally connected through
a connecting plate (50) and fitted between a pair of said
hollow portions (47) of horizontally adjacent vertical
gaskets (7) so as to joint and cover contact edges of
said horizontally adjacent vertical gaskets (7) and/or
fitted between a pair of said hollow portions (47) of
vertically adjacent horizontal gaskets (8) so as to joint
10 and cover contact edges of said vertically adjacent
horizontal gaskets (8).

2. A panel member mounting structure as set forth
in claim 1, wherein said mullion (1) has a mullion body
15 (10) located on the interior side and a projecting plate
(11) integrally formed on the exterior side of said
mullion body (10) to project toward the exterior side,
said projectin plate (11) has a pair of left and right L-
shaped plates (12) in the vicinity of the exterior side
20 end and a pair of projecting pieces (13) on the exterior
side end, and said L-shaped plates (12) and said
projecting pieces (13) cooperate to define a pair of
vertically extending left and right hollow grooves (14)
each opening to the exterior side for receiving said
25 mouniting portion (45) of said vertical gasket (7).



- 24 -

3. A panel member mounting structure as set forth in claim 2, wherein an attachment (16) having a gasket holding piece (17) is fitted between said mullion main body (10) and said L-shaped plate (12).

5

4. A panel member mounting structure as set forth in claim 1, wherein said transom (2) has a transom body (20) located on the interior side, an upper and lower horizontal plates (21, 22) each integrally formed on the exterior side of said transom body (20) to project toward the exterior side and a panel member supporting plate (23) integrally extending from the exterior side end of said lower horizontal plate (22) toward the exterior side, said lower horizontal plate (22) has a pair of upper and lower L-shaped plates (24) in the vicinity of the exterior side end and a pair of upper and lower projecting pieces (25) on the exterior side end, and said L-shaped plates (24) and said projecting pieces (25) cooperate to define a pair of horizontally extending upper and lower hollow grooves (26) each opening to the exterior side for receiving said mounting portion (45) of said horizontal gasket (8).

5. A panel member mounting structure as set forth in claim 4, wherein an attachment (27; 29) having a

25



THIS SHEET HAS BEEN
REPLACED

- 25 -

gasket holding piece (28; 30) is fitted between said upper horizontal plate (21) and said upper L-shaped plate (24) and/or between said transom body (20) and said lower L-shaped plate (24).

5

6. A panel member mounting structure as set forth in claim 1, wherein said mullion (1) has a mullion body (10) located on the interior side and a pair of projecting plates (11) integrally formed on the exterior side of said mullion body (10) to project toward the exterior side, a gasket supporting plate (56) having a pair of left and right projecting pieces (13) is integrally formed with said mullion (1) to project toward the exterior side, a pair of gasket holders (54) each having a gasket holding piece (51) are connected to said mullion (1), and said projecting pieces (13) and said gasket holders (54) cooperate to define a pair of vertically extending left and right hollow grooves (14) each opening to the exterior side for receiving said mounting portion (45) of said vertical gasket (7).

20

7. A panel member mounting structure as set forth in claim 6, wherein an attachment (16) is fitted between said mullion body (10) and said gasket holder (54).

25

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

- 26 -

8. A panel member mounting structure as set forth in claim 1, wherein said transom (2) has a transom body (20) located on the interior side and an upper and lower horizontal plates (21, 22) each integrally formed on the exterior side of said transom body (20) to project toward the exterior side, a panel member supporting plate (23) having a pair of upper and lower projecting pieces (25) is integrally formed with said transom (2) to project toward the exterior side, a pair of gasket holders (54) each having a gasket holding piece (51) are connected to said transom (2), and said projecting pieces (25) and said gasket holders (54) cooperate to define a pair of horizontally extending upper and lower hollow grooves (26) each opening to the exterior side for receiving said mounting portion (45) of said horizontal gasket (8).

9. A panel member mounting structure as set forth in claim 8, wherein an attachment (29) is fitted between said transom body (20) and said gasket holder (54).

10 A panel member mounting structure as set forth in claim 3 or 6, wherein said vertical gasket (7) has a pair of grooves (46) formed between said mounting portion (45) and said interior side receiving piece (40) of said gasket main body (44), and said projecting piece (13) and

This Sheet Has Been Replaced





- 27 -

said gasket holding piece (17; 51) are inserted into said grooves (46) respectively.

11. A panel member mounting structure as set forth
5 in claim 5 or 8, wherein said horizontal gasket (8) has
a pair of grooves (46) formed between said mounting
portion (45) and said interior side receiving piece (40)
of said gasket main body (44), and said projecting piece
(25) and said gasket holding piece (28; 30; 51) are
10 inserted into said grooves (46) respectively.

12. A panel member mounting structure as set forth
in claim 1, wherein said plurality of zippers (48)
comprises zippers of cross configuration each fitted at
15 a joint point of four quadrangular frame sections (3) and
integrally jointing and covering contact edges of a pair
of vertical gaskets (7) extending upwardly from said
joint point, a pair of vertical gaskets (7) extending
downwardly from said joint point, a pair of horizontal
20 gaskets (8) extending to the left from said joint point
and a pair of horizontal gaskets (8) extending to the
right from said joint point.

13. A panel member mounting structure as set forth
25 in claim 1, wherein said plurality of zippers (48)



- 28 -

comprises zippers each extending vertically beyond at least one quadrangular frame section (3) and jointing and covering contact edges of vertically adjacent pairs of vertical gaskets (7) continuously.

5

14. A panel member mounting structure as set forth in claim 1, wherein said plurality of zippers (48) comprises zippers each extending horizontally beyond at least one quadrangular frame section (3) and jointing and covering contact edges of horizontally adjacent pairs of horizontal gaskets (8) continuously.

10

15. A panel member mounting structure as set forth in claim 3, 5, 7 or 9, wherein wet type seal member (57) is filled between the interior side surface of said panel member (5) and the exterior side surface of said attachment (16; 27; 29).

15

16. A panel member mounting structure as set forth in claim 1, wherein said quadrangular gasket (6) has a stiffness sufficient for temporarily supporting said panel member (5) on said quadrangular frame section (3) before said zipper (48) is fitted.

20

ABSTRACT OF THE DISCLOSURE

A panel member mounting structure for a curtain wall has a frame body comprising a plurality of quadrangular frame sections defined by a plurality of mullions and a plurality of transoms. For each quadrangular frame section, a quadrangular gasket constituted of left and right vertical gaskets and upper and lower horizontal gaskets is applied. Each of the vertical and horizontal gaskets has a gasket main body and a mounting portion integrally formed with the gasket main body. The gasket main body has a panel member receiving groove defined by an interior side receiving piece and an exterior side holding piece integrally connected through a connecting piece and a hollow portion provided in the connecting area of the exterior side holding piece and the connecting piece and opening to the exterior side so as to make the exterior side holding piece deformable toward the exterior side. Zippers each having a pair of fitting projections integrally connected through a connecting plate are fitted between a pair of the hollow portions of horizontally adjacent vertical gaskets so as to joint and cover contact edges of the horizontally adjacent vertical gaskets and between a pair of the hollow portions of vertically adjacent horizontal gaskets so as to joint and cover contact edges of the



vertically adjacent horizontal gaskets.

In the panel member mounting operation, first the quadrangular gasket is fitted to the mullions and transoms defining a quadrangular frame section in which
5 a panel member is to be mounted, and then the panel member is fitted in the quadrangular gasket by deforming the exterior side holding pieces of the vertical and horizontal gaskets toward the exterior side, or alternatively, the quadrangular gasket is first fitted
10 around the entire periphery of the panel member, and then the panel member having the quadrangular gasket fitted around the periphery is mounted onto the mullions and transoms. Next, in the condition that the panel member is temporarily being held by the interior side receiving
15 pieces and the exterior side holding pieces of the vertical and horizontal gaskets, the zippers are fitted to the gaskets. The zippers serve to prevent the deformation of the exterior side holding pieces of the gaskets to fix the panel member firmly, and to prevent
20 the penetration of rain water and so forth between the adjacent gaskets.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



FIG. 1

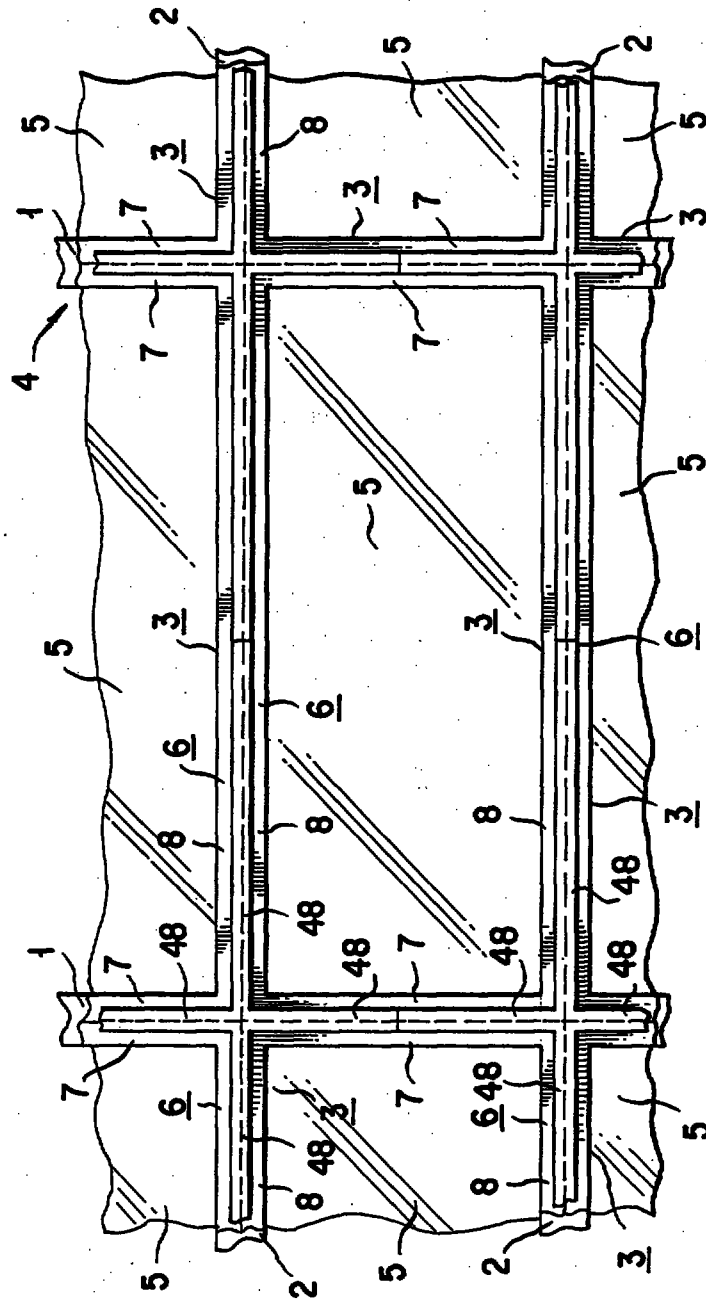




FIG. 2


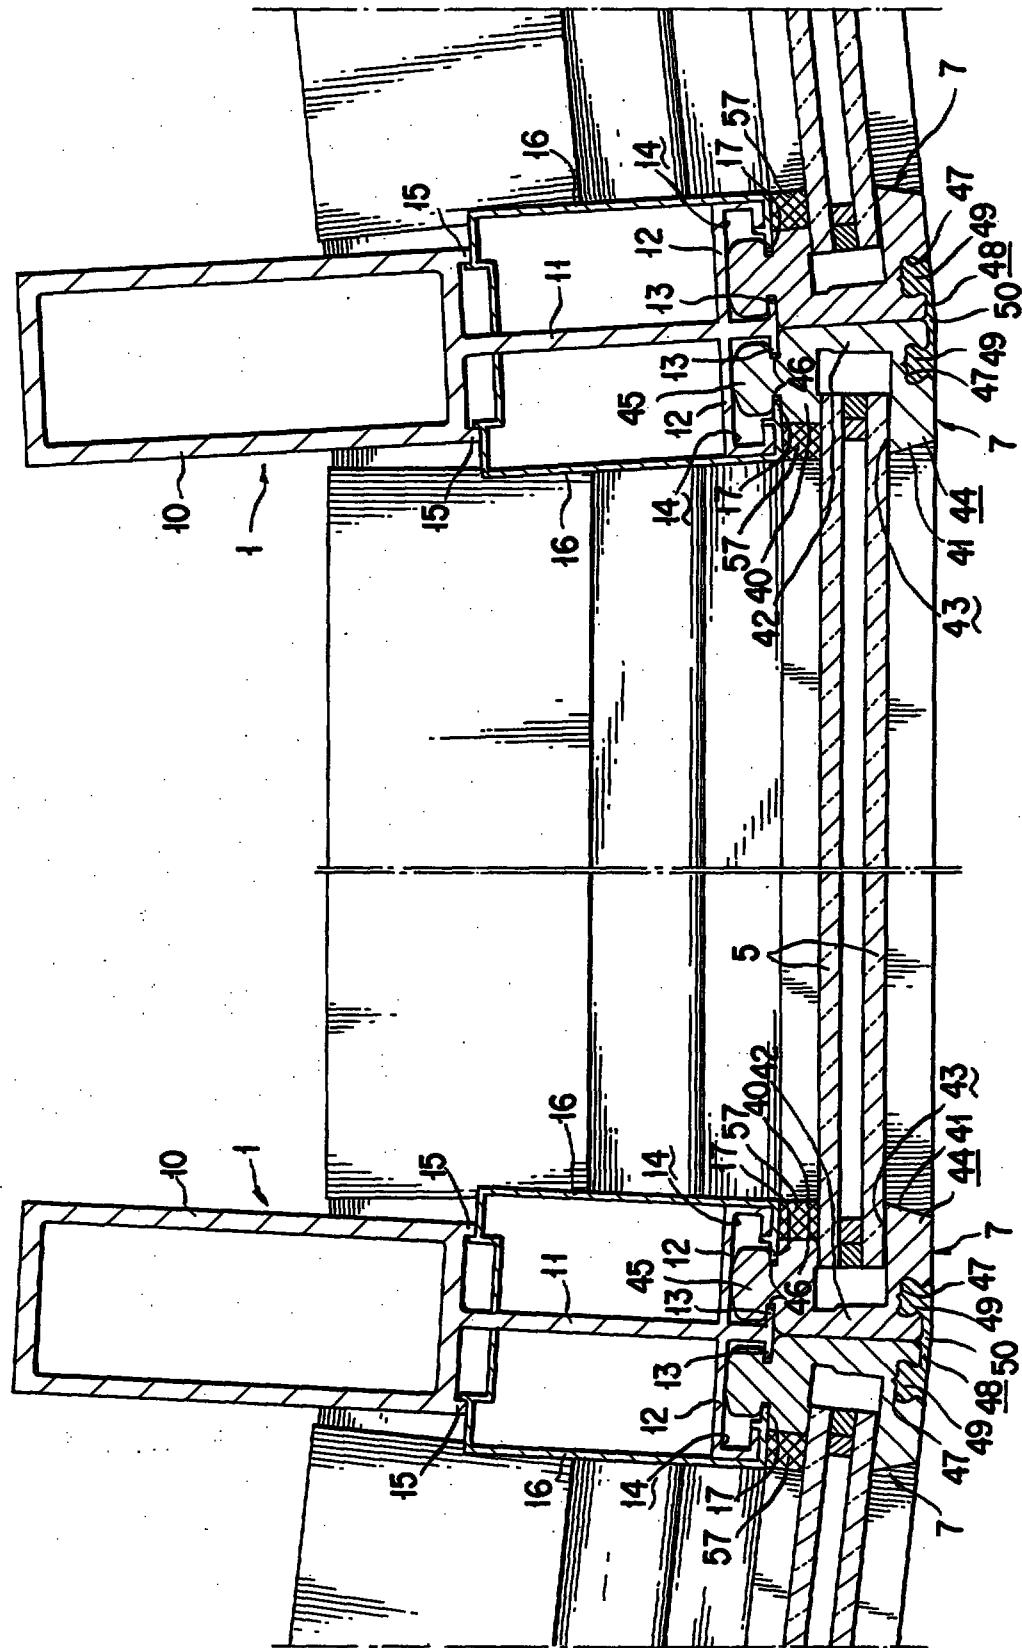





FIG. 3



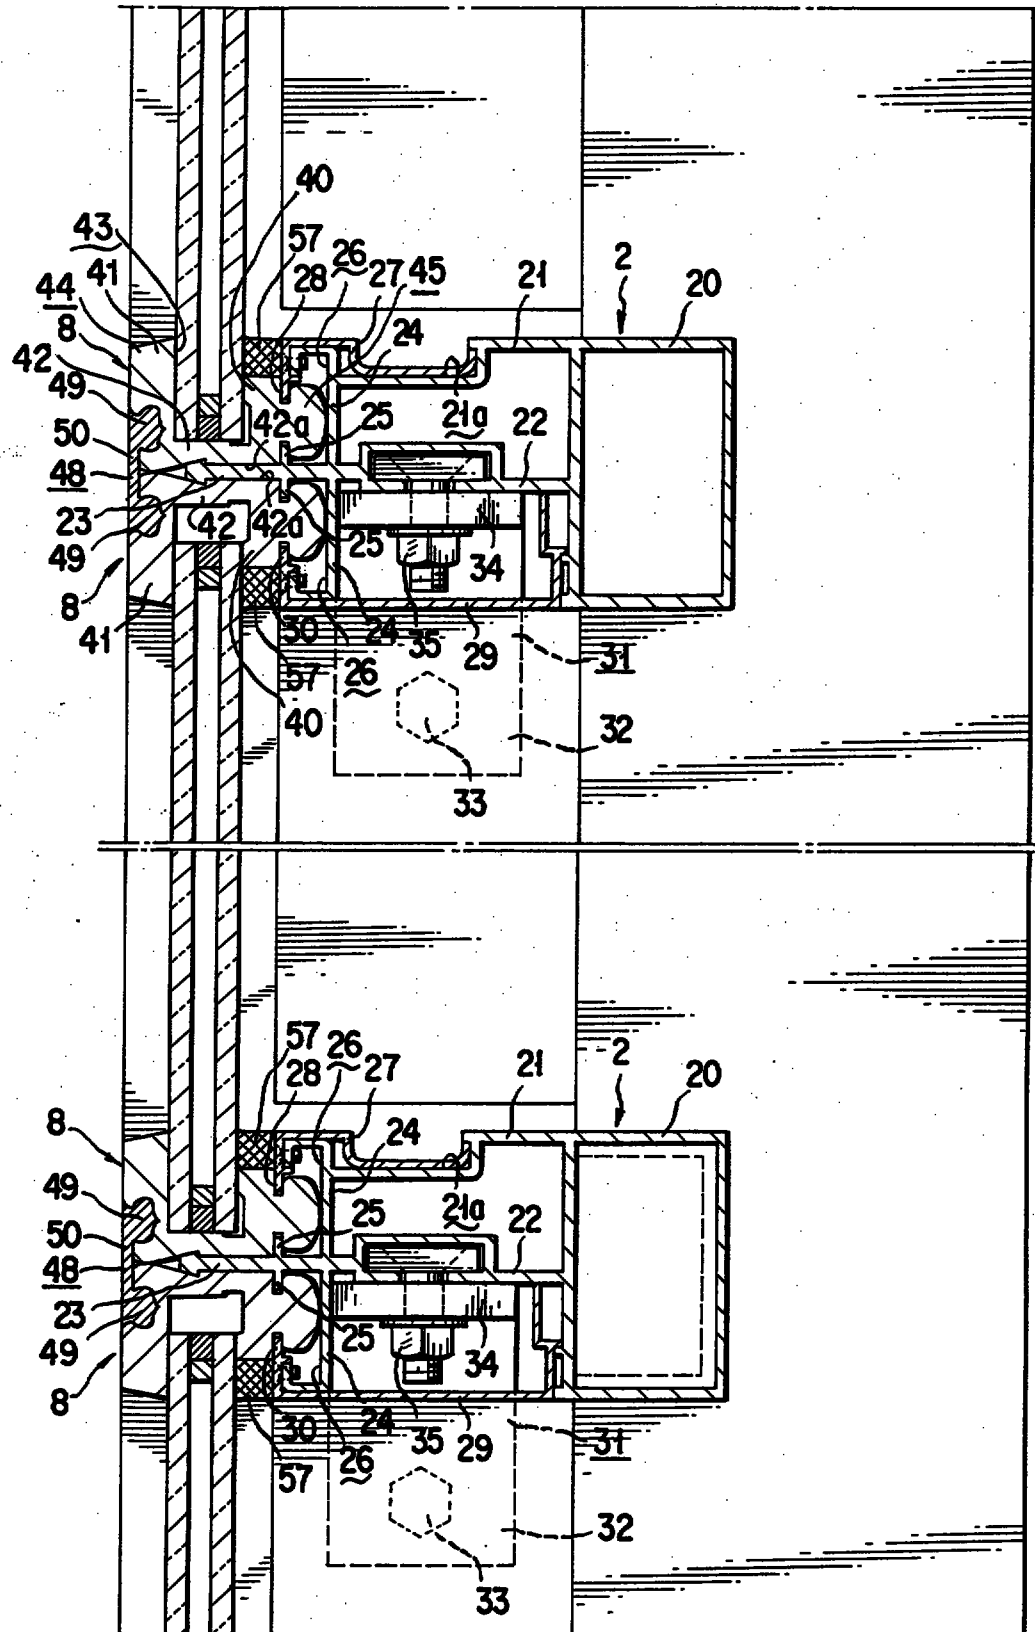

THIS SHEET HAS BEEN
REPLACED

FIG. 4

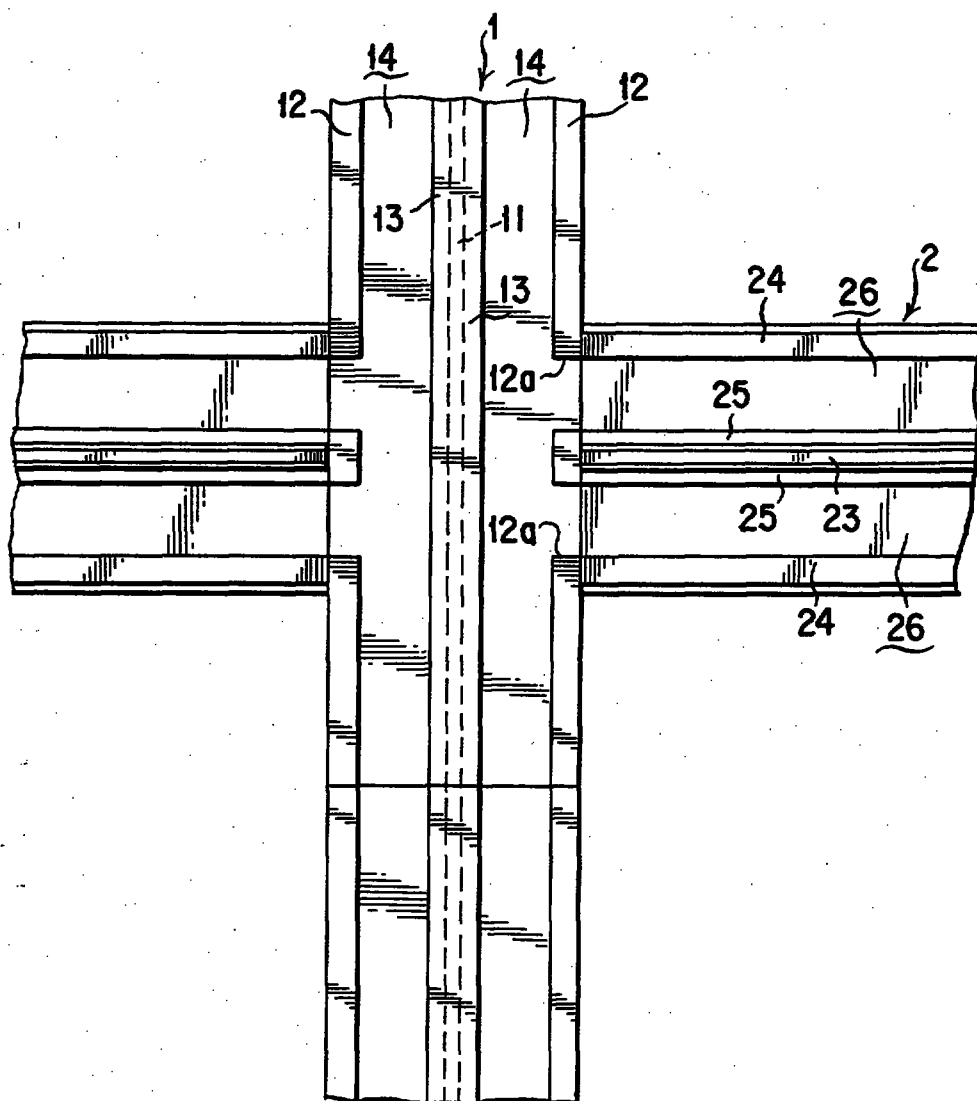


THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



FIG. 5

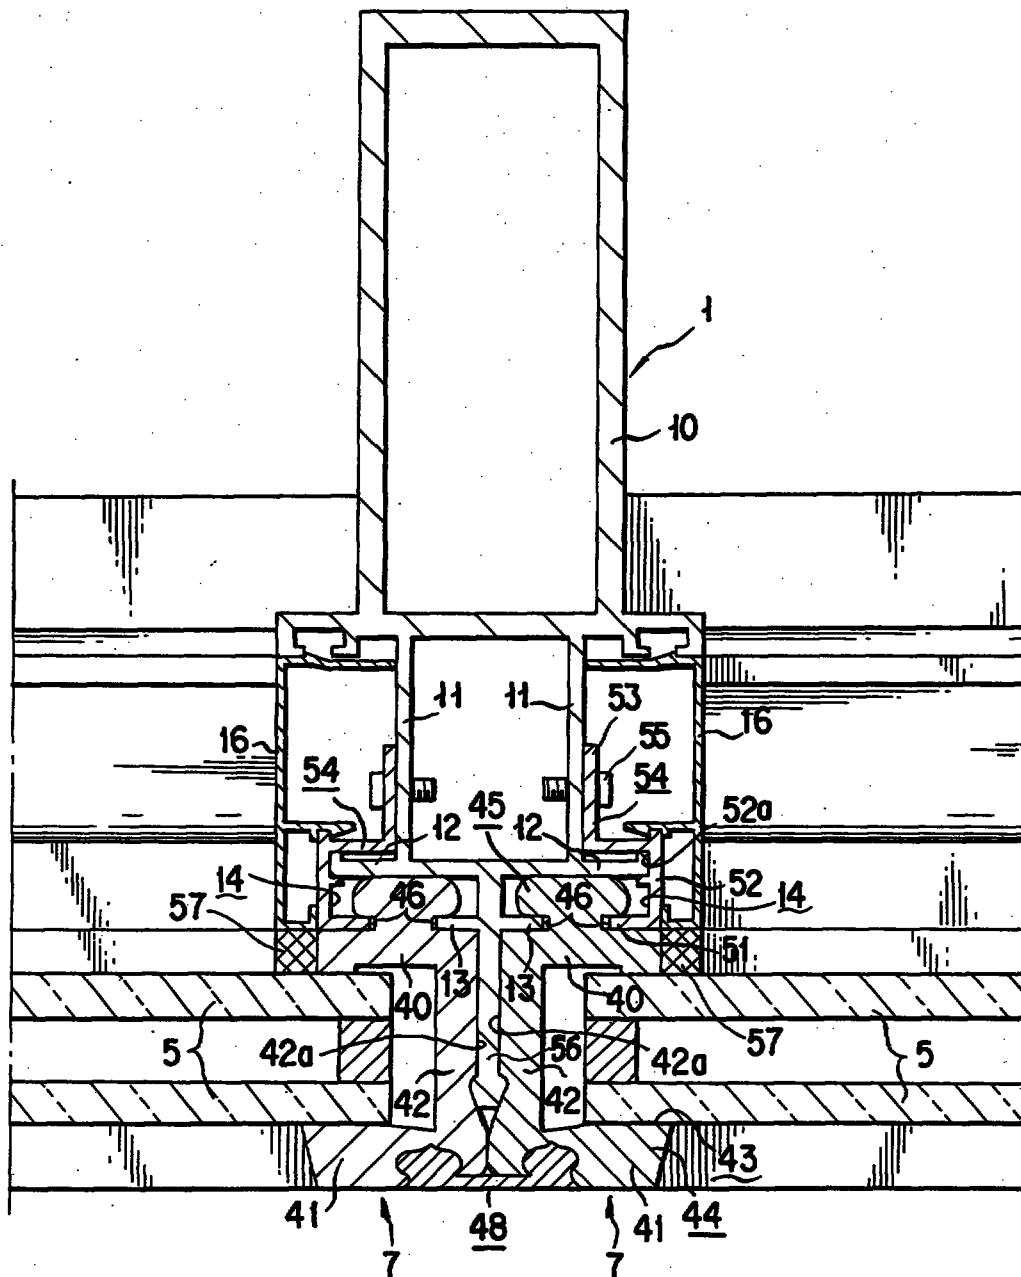


THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



FIG. 6

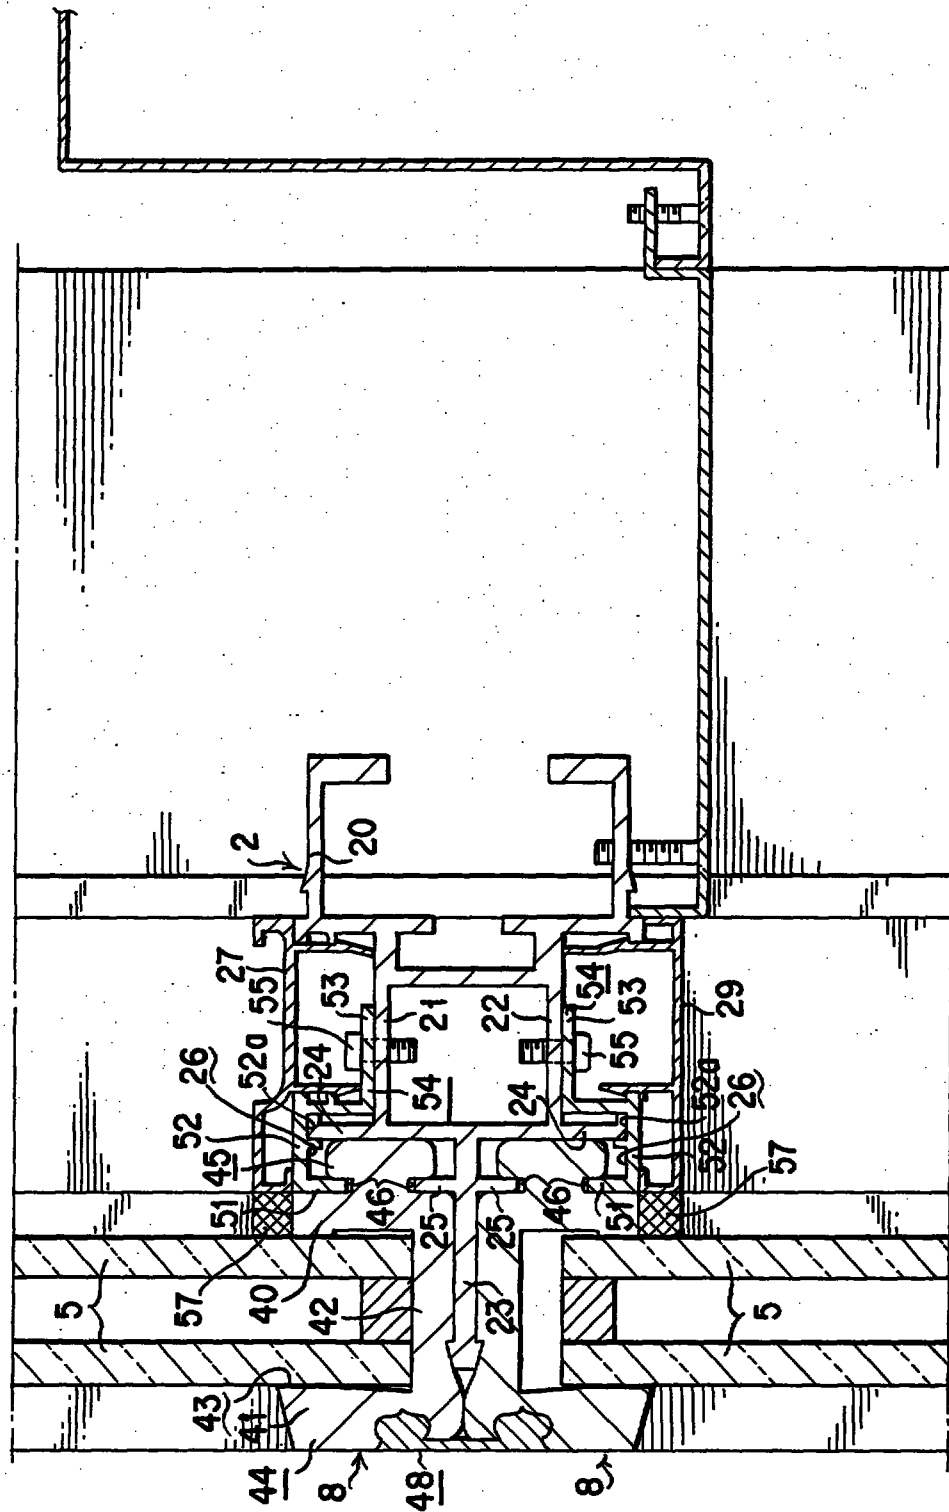


PANEL MEMBER MOUNTING STRUCTURE OF CURTAIN WALL

18 DEC 1995

ABSTRACT OF THE DISCLOSURE

A panel member mounting structure for a curtain wall has a frame body comprising a plurality of quadrangular frame sections defined by mullions and transoms. For each quadrangular frame section, a quadrangular gasket constituted of left and right vertical gaskets and upper and lower horizontal gaskets is applied. In panel member mounting operation, first the quadrangular gasket is fitted to the mullions and transoms defining a quadrangular frame section, and then the panel member is fitted in the quadrangular gasket by deforming the exterior side holding pieces of the vertical and horizontal gaskets toward the exterior side. Next, in the state that the panel member is temporarily being held by the exterior side holding pieces of the vertical and horizontal gaskets, the zippers are fitted to the gaskets, thereby preventing the deformation of the exterior side holding pieces of the gaskets to fix the panel member firmly.

1

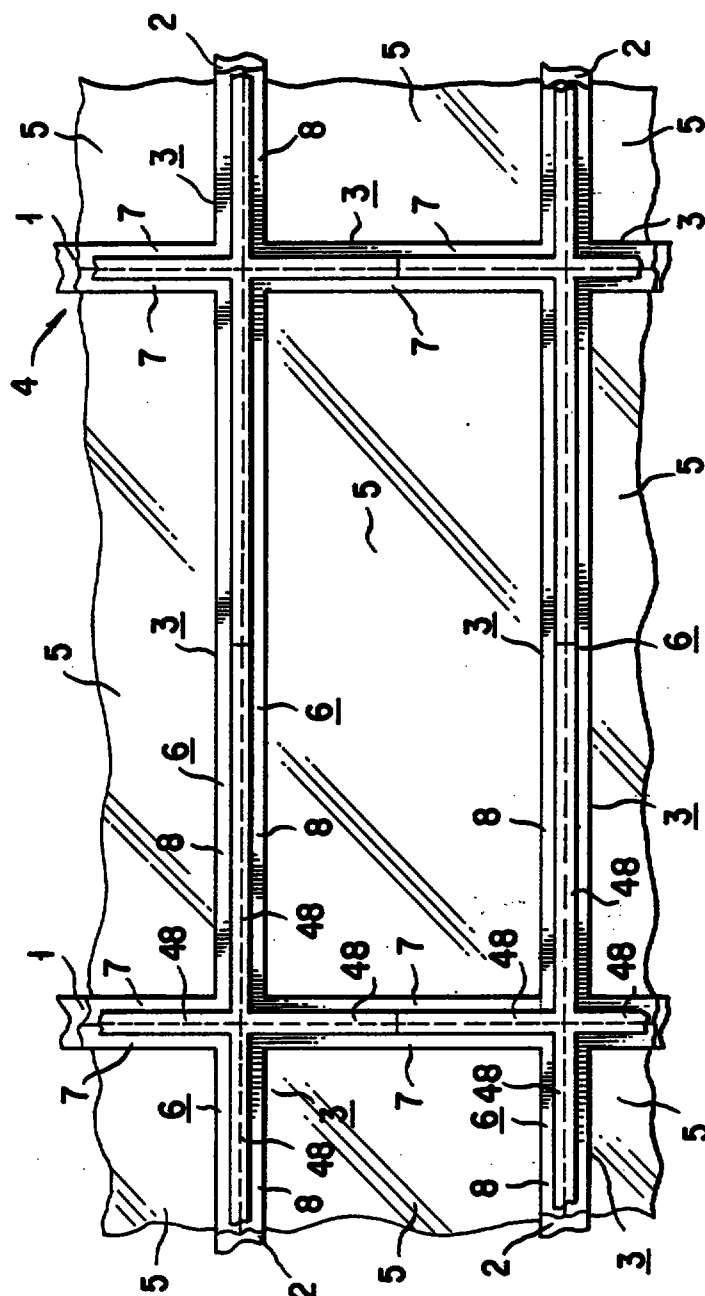

Date : 18 DEC 1995

FIG. 2



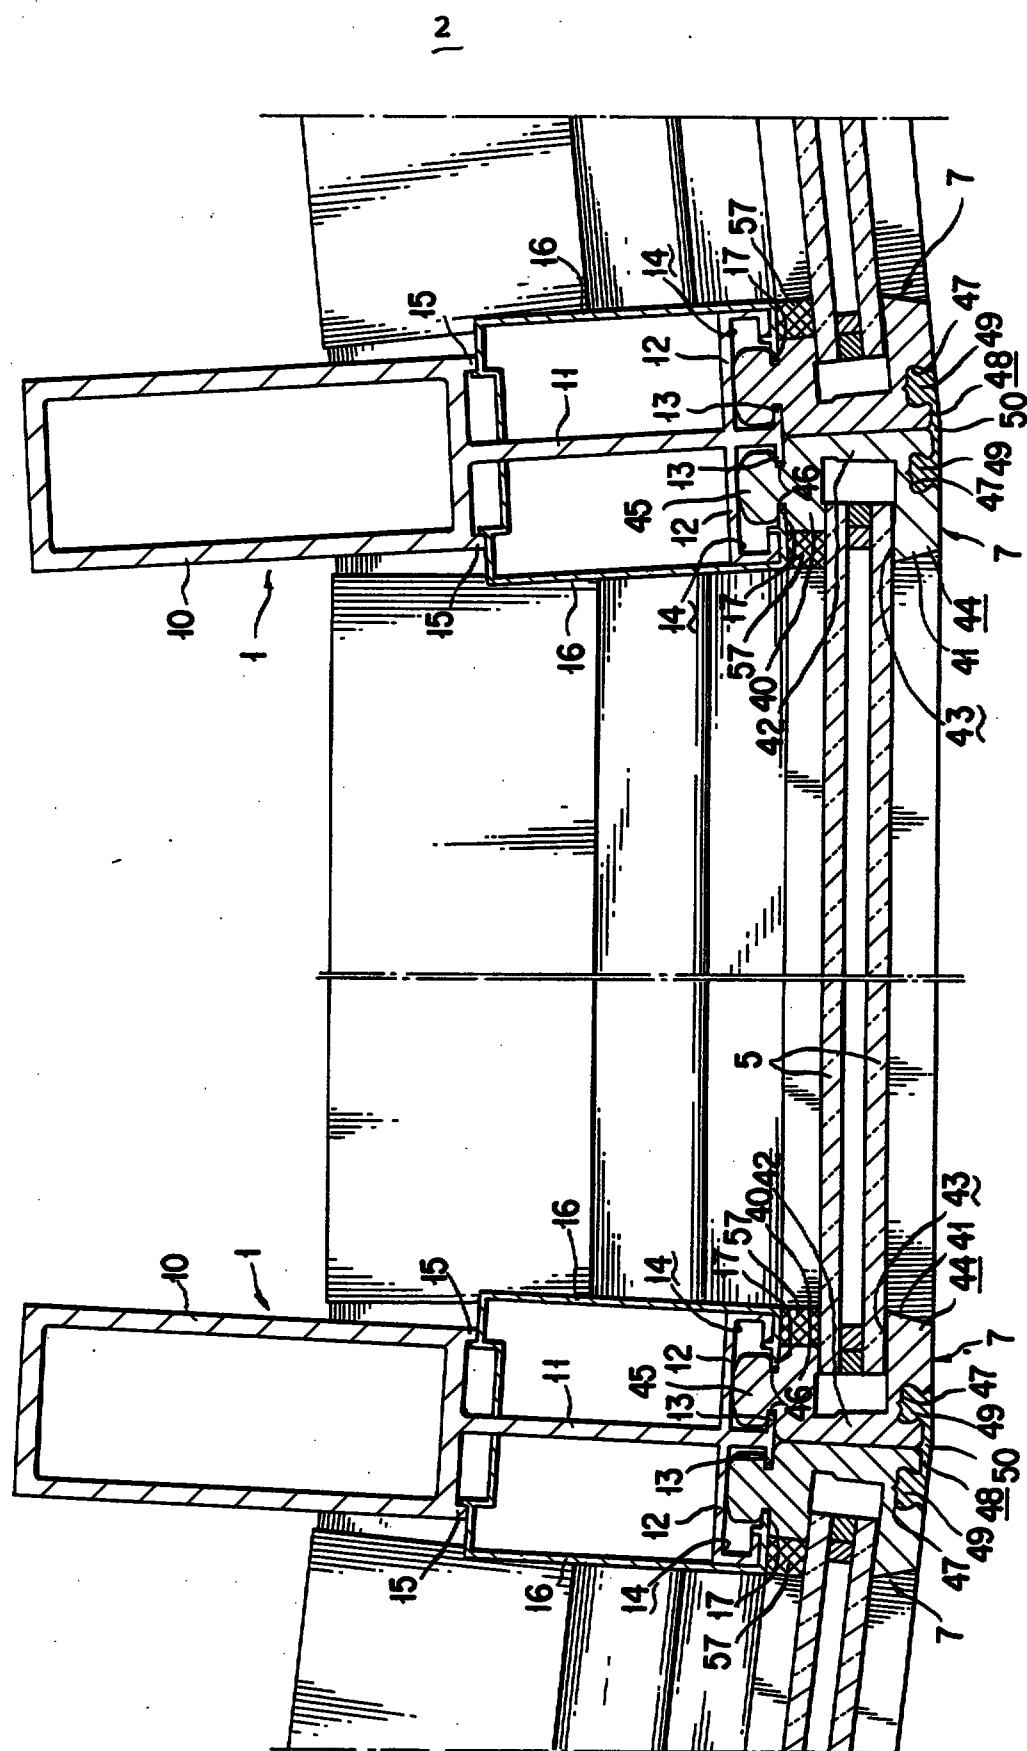


FIG. 3

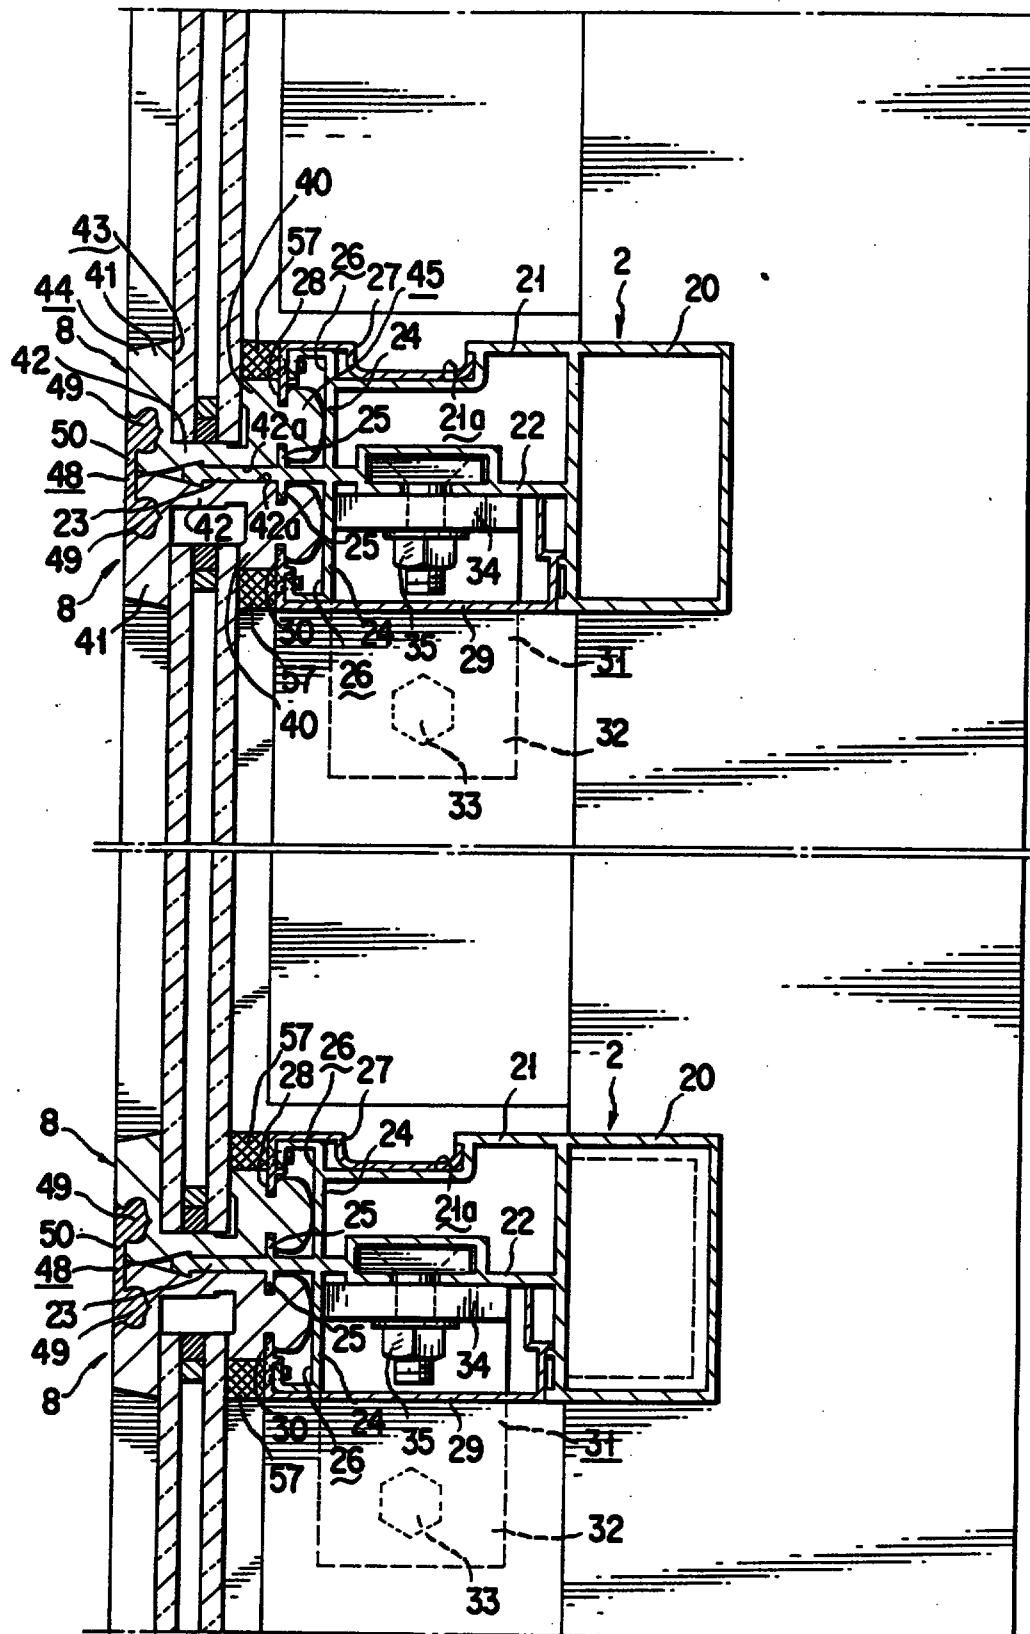

4

FIG. 4

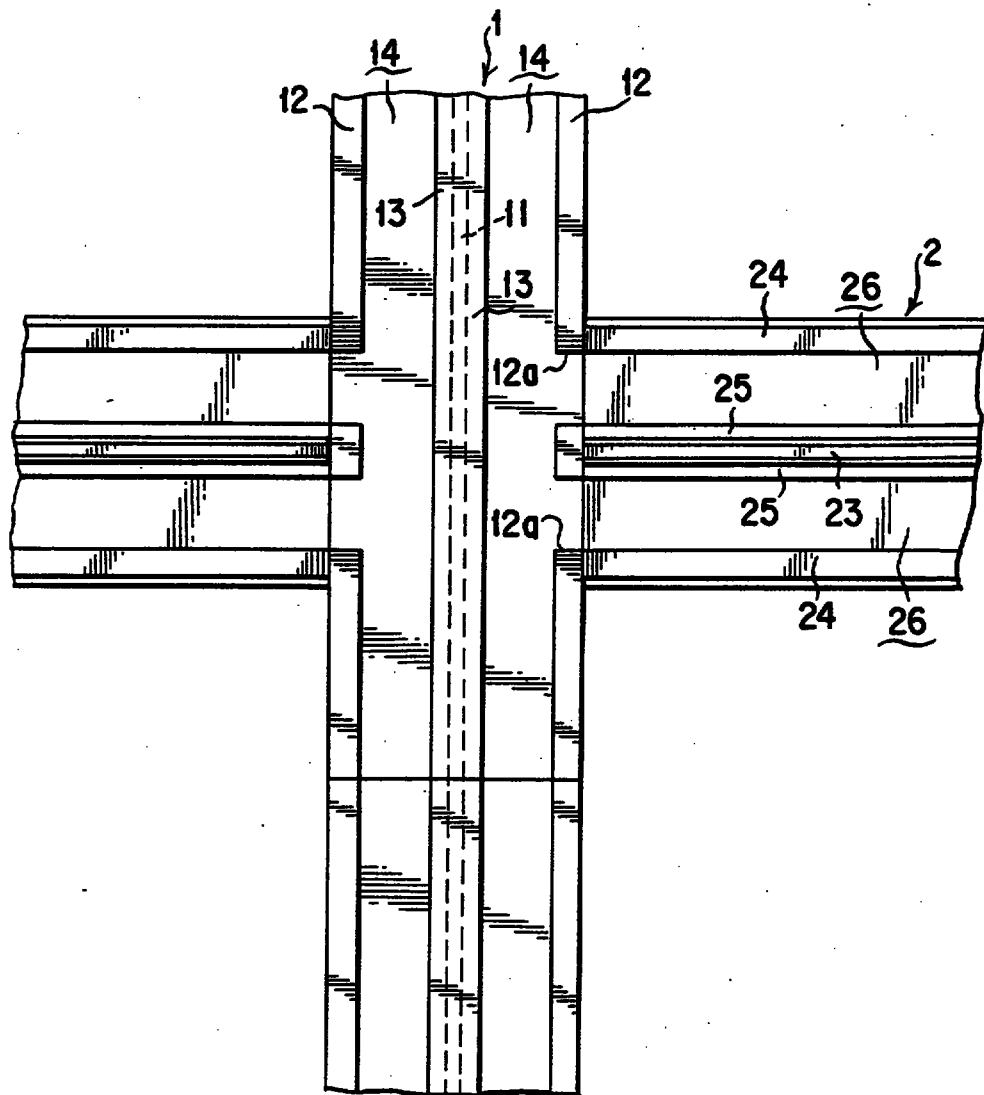

5

FIG. 5


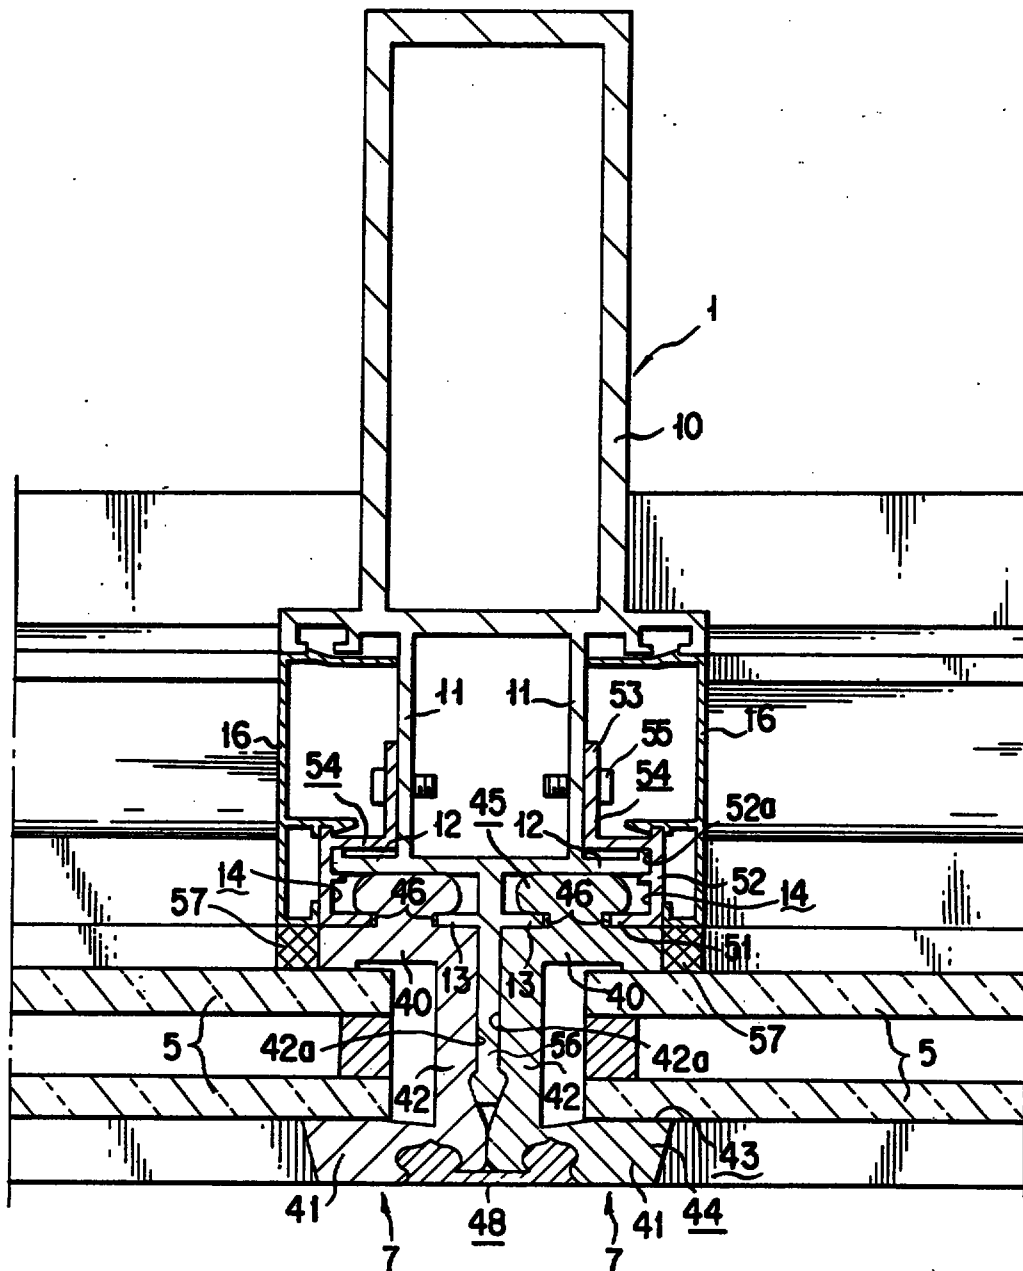


FIG. 6

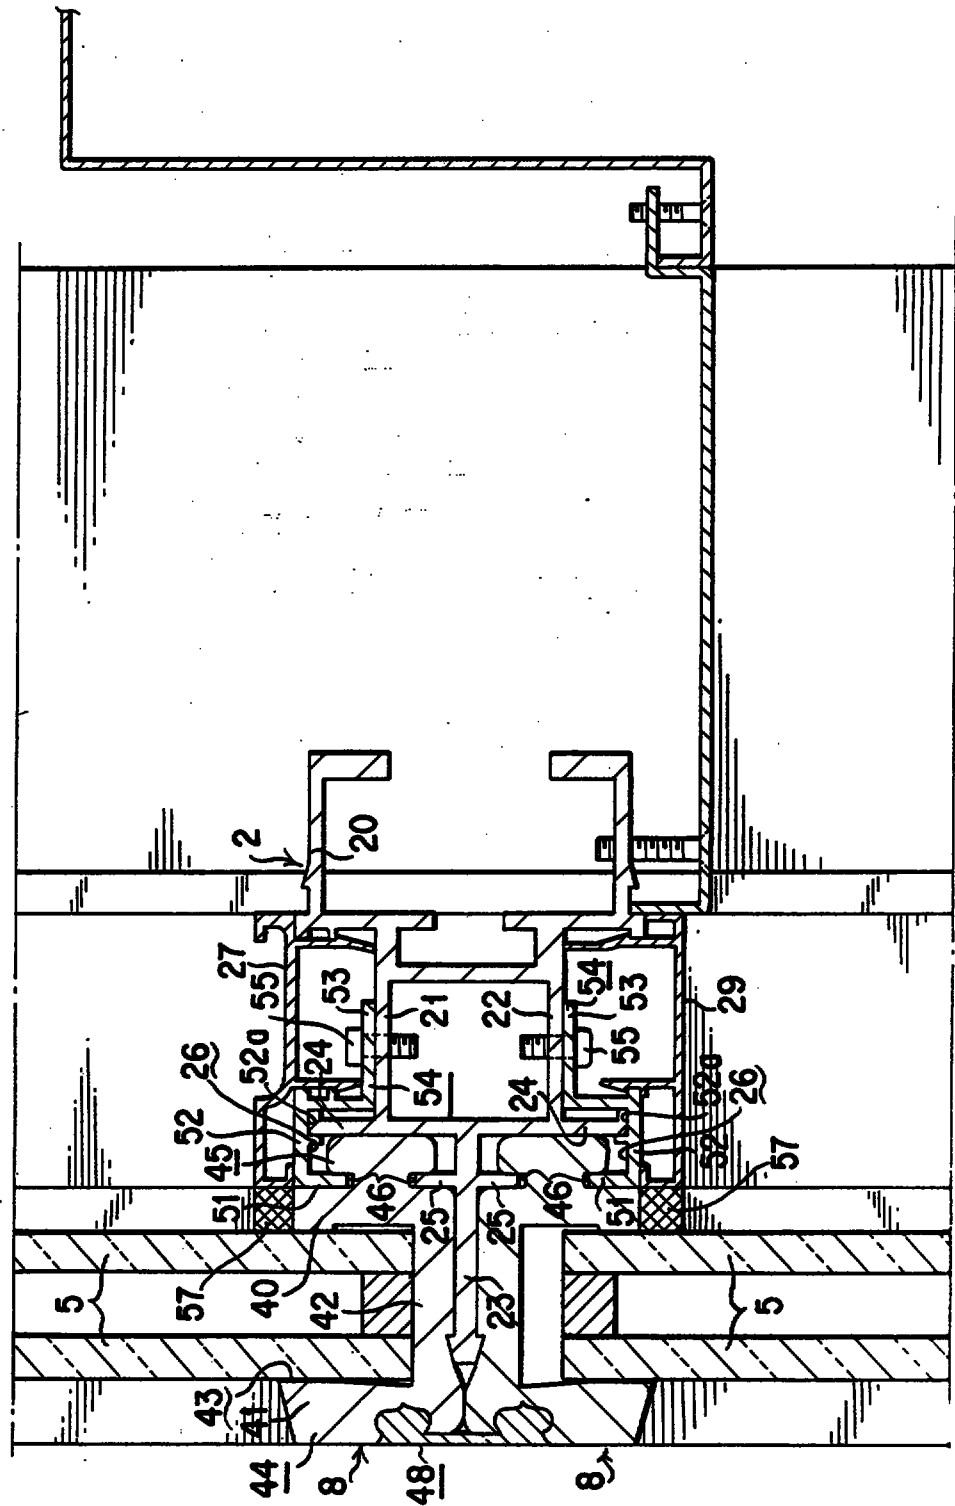

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date : 12 AUG 1990

22

WHAT IS CLAIMED IS :

1. A panel member mounting structure for a curtain wall comprising :

a frame body (4) formed by a plurality of mullions (1) and a plurality of transoms (2) so as to comprise a plurality of quadrangular frame sections (3);

a plurality of quadrangular gaskets (6) each formed by a pair of vertical gaskets (7) and a pair of horizontal gaskets (8) integrally connected in quadrangular configuration and each installed on the exterior side of mullions (1) and transoms (2) defining one of said quadrangular frame sections (3) so as to hold a panel member (5) to be mounted in said one of said quadrangular frame sections (3), each of said vertical and horizontal gaskets (7, 8) having a gasket main body (44) and a mounting portion (45) integrally formed with said gasket main body (44) on the interior side thereof, a pair of grooves (46) being formed between said gasket main body (44) and said mounting portion (45) by which said vertical and horizontal gaskets (7, 8) are firmly held on the corresponding mullion (1) and transom (2), respectively, said gasket main body (44) having a panel member receiving groove (43) defined by an interior side receiving piece (40) and an exterior side holding piece (41) integrally connected through a connecting piece (42) and a hollow portion (47) provided in the connecting area of said exterior side holding piece (41) and said

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Date : 12 AUG 1996

23



connecting piece (42) and opening to the exterior side so as to make said exterior side holding piece (41) deformable toward the exterior side; and

a plurality of zippers (48) each having a pair of fitting projections (49) integrally connected through a connecting plate (50) and fitted between a pair of said hollow portions (47) of horizontally adjacent vertical gaskets (7) so as to joint and cover contact edges of said horizontally adjacent vertical gaskets (7) and/or fitted between a pair of said hollow portions (47) of vertically adjacent horizontal gaskets (8) so as to joint and cover contact edges of said vertically adjacent horizontal gaskets (8).

2. A panel member mounting structure as set forth in claim 1, wherein said mullion (1) has a mullion body (10) located on the interior side and a projecting plate (11) integrally formed on the exterior side of said mullion body (10) to project toward the exterior side, said projecting plate (11) has a pair of left and right L-shaped plates (12) in the vicinity of the exterior side end and a pair of projecting pieces (13) on the exterior side end, and said L-shaped plates (12) and said projecting pieces (13) cooperate to define a pair of vertically extending left and right hollow grooves (14) each opening to the exterior side for receiving said mounting portion (45) of said vertical gasket (7).

This Sheet Has Been Replaced



REPLACEMENT SHEET

Date : 12 AUG 1996

26



8. A panel member mounting structure as set forth in claim 1, wherein said transom (2) has a transom body (20) located on the interior side and an upper and lower horizontal plates (21, 22) each integrally formed on the exterior side of said transom body (20) to project toward the exterior side, a panel member supporting plate (23) having a pair of upper and lower projecting pieces (25) is integrally formed with said transom (2) to project toward the exterior side, a pair of gasket holders (54) each having a gasket holding piece (51) are connected to said transom (2), and said projecting pieces (25) and said gasket holders (54) cooperate to define a pair of horizontally extending upper and lower hollow grooves (26) each opening to the exterior side for receiving said mounting portion (45) of said horizontal gasket (8).

9. A panel member mounting structure as set forth in claim 8, wherein an attachment (29) is fitted between said transom body (20) and said gasket holder (54).

10. A panel member mounting structure as set forth in claim 3 or 6, wherein said projecting piece (13) and said gasket holding piece (17; 51) are respectively inserted into said pair of grooves (46) of said vertical gasket (7).

This Sheet Has Been Replaced



REPLACEMENT SHEET

Date : 12 AUG 1996

27



11. A panel member mounting structure as set forth in claim 5 or 8, wherein said projecting piece (25) and said gasket holding piece (28; 30; 51) are respectively inserted into said pair of grooves (46) of said horizontal gasket (8) respectively.

12. A panel member mounting structure as set forth in claim 1, wherein said plurality of zippers (48) comprises zippers of cross configuration each fitted at a joint point of four quadrangular frame sections (3) and integrally jointing and covering contact edges of a pair of vertical gaskets (7) extending upwardly from said joint point, a pair of vertical gaskets (7) extending downwardly from said joint point, a pair of horizontal gaskets (8) extending to the left from said joint point and a pair of horizontal gaskets (8) extending to the right from said joint point.

13. A panel member mounting structure as set forth in claim 1, wherein said plurality of zippers (48)

CLAIMS :

This Sheet Has Been Replaced



* C L M S *

1. A panel member mounting structure for a curtain wall comprising:

a frame body (4) formed by a plurality of mullions (1) and a plurality of transoms (2) so as to comprise a plurality of quadrangular frame sections (3);

a plurality of quadrangular gaskets (6) each formed by a pair of vertical gaskets (7) and a pair of horizontal gaskets (8) integrally connected in quadrangular configuration and each installed on the exterior side of mullions (1) and transoms (2) defining one of said quadrangular frame sections (3) so as to hold a panel member (5) to be mounted in said one of said quadrangular frame sections (3), each of said vertical and horizontal gaskets (7, 8) having a gasket main body (44) and a mounting portion (45) integrally formed with said gasket main body (44) on the interior side thereof, a pair of grooves (46) being formed between said gasket main body (44) and said mounting portion (45) by which said vertical and horizontal gaskets (7, 8) are firmly held on the corresponding mullion (1) and transom (2), respectively, said gasket main body (44) having a panel

This Sheet Has Been Replaced



* C L M S *

member receiving groove (43) defined by an interior side receiving piece (40) and an exterior side holding piece (41) integrally connected through a connecting piece (42) and a hollow portion (47) provided in the connecting area of said exterior side holding piece (41) and said connecting piece (42) and opening to the exterior side so as to make said exterior side holding piece (41) deformable toward the exterior side; and

a plurality of zippers (48) each having a pair of fitting projections (49) integrally connected through a connecting plate (50) and fitted ~~{between}~~ in a pair of said hollow portions (47) of horizontally adjacent vertical gaskets (7) so as to ~~{joint}~~ clamp and closely join said horizontally adjacent vertical gaskets (7) and cover the contact edges {of said horizontally adjacent vertical gaskets (7)} thereof and/or fitted {between} in a pair of said hollow portions (47) of vertically adjacent horizontal gaskets (8) so as to ~~{joint}~~ clamp and closely join said vertically adjacent horizontal gaskets (8) and cover the contact edges {of said vertically adjacent horizontal gaskets (8)} thereof.



22

CLAIMS :

REPLACEMENT SHEETS		SG
☐ Description :	paged to paged	
☒ Claim(s) :	paged 22 to paged 29	
☐ Drawing(s) :	paged to paged	
☒ Abstract :	paged 30 to paged 31	
DATE OF RECEIPT		08 MAR 1997

1. A panel member mounting structure for a curtain wall comprising:

a frame body (4) formed by a plurality of mullions (1) and a plurality of transoms (2) so as to comprise a plurality of quadrangular frame sections (3);

a plurality of quadrangular gaskets (6) each formed by a pair of vertical gaskets (7) and a pair of horizontal gaskets (8) integrally connected in quadrangular configuration and each installed on the exterior side of mullions (1) and transoms (2) defining one of said quadrangular frame sections (3) so as to hold a panel member (5) to be mounted in said one of said quadrangular frame sections (3), each of said vertical and horizontal gaskets (7, 8) having a gasket main body (44) and a mounting portion (45) integrally formed with said gasket main body (44) on the interior side thereof, a pair of grooves (46) being formed between said gasket main body (44) and said mounting portion (45) by which said vertical and horizontal gaskets (7, 8) are firmly held on the corresponding mullion (1) and transom (2), respectively, said gasket main body (44) having a panel



This is the replacement sheet

Date: 8/3/97

member receiving groove (43) defined by an interior side receiving piece (40) and an exterior side holding piece (41) integrally connected through a connecting piece (42) and a hollow portion (47) provided in the connecting area of said exterior side holding piece (41) and said connecting piece (42) and opening to the exterior side so as to make said exterior side holding piece (41) deformable toward the exterior side; and

a plurality of zippers (48) each having a pair of fitting projections (49) integrally connected through a connecting plate (50) and fitted ~~{between}~~ in a pair of said hollow portions (47) of horizontally adjacent vertical gaskets (7) so as to ~~{joint}~~ clamp and closely join said horizontally adjacent vertical gaskets (7) and cover the contact edges ~~{of said horizontally adjacent vertical gaskets (7)}~~ thereof and/or fitted ~~{between}~~ in a pair of said hollow portions (47) of vertically adjacent horizontal gaskets (8) so as to ~~{joint}~~ clamp and closely join said vertically adjacent horizontal gaskets (8) and cover the contact edges ~~{of said vertically adjacent horizontal gaskets (8)}~~ thereof.



- 24 -

This is the replacement sheet

Date: 8/3/97

2. A panel member mounting structure as set forth in claim 1, wherein said mullion (1) has a mullion body (10) located on the interior side and a projecting plate (11) integrally formed on the exterior side of said mullion body (10) to project toward the exterior side, said projecting plate (11) has a pair of left and right L-shaped plates (12) in the vicinity of the exterior side end and a pair of projecting pieces (13) on the exterior side end, and said L-shaped plates (12) and said projecting pieces (13) cooperate to define a pair of vertically extending left and right hollow grooves (14) each opening to the exterior side for receiving said mounting portion (45) of said vertical gasket (7).



This is the replacement sheet

- 25 -

Date: 8/3/97

3. A panel member mounting structure as set forth in claim 2, wherein an attachment (16) having a gasket holding piece (17) is fitted between said mullion main body (10) and said L-shaped plate (12).

5

4. A panel member mounting structure as set forth in claim 1, wherein said transom (2) has a transom body (20) located on the interior side, an upper and lower horizontal plates (21, 22) each integrally formed on the exterior side of said transom body (20) to project toward the exterior side and a panel member supporting plate (23) integrally extending from the exterior side end of said lower horizontal plate (22) toward the exterior side, said lower horizontal plate (22) has a pair of upper and lower L-shaped plates (24) in the vicinity of the exterior side end and a pair of upper and lower projecting pieces (25) on the exterior side end, and said L-shaped plates (24) and said projecting pieces (25) cooperate to define a pair of horizontally extending upper and lower hollow grooves (26) each opening to the exterior side for receiving said mounting portion (45) of said horizontal gasket (8).

5. A panel member mounting structure as set forth in claim 4, wherein an attachment (27; 29) having a

25



This is the replacement sheet

- 26 -

Date: 8/3/97

gasket holding piece (28; 30) is fitted between said upper horizontal plate (21) and said upper L-shaped plate (24) and/or between said transom body (20) and said lower L-shaped plate (24).

5

6. A panel member mounting structure as set forth in claim 1, wherein said mullion (1) has a mullion body (10) located on the interior side and a pair of projecting plates (11) integrally formed on the exterior side of said mullion body (10) to project toward the exterior side, a gasket supporting plate (56) having a pair of left and right projecting pieces (13) is integrally formed with said mullion (1) to project toward the exterior side, a pair of gasket holders (54) each having a gasket holding piece (51) are connected to said mullion (1), and said projecting pieces (13) and said gasket holders (54) cooperate to define a pair of vertically extending left and right hollow grooves (14) each opening to the exterior side for receiving said mounting portion (45) of said vertical gasket (7).

7. A panel member mounting structure as set forth in claim 6, wherein an attachment (16) is fitted between said mullion body (10) and said gasket holder (54).

25



This is the replacement sheet

- 27 -

Date: 8/3/97

8. A panel member mounting structure as set forth in claim 1, wherein said transom (2) has a transom body (20) located on the interior side and an upper and lower horizontal plates (21, 22) each integrally formed on the exterior side of said transom body (20) to project toward the exterior side, a panel member supporting plate (23) having a pair of upper and lower projecting pieces (25) is integrally formed with said transom (2) to project toward the exterior side, a pair of gasket holders (54) each having a gasket holding piece (51) are connected to said transom (2), and said projecting pieces (25) and said gasket holders (54) cooperate to define a pair of horizontally extending upper and lower hollow grooves (26) each opening to the exterior side for receiving said mounting portion (45) of said horizontal gasket (8).

9. A panel member mounting structure as set forth in claim 8, wherein an attachment (29) is fitted between said transom body (20) and said gasket holder (54).

10 A panel member mounting structure as set forth in claim 3 or 6, wherein said vertical gasket (7) has a pair of grooves (46) formed between said mounting portion (45) and said interior side receiving piece (40) of said gasket main body (44), and said projecting piece (13) and

Date: 8/3/97



- 28 -

said gasket holding piece (17; 51) are inserted into said grooves (46) respectively.

11. A panel member mounting structure as set forth in claim 5 or 8, wherein said horizontal gasket (8) has a pair of grooves (46) formed between said mounting portion (45) and said interior side receiving piece (40) of said gasket main body (44), and said projecting piece (25) and said gasket holding piece (28; 30; 51) are inserted into said grooves (46) respectively.

12. A panel member mounting structure as set forth in claim 1, wherein said plurality of zippers (48) comprises zippers of cross configuration each fitted at a joint point of four quadrangular frame sections (3) and integrally jointing and covering contact edges of a pair of vertical gaskets (7) extending upwardly from said joint point, a pair of vertical gaskets (7) extending downwardly from said joint point, a pair of horizontal gaskets (8) extending to the left from said joint point and a pair of horizontal gaskets (8) extending to the right from said joint point.

13. A panel member mounting structure as set forth in claim 1, wherein said plurality of zippers (48)

Date: 8/3/97



- 29 -

comprises zippers each extending vertically beyond at least one quadrangular frame section (3) and jointing and covering contact edges of vertically adjacent pairs of vertical gaskets (7) continuously.

5

14. A panel member mounting structure as set forth in claim 1, wherein said plurality of zippers (48) comprises zippers each extending horizontally beyond at least one quadrangular frame section (3) and jointing and covering contact edges of horizontally adjacent pairs of horizontal gaskets (8) continuously.

15. A panel member mounting structure as set forth in claim 3, 5, 7 or 9, wherein wet type seal member (57) is filled between the interior side surface of said panel member (5) and the exterior side surface of said attachment (16; 27; 29).

16. A panel member mounting structure as set forth in claim 1, wherein said quadrangular gasket (6) has a stiffness sufficient for temporarily supporting said panel member (5) on said quadrangular frame section (3) before said zipper (48) is fitted.

20

Date: 8/3/97

This Sheet Has Been Replaced



- 30 -

PANEL MEMBER MOUNTING STRUCTURE OF CURTAIN WALL

ABSTRACT OF THE DISCLOSURE

A panel member mounting structure for a curtain wall has a frame body comprising a plurality of quadrangular frame sections defined by a plurality of mullions and a plurality of transoms. For each quadrangular frame section, a quadrangular gasket constituted of left and right vertical gaskets and upper and lower horizontal gaskets is applied. Each of the vertical and horizontal gaskets has a gasket main body and a mounting portion integrally formed with the gasket main body. The gasket main body has a panel member receiving groove defined by an interior side receiving piece and an exterior side holding piece integrally connected through a connecting piece and a hollow portion provided in the connecting area of the exterior side holding piece and the connecting piece and opening to the exterior side so as to make the exterior side holding piece deformable toward the exterior side. Zippers each having a pair of fitting projections integrally connected through a connecting plate are fitted between a pair of the hollow portions of horizontally adjacent vertical gaskets so as to joint and cover contact edges of the horizontally adjacent vertical gaskets and between a pair of the hollow portions of vertically adjacent horizontal gaskets so as to joint and cover contact edges of the

This is the replacement sheet

Date: 8/3/97

This Sheet Has Been Replaced



- 31 -

vertically adjacent horizontal gaskets.

In the panel member mounting operation, first the quadrangular gasket is fitted to the mullions and transoms defining a quadrangular frame section in which a panel member is to be mounted, and then the panel member is fitted in the quadrangular gasket by deforming the exterior side holding pieces of the vertical and horizontal gaskets toward the exterior side, or alternatively, the quadrangular gasket is first fitted around the entire periphery of the panel member, and then the panel member having the quadrangular gasket fitted around the periphery is mounted onto the mullions and transoms. Next, in the condition that the panel member is temporarily being held by the interior side receiving pieces and the exterior side holding pieces of the vertical and horizontal gaskets, the zippers are fitted to the gaskets. The zippers serve to prevent the deformation of the exterior side holding pieces of the gaskets to fix the panel member firmly, and to prevent the penetration of rain water and so forth between the adjacent gaskets.

22 JUL 1999

-30-

PANEL MEMBER MOUNTING STRUCTURE OF CURTAIN WALL
ABSTRACT OF THE DISCLOSURE

A panel member mounting structure for a curtain wall has a frame body comprising a plurality of quadrangular frame sections defined by mullions and transoms. For each quadrangular frame section, a quadrangular gasket constituted of left and right vertical gaskets and upper and lower horizontal gaskets is applied. In the panel member mounting operation, first the quadrangular gasket is fitted to the mullions and transoms defining a quadrangular frame section, and then the panel member is fitted in the quadrangular gasket by deforming the exterior side holding pieces of the vertical and horizontal gaskets toward the exterior side. Next, in the state that the panel member is temporarily being held by the exterior side holding pieces of the vertical and horizontal gaskets, the zippers are fitted to the gaskets, thereby preventing the deformation of the exterior side holding pieces of the gaskets to fix the panel member firmly.