



(51) International Patent Classification:

E05B 65/08 (2006.01) E06B 5/11 (2006.01)
E05C 19/00 (2006.01)

(21) International Application Number:

PCT/GR2013/000042

(22) International Filing Date:

8 August 2013 (08.08.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20120100417 9 August 2012 (09.08.2012) GR

(72) Inventor; and

(71) Applicant : ZAFEIROPOULOS, Grigorios [GR/GR];
16 Korai & Souris Str., 133 41 Ano Liossia Attikis (GR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,

KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

[Continued on next page]

(54) Title: ANTI-BURGLARY SLIDING FRAMES SYSTEM

Figure 4

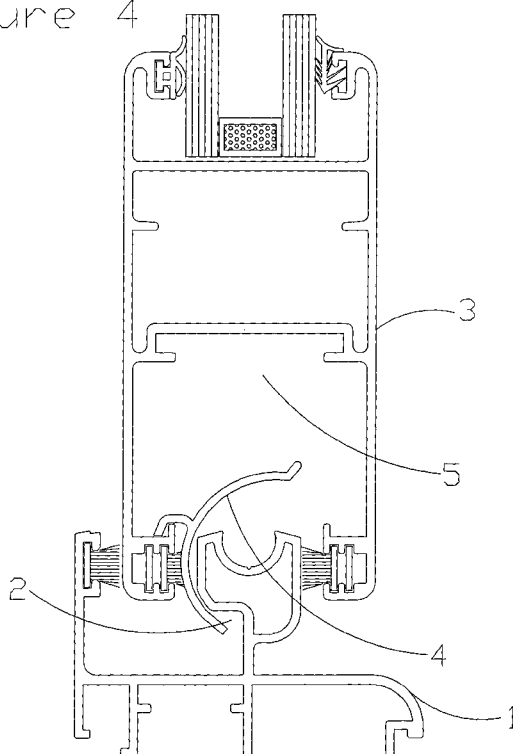

(57) Abstract: By this invention it is possible to construct a sliding frame's system -glazing and shutter-, which has a frame guide profile (1) with a groove (2) -see Figure 1- and a sash profile (3), on which the locking profile (4) is placed into the groove (5) -see Figure 2-. The locking profile (4) has a helical groove (11) -see Figure 7-, where the pin (10) of the sliding framework's cremone enters. Two clamping parts (6) - see Figure 6- are placed within the chamber (5) of the sash (3) at the two edges of the locking profile (4). Each clamping part (6) has a groove (7) as a motion driver of the locking profile (4). As the cremone rotates, it transforms the rotary motion into linear made by the cremone's pin (10), which forces the locking profile (4) to rotate and entrap the movable frame of the sash's profile (3) into the groove (2) of the stable frame guide profile (1) along the full height of a sliding door or window.



(88) Date of publication of the international search report:

3 April 2014