



- (51) **International Patent Classification:**
A62C 35/68 (2006.01) *A62C 31/02* (2006.01)
- (21) **International Application Number:**
PCT/US2013/020233
- (22) **International Filing Date:**
4 January 2013 (04.01.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/584,641 9 January 2012 (09.01.2012) US
- (71) **Applicant:** TYCO FIRE PRODUCTS LP [US/US]; 1400 Pennbrook Parkway, Landsdale, PA 19446 (US).
- (72) **Inventors:** ALMEIDA, Jose, L.; 5 Rainbow Ct., Warwick, RI 02889 (US). CHAVEZ, Marcelo, J.; 22 Vermont Avenue, Providence, RI 02905 (US).
- (74) **Agent:** LAUB, David, W.; Perkins Coie LLP, 700 Thirteenth Street, N.W., Suite 600, Washington, DC 20005 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) **Title:** FIRE PROTECTION DEVICE

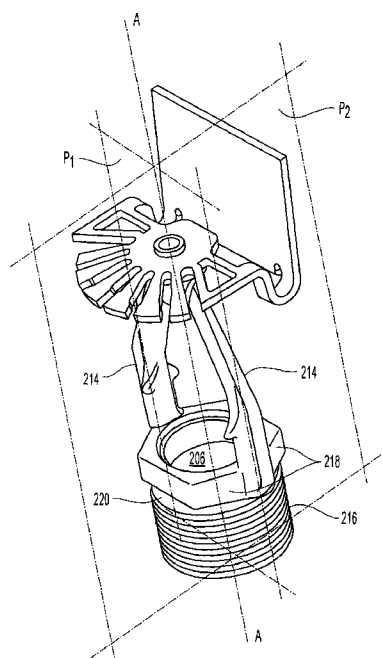


Fig. 1A

(57) **Abstract:** A fire protection device (100) including a frame (200) having a body (210) with an inlet (202) and an outlet (204) disposed spaced along a longitudinal axis of a passageway (206). A pair of arms (214) is disposed in a first plane parallel to the longitudinal axis and coupled to the body. A deflector assembly (300) having a generally planar face portion (310) is distally spaced from the outlet of the body and orthogonal to the longitudinal axis. The face portion includes two openings (332) on opposite sides of a second plane perpendicular to the first plane. A canopy portion (340) is supported on a first side of the first plane from the face portion. The deflector assembly includes a plurality of tines (370) extending along the face portion on a second side of the first plane. Each of the tines have an outer edge (370c) disposed on a common circle centered along the longitudinal axis.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:

27 December 2013