

200000296-4st

1

Specification

19 JAN 2000

IPAS-Ref.

Title of the Invention: A data recording device and a head
stack assembly ✓

Detailed Description of the Invention:

[0001]

[Field of the Invention]

The present invention relates to a data recording device including a data recording disk, such as a hard disk, and a head stack assembly, which solves various problems caused in the case that the data recording device is miniaturized.

[0002]

[Background art]

A hard disk drive device has been used as a data recording device of a personal computer. With the advance of technology, a data recording density has been increased, and a size of a hard disk, i.e. a magnetic data recording disk and a size of a housing have been decreased. The examples of the size, i.e. a diameter, of the previous hard disk are 3.5 inches (95 mm), 2.5 inches (65 mm), 1.9 inches (48 mm) and 1.3 inches (34 mm).

[0003]

Fig.1 shows a structure of a prior hard disk drive device 1. Major parts, such as a hard disk 2, a head stack assembly 3, a magnet 4, an outer crush stopper 5 made of rubber, an inner crush stopper 6 made of rubber, a flexible cable 7 and a control unit 8 mounted on the flexible cable 7, are mounted within a housing 9. The hard disk 2 is supported by a shaft 10 which is rotated by a spindle motor, not shown. The head stack assembly 3 is pivotally moved around a pivot point 12. A voice coil 11 is mounted on the head stack assembly 3. The voice coil 11 and the magnet 4 constitute a voice coil motor. A current supplied to the voice coil 11 is controlled to move the head stack assembly 3 along a radial direction indicated by an arrow

"A" to position a head on a head slider assembly 13 on a data recording track on the hard disk 2 to read data from the data recording track or to write the data into the data recording track. Electrical conductive wires on the flexible cable 7 connect the head and the voice coil 11 to the control unit 8.

[0004]

Fig.2 shows a structure of the prior head stack assembly 3. A plurality of head gimbal assemblies 14 and spacers 15 are stacked on a carriage 16. A screw 18 is used to align the head gimbal assemblies 14, the spacer 15 and the carriage 16. A pivot cartridge 19 is inserted into the aperture and is fixed by a nut 20. A circuit substrate 21 connected to the flexible cable 7 is fixed to the carriage 16 by a screw 22. Each of the head gimbal assembly 14 includes an extended plate 23 on which connecting pads, not shown, electrically connected to the head are arranged. The extended plate 23 is cantilevered from the head gimbal assembly 14. Connecting pads, not shown, which connected to the connecting pads, not shown, on the extended plate 23 are arranged on the circuit substrate 21, and are connected to electrically conductive wires on the flexible cable 7. Electrically conductive wires 26 of the voice coil 11 are connected to connecting pads, not shown, on the circuit substrate 21.

[0005]

[Problems to be solved by the Invention]

The head gimbal assembly 14 is constituted by a plurality of parts, such as an arm assembly 24 and a suspension load beam 25. It is required to align the arm assemblies 24 and the load

beam 25 of each of the head gimbal assemblies 14 to precisely align each of the heads with respect to a center of the pivot point. In previous hard disk drive device of relatively large size, such as 95 mm form factor and 65 mm form factor, an external positioning jig is used to align the arm member 24 and the suspension load beam 25, as shown in Japanese patent application 9-264596 (IBM Docket No. JA9-97-161), assigned to the assignee of the present invention, since the size of the head stack assembly 3 is relatively large. It is noted that the form factor represents outer size or dimension of the housing of the hard disk drive device. The 95 mm form factor indicates the size, i.e. a width, a length and a height of the housing containing the 3.5 inches (95 mm) hard disk, and the 65 mm form factor indicates the size, i.e. a width, a length and a height of the housing containing the 2.5 inches (65 mm) hard disk.

[0006]

The hard disk drive device of the size, such as 34 mm form factor (the size of the housing including the 34 mm (1.3 inches) hard disk) or 27 mm form factor (the size of the housing including the 27 mm (1.0 inches) hard disk), has been recently developed. A first problem in such small size hard disk drive device is that it is difficult to assemble the head gimbal assembly 14 on the carriage by using the external positioning jig since the size of the head gimbal assembly 14 is very small. Therefore, it is desired to assemble the head gimbal assembly 14 on the carriage without using the external positioning jig.

[0007]

A second problem in the small size hard disk drive device is that it is difficult to assemble the outer and inner crush stoppers 5 and 6 made rubber prepared as the discrete parts within the small space of the housing.

[0008]

A third problem in the small size hard disk drive device is that it is difficult to fix the circuit plate 21 by using the screw 22 on the carriage 16.

[0009]

A fourth problem in the small size hard disk drive device is that it is difficult to connect the wires of the voice coil 11 to the connecting pads on the circuit substrate 21.

[0010]

It is one object of the present invention to provide a hard disk drive device which solves the above problems.

[0011]

It is another object of the present invention to provide a head stack assembly which solves the above problems.

[0012]

[Summary of the Invention]

A head stack assembly for a data recording disk drive in accordance with the present invention comprises:

a carriage on which a coil is mounted, having a first surface and a second surface;

a first head gimbal assembly mounted on the first surface; and

a second head gimbal assembly mounted on the second surface;

wherein a datum member for positioning the first head gimbal assembly on the first surface and for positioning the second head gimbal assembly on the second surface is formed on each of the first surface and the second surface of the carriage.

[0013]

The datum member is two datum pins spaced from each other, and each of the first head gimbal assembly and the second head gimbal assembly has two apertures into which the two datum pins are inserted, respectively.

[0014]

The carriage has an aperture into which a pivot member is inserted, and the aperture is located between the two datum pins.

[0015]

A line passing through the two datum pins is inclined from a center line extending in a longitudinal direction of the head stack assembly.

[0016]

The total weight of the head stack assembly is balanced at a center of the pivot member.

[0017]

A head stack assembly for a data recording disk drive in accordance with the present invention comprises:

a carriage on which a coil is mounted, having a first surface and a second surface;

a first head gimbal assembly mounted on the first surface; and

a second head gimbal assembly mounted on the second surface;

wherein the carriage has a first aperture into which a pivot member is inserted, and the diameter of the first aperture is larger than the diameter of the pivot member, each of the first head gimbal assembly and the second head gimbal assembly has a second aperture, the center of which is aligned to the center of the first aperture, the diameter of the second aperture is larger than the diameter of the pivot member, the second aperture has a V shaped edge for aligning the pivot member, and a portion of the carriage is extruded into the first aperture, and the portion extruded from the carriage pushes the pivot member to the V shaped edge of the second aperture when the pivot member is inserted into the second aperture and the first aperture.

[0018]

The V shaped edge is formed to align the center of the pivot member to a center line extending in a longitudinal direction of the head stack assembly.

[0019]

The total weight of the head stack assembly is balanced at a center of the pivot member.

[0020]

Material of the carriage is plastic resin, and material of the first and second head gimbal assemblies is metal.

[0021]

A head stack assembly for a data recording disk drive in accordance with the present invention comprises:

a carriage on which a coil is mounted, including a first surface and a second surface and having a first aperture into which a pivot member is inserted, wherein the diameter of the first aperture is larger than the diameter of the pivot member;

a first head gimbal assembly mounted on the first surface; and

a second head gimbal assembly mounted on the second surface;

wherein two datum pins for positioning the first head gimbal assembly on the first surface and for positioning the second head gimbal assembly on the second surface are formed on each of the first surface and the second surface of the carriage;

wherein each of the first head gimbal assembly and the second head gimbal assembly includes a suspension load beam and an arm member, the suspension load beam has a rear portion, a bending portion and a front portion supporting a read/write head, and the arm member is stacked to the rear portion,

wherein the suspension load beam has two apertures into which the two datum pins are inserted, respectively, and the suspension load beam has a second aperture, the center of which is aligned to the center of the first aperture, the diameter of the second aperture is larger than the diameter of the pivot member, the second aperture has a V shaped edge for aligning the pivot member, and a portion of the carriage is extruded into the first aperture, and the portion extruded from the carriage pushes the pivot member to the V shaped edge of the second aperture when the pivot member is inserted into the second aperture and the first aperture.

[0022]

The first aperture is located between the two datum pins.

[0023]

A line passing through the two datum pins is inclined from a center line extending in a longitudinal direction of the head stack assembly.

[0024]

The total weight of the head stack assembly is balanced at a center of the pivot member.

[0025]

The V shaped edge is formed to align the center of the pivot member to a center line extending in a longitudinal direction of the head stack assembly.

[0026]

Material of the carriage is plastic resin, and material of the first and second head gimbal assemblies is metal.

[0027]

A head stack assembly for a data recording disk drive in accordance with the present invention comprises:

a carriage on which a coil is mounted, having a surface and a side wall vertical to the surface wherein a positioning pin is formed on the side wall and a positioning grooves extending from the side wall to an inside of the carriage is formed;

a head gimbal assembly mounted on the surface and supporting a read/write head; and

a flexible cable having a first portion, on which connecting pads connected to the read/write head are formed, a second portion, on which connecting pads connected to the coil are formed and a third portion from which the first portion and the second portion are branched;

wherein the first portion has an aperture and the second portion has a latch structure, the positioning pin is inserted into the aperture of the first portion and the latch structure

of the second portion is inserted along the positioning grooves to position the first portion along the side wall of the carriage.

[0028]

The carriage is provided with a guide member which includes a top portion parallel to the surface of the carriage and having one end coupled to the carriage and the other end, a side portion parallel to the side wall and having one end coupled to the other end of the top portion and the other end, and a support portion coupled between the other end of the side portion and the carriage.

[0029]

The first portion and the second portion of the flexible cable are positioned between the wall and the side portion.

[0030]

A wire positioning pin is formed on the side portion.

[0031]

A data recording apparatus in accordance with the present invention comprises:

a frame;

a data recording disk mounted on the frame; and

a head stack assembly pivoted on the frame, and having a front portion supporting a read/write head and a rear portion including a coil supporting frame;

wherein a first resilient member is extended along a first side surface of the coil supporting frame from the head stack assembly, and a second resilient member is extended along a second side surface of the coil supporting frame from the head stack assembly, and

wherein an inner crush stop member for engaging with the first resilient member and an outer crush stop member for engaging with the second crush stop member are formed on the frame.

[0032]

Material of the first and second resilient members is plastic resin.

[0033]

A data recording apparatus in accordance with the present invention comprises:

a frame;

a data recording disk mounted on the frame;

a head stack assembly pivoted on the frame by a pivot member, and having a front portion supporting a read/write head and a rear portion supporting a voice coil; and

a magnet mounted on the frame to apply a magnetic field to the voice coil;

wherein a the pivot member includes a washer made of a magnetic material and a fixing means for fixing the washer and the head stack assembly on the pivot member, the washer has a tab portion extended from the peripheral of the washer and the washer is fixed to the head stack assembly by the fixing means to position the tab portion to the nearest position to the magnet when the head stack assembly is stopped its outer most stop position.

[0034]

When the head stack assembly is stopped at the outer most position, the magnet and the tab portion generate a bias force for staying the head stack assembly at the outer most stop position.

[0035]

A data recording apparatus in accordance with the present invention comprises:

an electrically conductive frame;

a data recording disk mounted on the frame;

an electrically conductive head stack assembly pivoted on the frame by an electrically conductive pivot member and having a front portion supporting a read/write head and a rear portion supporting a voice coil, wherein the head stack assembly is electrically connected to the frame and the pivot member, and a

plurality of first connecting pads connected to the read/write head are formed on an insulating layer formed on the head stack assembly;

a control circuit mounted on the frame; and

a flexible cable for connecting the first connecting pads to the control circuit;

wherein a second connecting pad electrically connected to the head stack assembly is formed on the insulating layer, and the second connecting pad is electrically connected to a reference potential of the control circuit through the flexible cable.

[0036]

The head stack assembly includes a wiring plate which includes an electrically conductive supporting plate, an insulating layer, and the first and second connecting pads and electrically conductive wires formed on the insulating layer; the electrically conductive wires connect the first connecting pads to the read/write head and connect the second pad to the electrically conductive supporting plate.

[0037]

A head stack assembly for a data recording disk drive in accordance with the present invention comprises:

a carriage mounted with a coil; and

a head gimbal assembly mounted on a surface of the carriages;

wherein a datum member for positioning the head gimbal assembly on the surface is formed on the surface.

[0038]

A head stack assembly for a data recording disk drive in accordance with the present invention comprises:

a plurality of carriages each of which has a first surface and a second surface;

a first head gimbal assembly mounted on the first surface of each of the plural carriages; and

a second head gimbal assembly mounted on the second surface of each of the plural carriages;

wherein a datum member for positioning the first head gimbal assembly on the first surface and for positioning the second head gimbal assembly on the second surface is formed on each of the first surface and the second surface of each of the plural carriages.

[0039]

[Description of Embodiment]

Fig.3 shows a structure of the hard disk drive device 31 of the small size, such as the 27 mm (1.0 inches hard disk) form factor, in accordance with the present invention. Major parts, such as a hard disk 32, a head stack assembly 33, a magnet 34, an outer crush stopper 35 which is an extended portion of a metal frame of a housing 39, an inner crush stopper 36 which is

an extended portion of the metal frame of the housing 39, a flexible cable 37 and a control unit 38 mounted on the flexible cable 37, are mounted within the housing 39.

[0040]

A first member 46 and a second member 46 are extended from a carriage 48 made of a plastic resin of the head stack assembly 33, as shown in Figs.4 and 6. The first member 46 engages with the inner crash stopper 36 when the head of the head stack assembly 33 is positioned on the inner most data recording track of the hard disk 32. The second member 47 engages with the outer crash stopper 35 when the front tab 44 of the head stack assembly 33 rest on the ramp element 45 and the head is positioned on a stand by position, i.e. the outer most position. The first and second members 46 and 47 has a flexibility since they are an elongated bar like member made of the plastic resin, so that the first and second members 46 and 47 operate as a damper absorbing a shock when the member 46 or 47 engages with the respective crash stopper, whereby it is possible to use the inner and outer crash stoppers 36 and 35 made of the metal integrally made with the frame of the hard disk drive device 31. In this manner, the present invention solves the second problem described before.

[0041]

As described before, the 27 mm form factor represents the outer size of the housing 39, i.e. length L of $42.80 \text{ mm} \pm 0.10\text{mm}$, a width W of $36.40 \text{ mm} \pm 0.15\text{mm}$ and a height of 5mm (max). The hard disk 32 is supported by a shaft 40 which is rotated by a spindle motor, not shown. The head stack assembly 33 is pivotally moved around a pivot point or pivot cartridge 42. The

pivot carriage 42 includes bearing assemblies 30, as shown in Fig.10. A voice coil 41 is mounted on the head stack assembly 33. The voice coil 41 and the magnet 34 constitute a voice coil motor. A current supplied to the voice coil 41 is controlled to move the head stack assembly 33 along a radial direction indicated by an arrow "A" of the hard disk 32 to position a head on a head slider assembly 43 on a data recording track on the hard disk 32 to read data from the data recording track or to write the data into the data recording track. It is noted that the head/slider assembly 43 is shown in an enlarged shape in the Fig.3. Electrical conductive wires on the flexible cable 37 connect the head and the voice coil 41 to the control unit 38.

[0042]

Fig.4 shows the various parts of the head stack assembly (HSA) 33 in accordance with the present invention. In the head stack assembly 33, a first head gimbal assembly 49A is mounted on an upper or a first surface of the carriage 48, and a second head gimbal assembly 49B is mounted on a lower or a second surface of the carriage 48. The data recording disk or the hard disk 32 is located between the head gimbal assembly 49A and the head gimbal assembly 49B. For simplifying the drawing, the hard disk 32 is not shown in the Fig.4. The flexible cable 37 is mounted on the side wall of the carriage 48. The head gimbal assembly 49A, the carriage 48 and the head gimbal assembly 49B are fixed by the pivot cartridge 42, a washer 50 and a nut 51.

[0043]

The head stack assembly 33 assembled by using an improved datum system, in accordance with the present invention, for precisely

positioning the head gimbal assemblies 49A and 49B and the voice coil 41 to the carriage 48 is described with reference to Figs.5 and 6. The Fig.5 shows a plan view in a X-Y plane of the upper head gimbal assembly 49A, the carriage 48 and the lower head gimbal assembly 49B. The Fig.6 shows a plane view in the X-Y plane of the parts of the upper head gimbal assembly 49A and the carriage 48. Referring to the Fig.6, the upper head gimbal assembly (HGA) 49A includes an arm member 52A, a suspension load beam 53A and an integrated wiring plate 54A. A center line CL_1 extends in a longitudinal direction of the head stack assembly 33. An aperture 55, a center of which is aligned to the center line CL_1 , is formed in the carriage 48. The dashed circle line 42 represents the outer surface of the pivot cartridge 42 shown in the Fig.4. An extended portion 56 of the carriage 48 is formed in the aperture 55. A front end of the extended portion 56 engages with the outer surface of the pivot cartridge 42 to guide the pivot cartridge 42 in a correct position, as described later, when the upper head gimbal assembly 49A, the carriage 48, the lower head gimbal assembly 49B and the pivot cartridge 42 are assembled, as shown in the Figs.5, 6 and 7..

[0044]

In the following description, only the structure of the upper or first head gimbal assembly 49A is described, since the structure of the lower or second head gimbal assembly 49B is substantially the same as that of the assembly 49A. The same reference number is assigned to the same parts of the head gimbal assemblies 49A and 49B, wherein the character "A" after the reference number represents the part of the upper head gimbal assembly 49A and the character "B" after the reference

number represents the part of the lower head gimbal assembly 49B.

[0045]

(Description of the carriage 48):

The carriage 48 is made of plastic resin, such as polyester resin. The carriage 48 has the first element 46, the second element 47 and a frame portion 28 for supporting the voice coil 41. Since the first and second members 46 and 47 are extended from the plastic carriage 48 along a first side surface 28A and the second side surface 28B of the frame member 28 for supporting the voice coil 41 and have elongated shape, both the first and second members 46 and 47 have a resilience or the flexibility. Further, the carriage 48 is provided with the following datum features shown in the Figs.6 and 7.

[0046]

The Fig.7 shows a cross section of the head stack assembly 33 along a line 60 shown in the Fig.6. As shown in the Fig.7, a datum member, which includes (A) a datum pin or a datum member 57A operating as a first datum feature or a first datum point and (B) a datum pin or a datum member 58A operating as a second datum feature or a second datum point for aligning the upper head gimbal assembly 49A on the carriage 48; is formed on the first surface, i.e. the upper surface, of the carriage 48, and a datum member, which includes (A) a datum pin or a datum member 57B operating as the first datum feature or the first datum point and (B) a datum pin or a datum member 58B operating as the second datum feature or the second datum point for aligning the lower head gimbal assembly 49B, is formed on the

other surface, i.e. the lower surface, of the carriage 48. Further, the carriage 48 is formed with an aperture 59. The carriage 48 is fabricated by a molding process well known in the art.

[0047]

(Description of the integrated wiring plate 54A):

The integrated wiring plate 54A is formed by three layers. The three layers are shown in Fig.15. It is noted that the Fig.15 shows a particular structure of a portion 68, described later, of the lower head gimbal assembly 49B shown in the Fig.5, and at this point of time, the Fig.15 is referred to describe the three layers. As shown in the Fig.15, the three layers are a supporting layer 63 made of stainless steel, an insulating layer 64 made of polyimide and an electrically conductive layer 65 made of copper. A head/slider assembly 43A is mounted on a flexure, not shown, formed on the front portion of the integrated wiring plate 54A, and a dimple 67A is formed on a surface of the suspension load beam 53A to face to the flexure which supports a head/slider assembly 43A. The dimple 67A supports the center of the back side surface of the flexure, so that the flexure and the head/slider assembly 43A can perform a gimbal type motion, as well known in the art. The read/write head, not shown, such as MR (Magnetoresistive) merged head, is attached on a front side of the head/slider assembly 43A near to the front tab 44A. The MR merged head contains a read element, a write element and four connecting pads, not shown. A first pair comprising two connecting pads is connected to the read element, and a second pair comprising the remaining two connecting pads is connected to the write element. Therefore, four connecting wires 69A and four connecting pads 66A are

formed on the integrated wiring plate 54A by etching the upper most copper layer 65 (Fig.15). An extended plate 95A cantilevers from one side edge of the integrated wiring plate 54A. The connecting pads 66A and the wires for connecting the pads 66A and the MR merged head are formed on the extended plate 95A. Since the three layers of the integrated wiring plate 54A is flexible, the extended plate 95A can flex in the Z direction. The center of the read/write head is aligned to the center line CL_1 of the integrated wiring plate 54A. The connection of the pads 66A to the flexible cable 37 is later described with reference to Fig.14.

[0048]

The integrated wiring plate 54A is fixed on the suspension load beam 53A to precisely align the center line CL_1 of the integrated wiring plate 54A to the center line CL_1 of the load beam 53A and to precisely keep a distance between the center of the pivot cartridge 42 and the MR head to a designed value L_1 , when the three parts, i.e. the integrated wiring plate 54A, the suspension load beam 53A and the arm member 52A are assembled.

[0049]

(Description of the suspension load beam 53A):

The suspension load beam 53A is made of resilient stainless steel. The suspension load beam 53A includes a rear portion, a bending portion defined by an aperture 70A and a front portion supporting a head/slider assembly 43A. Two apertures 71A and 72A, into which the datum pins 57A and 58A are inserted, respectively, are formed in the positions on the suspension load beam 53A to precisely align the center line CL_1 of the

suspension load beam 53A to the center line CL_1 of the carriage 48 and to precisely keep the distance between the center of the first aperture 55 of the carriage 48 and the MR head on the integrated wiring plate 54A to the designed value L_1 . A second aperture or a datum aperture 73A for precisely align the center of the pivot cartridge 42 to the center of the aperture 55 of the carriage 48, i.e. the pivot point of the head stack assembly 33 is formed on the suspension load beam 53A. The center of the aperture 73A is aligned to the center of the first aperture 55. The diameter of the aperture 73A is larger than the diameter of the pivot cartridge 42. The aperture 73A includes a V shaped edge 74A and a semicircular portion, the diameter of which is larger than the diameter of the pivot cartridge 42. An aperture 62A is formed on the suspension load beam 53A. The aperture 62A is formed to align to the aperture 59 on the carriage 48 when the datum pins 57A and 58A are fitted into the datum apertures 71A and 72A, respectively. An extended portion 75A is formed on one side edge of the suspension load beam 53A, and an aperture 76A is formed on the portion 75A. The diameter of the first aperture 55 is larger than the diameter of the pivot member or the pivot cartridge 42. The purpose for providing the extended portion 75A and the aperture 76A is later described with reference to Fig.8.

[0050]

(Description of the arm member 52A) :-

The arm member 52A is made of stainless steel, and the thickness of the arm member 52A is thicker than the thickness of the suspension load beam 53A. An aperture 76A, diameter of which is larger than the diameter of the pivot cartridge 42, is formed on the arm member 52A. Two apertures 77A and 78A, the

diameter of which are larger than the diameter of the datum apertures 71A and 72A are formed on the arm member 52A. The center of the apertures 77A and 78A are aligned to the center of the datum apertures 71A and 72A, respectively. The aperture 61A is formed to align to the aperture 59 on the carriage 48 when the arm member 52A is assembled on the suspension load beam 53A.

[0051]

(Description of the datum system):

In the following description, only the datum system for aligning the upper head gimbal assembly 49A is described for simplifying the description. And, the description about the datum system for the upper head gimbal assembly 49A is applicable to the lower head gimbal assembly 49B.

[0052]

It is noted that the present invention relates to the datum system for precisely aligning the head gimbal assemblies 49A and 49B, which are assembled in advance, and the voice coil 41 to the carriage 48. Therefore, it is assumed that the three parts, i.e. the integrated wiring plate 54A, the suspension load beam 53A and the arm member 52A have been assembled, in advance to form the head gimbal assembly 49A. In the assembled state, (a) the center lines CL_1 of all the three parts 52A, 53A and 54A are aligned to each other and (b) the distance between the center 27 of the aperture 73A, which is later aligned to the center of the pivot cartridge 42, and the MR merged head is the designed value L_1 .

[0053]

(Description of the datum pins 57A and 58A on the carriage 48):

The first datum pin 57A, the second datum pin 58A and the aperture 55 are so formed on the carriage 48 that the aperture 55, through which the pivot cartridge 4 is located, is located between the first datum pin 57A and the second datum pin 58A, as shown in the Fig.6. And, the line 60 passing through the centers of the first and second datum pins 57A and 58A is inclined from the center line CL_1 of the head stack assembly 33 by an angle α_1 as shown in the Fig.6. In other words, the center line CL_1 is defined by shifting or rotating the line 60 by the angle α_1 in a counter clockwise direction.

[0054]

(Description of the total weight of the HSA 33):

Since the total weight of the completed head stack assembly (HSA) 33 of the present invention is balanced at the rotating center of the pivot cartridge 42 which is located on the center line CL_1 , the total weight is described. The total weight of the head stack assembly 33 is a sum of:

- (A) the weight of the carriage 48;
- (B) the weight of a portion 119 (shown in the Fig.11) of the flexible cable 37;
- (C) the weight of solder for bonding the connecting pads 66A and 66B to the connecting pads 112 and 113 of the flexible cable 37, as shown in Fig.14;
- (D) the weight of the head gimbal assemblies 49A and 49B, wherein the assemblies 49A and 49B have the same structure and weight, and one of the assemblies, for example the assembly

49A, includes the arm member 52A, the suspension load beam 53A and the integrated wiring plate 54A; and
(E) the weight of the voice coil 41.

[0055]

(Description of the alignment of the voice coil 41 to the carriage 48):

The voice coil 41 is inserted into the space defined by the frame portion 28. The center line of the voice coil 41 is represented by the line CL_2 . The total weight of the voice coil 41 is balanced at the center line CL_2 . The center line CL_2 of the voice coil 41 is shifted from the center line CL_1 of the carriage 48 by an angle α_2 to balance the total weight of the completed head stack assembly 33 at the rotating center of the pivot cartridge 42 which is located on the center line CL_1 .

[0056]

(Description of the alignment of the HGA 49A to the carriage 48):

As described before, the two apertures 71A and 72A, into which the datum pins 57A and 58A are inserted, respectively, are formed on the suspension load beam 53A. It is noted that these two apertures 71A and 72A on the suspension load beam 53A are used to align the head gimbal assembly 49A to the carriage 48. More particularly, the diameter of the apertures 77A and 78A on the arm member 52A is larger than the diameter of the datum pins 57A and 58A, so that the datum pins 57A and 58A engage with the apertures 71A and 72A of the suspension load beam 53A, respectively, as shown in the Fig.7. In this manner, the center

line CL₁ of the head gimbal assembly 49A, to which the center of the read/write head is aligned to the center line CL₁ of the carriage 48.

[0057]

(Description of the mount of the HGAs 49A and 49B on the carriage 48):

Fig.8 shows a separator 79 inserted between the head gimbal assembly 49A and the head gimbal assembly 49B. When both the head gimbal assemblies 49A and 49B are mounted on the upper surface and the lower surface of the carriage 48, respectively, as shown in the Fig.7, the separator 79 having two extruded portions 90A and 90B formed is inserted between the extended portion 75A of the suspension load beam 53A and the extended portion 75B of the suspension load beam 53B to prevent the two MR heads supported on the head gimbal assemblies 49A and 49B from colliding each other during the assembling process of the head gimbal assemblies 49A and 49B on the carriage 48, as shown in the Fig.8(A) and (B). The aperture 76A of the extended portion 75A engages with the extruded portion 90A, and the aperture 76B of the extended portion 75B of the suspension load beam 53B engages with the extruded portion 90B.

[0058]

(Description of the tack of the HGAs 49A and 49B on the carriage 48):

Fig.9 shows the tacking operation of the head gimbal assemblies (HGAs) 49A and 49B on the carriage 48. The tacking operation is performed before the insertion of the pivot cartridge 42. A

tacking pin 92 made of plastic resin is inserted through the aperture 61A of the arm member 52A, the aperture 62A of the suspension load beam 53A, the aperture 59 of the carriage 48, the aperture 62B of the suspension load beam 53B and the aperture 61B of the arm member 52B, as shown in the Fig.9(A). Next, the top portion and the bottom portion of the tacking pin 92 is pressed by the force and heat applied in the direction of arrows 91A and 91B, so that the head gimbal assemblies 49A and 49B are tacked to the carriage 48, as shown in the Fig.9(B).

[0059]

(Description of the alignment of the pivot cartridge 42 to the HSA 33):

After that the head gimbal assemblies 49A and 49B are tacked on the carriage 48, the pivot cartridge 42 is inserted through the aperture 76A of the arm member 52A, the aperture 73A of the suspension load beam 53A, the aperture 55 of the carriage 48, the aperture 73B of the suspension load beam 53B and the aperture 76B of the arm member 52B, as shown in the Fig.7. The V shaped edge 74A and 74B of the apertures 73A and 73B of the suspension load beams 53A and 53B and the extruded portion 56 of the carriage 48 are used as the datum points for aligning the center of the pivot cartridge 42 to the pivot point of the head stack assembly 33 on the center line CL_1 . Next, the alignment of the center of the pivot cartridge 42 to the pivot point of the head stack assembly 33 is described with reference to the Figs.5, 6 and 10.

[0060]

The Fig.10 shows the cross section of the head stack assembly 33 and the frame 93 of the hard disk drive device 31 along a line A-A shown in the Figs.5 and 6. The extruded portion 56 of the carriage 48 has the flexibility since it is made of the plastic resin. And, the size of the extended portion 56 is so designed that the extended portion 56 deforms and pushes the pivot cartridge 42 to the V shaped edge 74A when the extended portion 56 engages with the outer surface of the pivot cartridge 42. Therefore, when the pivot cartridge 42 is inserted, the extruded portion 56 of the carriage 48 pushes the side wall of the pivot cartridge 42 to the V shaped edges 74A and 74B of the apertures 73A and 73B, as apparent from the Figs 5 and 6, so that the pivot cartridge 42 is aligned to the V shaped edge 74A and 74B which are the datum points. In this manner, the pivot cartridge 42 is supported by only five supporting points, i.e. the two supporting points on the V shaped edge 74A of the head gimbal assembly 49A, one supporting point on the extruded portion 56 of the carriage 48 and the two supporting points on the V shaped edge 74B of the head gimbal assembly 49B, whereby (1) the center lines CL_1 of the head gimbal assemblies 49A and 49B are aligned to the center of the pivot cartridge 42, and (2) the distance between the center of the pivot cartridge 42 and the MR head is the designed value L_1 . The pivot cartridge 42 includes a stud 29 which is fixed to the frame 93 by a screw 94, the outer surface portion 42S and bearing units 30 mounted between the stud 29 and the outer surface portion 42S.

[0061]

The reason for forming the datum apertures 71A and 72A and the datum aperture 73A on the suspension load beam 53A is that the distance between the center 27 of the aperture 73A (i.e. the

rotating center of the pivot cartridge 42) and the MR head has been defined as the designed value L_1 , and the center of the MR head has been aligned to the center line CL_1 of the suspension load beam 53A.

[0062]

(Description of the electrical connection):

The connection of the flexible cable 37 to the carriage 48 is described with reference to Figs.11, 12, 13 and 14. The Fig.11 shows the mount of the flexible cable 37 to the carriage 48. The Fig.12 shows the structure of the flexible cable 37. The Fig.13 shows the connection of wires of the voice coil 41 to the connecting pads on the flexible cable 37. The Fig.14 shows the connection of the connecting pads 66A of the upper head gimbal assembly 49A shown in the Fig.6 and the connecting pads 66B of the lower head gimbal assembly 49B shown in the Fig.5 to the connecting pads 112 and 113 on the flexible cable 37.

[0063]

A plan view of the flexible cable 37 is shown in the Fig.12(A). The flexible cable 37 is constituted by a first portion 101, a second portion 102, a third portion 103, a fourth portion 104, a fifth portion 105 and a sixth portion 106, as shown in the Figs.11 and 12.

[0064]

A positioning aperture 111, into which a positioning pin 98 on the carriage 48 is inserted, is formed on a front portion of the first portion 101. Four connecting pads 112, which are

connected to the four connecting pads 66A of the upper head gimbal assembly 49A shown in the Fig.6 by a soldering process, and five connecting pads 113, which are connected to the five connecting pads 66B of the lower head gimbal assembly 49B shown in the Fig.5 by the soldering process are formed on both the edges of the first portion 101.

[0065]

A latch portion or a latch structure 114 is formed on the front end of the second portion 102. Two connecting pads 115 are formed on the second portion 102. The electrically conductive connection wires are formed on the first, second, third and fourth portions 101, 102, 103 and 104 to connect the pads 112, 113 and 115 to the control unit 38 mounted on the surface of the fourth portion 104. For simplifying the drawing, a portion of the connection wires is shown in the Fig.12.

[0066]

The connecting pads 116 are formed on the surface of the sixth portion 106 to connect the control unit 38 to a control card, not shown, mounted within the housing 39 of the hard disk drive device 31. Each of the portions of the flexible cable 37 shown in the Fig.12(A) is folded along dashed lines 107, 108, 109 and 110 to form the structure shown in the Fig.12(B). That is, the first portion 101 is folded by 180 degrees to cause the back surface of the first portion 101 to touch the back surface of the second portion 102. The folded flexible cable 37 is positioned with respect to the carriage 48, as shown in the Fig.11.

[0067]

The positioning pin 98 is formed on a side wall 118 which is vertical to the upper surface of the carriage 48. A guide member 99 is integrally formed on the carriage 48. The guide member 99 includes a top portion 99A parallel to the surface of the carriage 48 and having one end coupled to the carriage and the other end, a side portion 99B parallel to the side wall 118 and having one end coupled to the other end of the top portion 99A and a support portion 99C between the other end of the side portion 99B and the carriage 48. A wire positioning pin 100 is formed on the outer surface of the side portion 99B. Two grooves 116 extending from the surface of the side wall 118 to the inside of the carriage 48 are formed on the carriage 48, and a recess 117 is formed in each of the grooves 116, as shown in the Figs.11 and 13. The second portion 102 of the flexible cable 37 is inserted into the grooves 116 through the guide member 99 until the latch portion 114 engages with the recesses 117 in the grooves 116, as shown in the Fig.13. The first portion 101 of the flexible cable 37 is positioned to extend along the side wall 118 of the carriage 48, and the positioning pin 98 is inserted into the positioning aperture 111. In this manner the first portion 101 and the second portion 102 are positioned between the side wall 118 and the side portion 99B, so that the flexible cable 37 is automatically fixed to the carriage 48. This automatic engagement of the flexible cable 37 to the carriage 48 solves the third problem described before.

[0068]

(Description of the connection of the voice coil 41 to the flexible cable 37):

As shown in the Fig.13, two electrically conductive wires 123 and 124 of the voice coil 41 are extended through a hole 125 on the side wall of the carriage 48. Front ends of the wires 123 and 124 are wrapped around the wire positioning pin 100, so that the two wires 123 and 124 are positioned on the connecting pads 115, respectively on the second portion 102 of the flexible cable 37. The plane of the second portion 102 is in the X-Z plane. And, the wires 123 and 124 are bonded on the connecting pads 115, respectively. The wires 123 and 124 are cut at portions A and B, and the cut portions are removed.

[0069]

(Description of the connection of the plate 95A to the flexible cable 37):

The Fig.14 shows the first portion 101 of the flexible cable 37 in the X-Z plane and the two extended plates 95A and 95B in the X-Y plane, viewed in a direction of an arrow 126 in the Fig.11. It is noted that each of the connecting pads 66A and 66B on the extended plates 95A and 95B are plated with solder 120, and before the stack of the head gimbal assemblies 49A and 49B on the carriage 48, the flexible cable 37 is attached on the side wall of the carriage 48. When the head gimbal assemblies 49A and 49B are positioned on the carriage 48 by using the datum system described before, the connecting pads 112 and 113 of the first portion 101 can precisely contact the solders pads 120 on the connecting pads 66A and 66B due to the movement of the extended plates 95A and 95B in the direction shown by arrows 122 based upon their compliance or flexibility. In this state, the head gimbal assemblies 49A and 49B are tacked on the carriage 48 by the tacking operation as described with respect to the Fig.9.

[0070]

Next, the solder pads 120 are reflowed to connect the connecting pads 66A to the connecting pads 112 and to connect the connecting pads 66B to the connecting pads 113, so that the MR heads on the head gimbal assemblies 49A and 49B are connected to the control unit 38 through the connecting wires on the integrated wiring plates 54A and 54B and the flexible cable 37. It is noted that the five connecting pads 66B including the left most pad 66BL are formed on the lower edge of the first portion 101. The pad 66BL is described below.

[0071]

(Description of the connection of the mechanical parts to the reference potential of the electrical circuit):

It is noted that the five connecting pads 66B are formed on the extended plate 95B of the lower head gimbal assembly 49B faced to one data recording surface of the hard disk, as shown in the Fig.5, while the four connecting pads 66A are formed on the extended plate 95A of the upper head gimbal assembly 49A faced to the other data recording surface of the hard disk, as shown in the Fig.6. One of the connecting pad, i.e. the pad 66BL, of the pads 66B on the extended plate 95B is connected to the mechanical parts included in the hard-disk drive device 31 through the portion 69 shown in the Fig.5.

[0072]

Fig.15 shows the cross section of the structure of the portion 68 shown in the Fig.5. As described before, each of the

integrated wiring plate 49A and 49B includes the three layers, i.e. the electrically conductive supporting layer 63 made of stainless steel, the insulating layer 64 made of polyimide and the electrically conductive layer 65 made of copper. The electrically conductive supporting layer 63 is electrically connected to the suspension load beam 53B and the arm member 52B. The suspension load beam 53B is electrically connected to the suspension load beam 53A through the pivot cartridge 42 made of electrically conductive material, as shown in the Fig.7. The electrically conductive pivot cartridge 42 is mounted on the electrically conductive frame member 93, as shown in the Fig.10.

[0073]

Referring to the Fig.15 again, at the portion 68, the copper layer 65 and the insulating layer 64 are removed to form a recess for exposing the supporting layer 63, and an electrically conductive material 127, such as silver, is deposited into the recess and the surface of the copper layer 65. Since the copper layer 65 extends to the connecting pad 66BL, as shown in the Fig.5, all the electrically conductive mechanical parts of the hard disk drive device 31 are connected to the reference potential of the electrical circuit to prevent an ESD (Electro Static Discharge) effect. The ESD effect means that if the mechanical parts are electrically floating from the reference potential of the circuit, electrostatic charges accumulate on the mechanical parts, and the MR heads are damaged by the discharge of the accumulated electrostatic charges.

[0074]

(Description of the operation of the washer 50):

Fig.16 shows the operation of the washer 50. The washer 50 has a tab or portion 128 extended from the peripheral of the washer. At least the tab portion 128 is made of a magnetic material, but both the washer 50 and the extended portion 128 can be made of the magnetic material. The washer 50 is fixed to the bottom surface of the arm member 52B of the lower head gimbal assembly 49B by the nut 51, as shown in the Fig.10, so that the extended or tab portion 128 is moved along with the head stack assembly 33. When the head stack assembly 33 is moved to the outer most stand by position on the ramp element 45 by the voice coil motor (VCM), which is constituted by the voice coil 41 and the magnet 34 fixed on the frame, the tab portion 128 of the magnetic material is positioned to the nearest position to the magnet 34, and is attracted by a leakage magnetic field of the magnet 34, and the magnet 34 and the tab portion 128 generates the bias force for staying the head stack assembly 33 at the outer most stop position.

[0075]

As well known in the art, when the power of the hard disk drive device is turned off, the head stack assembly 33 is automatically returned to the outer most stand by position on the ramp element 45 by the following automatic unload circuit. The term "unload" means the movement of the head stack assembly from the position on the hard disk to the stand by position on the ramp element. The automatic unload circuit includes a capacitor having a first terminal connected to the power supply and a second terminal connected to the reference potential, and a switching circuit connected between the first terminal of the capacitor and one terminal of the voice coil 41. When the

power is turned on, the switching circuit is turned off, and the capacitor is charged. When the power is turned off, the switching circuit is turned on, and the charges stored in the capacitor is supplied to the voice coil 41 to move the head stack assembly toward the stand by position. The bias force generated by the tab portion 128 and the magnet 34 of the present invention causes the head stack assembly to stay at the stand by position after the turn off of the power.

[0076]

The diameter of the wire of the voice coil 41 of the present invention can be very small, such as $73\text{ }\mu\text{m}$, to realize the resistivity of the wire equal to or larger than 14 ohms, so that a time constant of the coil 41 is sufficiently long to continuously flow the current during the turn off of the power, whereby the unload operation with a high reliability can be performed.

[0077]

As stated above, the bias force causes the MR head to stay at the outer most stand by position when the power of the hard disk drive device is turned off. The attraction force applied to the tab portion 128 by the magnet 34 is sufficiently keep the head stack assembly 33 at the stand by position during the turn off of the power, but is smaller than the driving force of the VCM for positioning the MR heads of the head stack assembly 33 along the radial direction of the hard disk 32 during the read/write operation. Therefore, the attraction force by the magnet 34 can be ignored during the read/write operation.

[0078]

(Description of the method for fabricating the hard disk drive device):

In a first step, the first portion 101, on which the connecting pads 112 and 113 are formed, of the flexible cable 37 is positioned on the side wall 118 of the carriage 48, as described with reference to the Figs.11 and 13. More particularly, the second portion 102 of the flexible cable 37 is inserted into the grooves 116 through the guide member 99 until the latch portion 114 engages with the recesses 117 in the grooves 116, as shown in the Fig.13. The first portion 101 of the flexible cable 37 is positioned to extend along the side wall 118 of the carriage 48, and the positioning pin 98 is inserted into the positioning aperture 111, so that the flexible cable 37 is automatically fixed to the carriage 48.

[0079]

In a second step, the first and second head gimbal assembly 49A and 49B are positioned on the carriage 48, and these are tacked by the tacking pin 92, as described with reference to the Fig.9.

[0080]

In a third step, the connecting pads 112 and 113 on the flexible cable 37 are connected to the connecting pads 66A and 66B on the extending plates 95A and 95B, respectively, and the voice coil wires 123 and 124 are bonded on the connecting pads 115, as described with reference to the Figs.11, 12 and 13.

[0081]

In a fourth step, the structure is cleaned to remove a residual flux or another contaminant by using a well known technology in the art.

[0082]

In a fifth step, the pivot cartridge 42 is inserted into the apertures 73A, 76A, 55, 76B and 73B, and the structure is fixed by the washer 50 and the nut 51, as described with reference to the Fig.4 or the Fig.10.

[0083]

In a sixth step, the structure is mounted on the frame 93 by the nut 94, as described with reference to the Fig.10.

[0084]

[Alternative embodiment]

Although the present invention has been described by using the embodiment of the data recording device, which includes one carriage 48 and two head gimbal assemblies 49A and 49B, the present invention can be applicable to the data recording device which includes one head stack assembly wherein only one head gimbal assembly is mounted on the carriage, and to the data recording device which includes a plurality of carriages wherein the head gimbal assemblies are mounted on each of the plural carriages. In the case that the plural carriages are used, the voice coil is mounted on one of the plural carriages.

[0085]

Although the discrete separate tacking pin 92 made of plastic resin is used to tack the head gimbal assemblies 49A and 49B on the carriage 48, as described with reference to the Fig.9, the pin can be integrally formed with the carriage 48.

[0086]

Fig.17 shows the alternative tacking operation of the head gimbal assemblies 49A and 49B on the carriage 48. The tacking pins 92A and 92B are integrally formed with the carriage 48 made of plastic resin. After the positioning of the head gimbal assemblies 49A and 49B on the carriage 48, the tacking pins 92A and 92B are pressed by the force and heat applied in the direction of arrows 91A and 91B, so that the head gimbal assemblies 49A and 49B are tacked to the carriage 48, as shown in the Fig.17.

[0087]

Fig.18(A) shows a cross section of the structure in which a spring type ring 134 is used in place of the nut 51 shown in the Fig.10. A block 133 represents the arm member 52A, the suspension load beam 53A, the carriage 48, the suspension load beam 53B and the arm member 52B shown in the Fig.10. The plan view and the side view of the spring type ring 134 are shown in the Fig.18(B). An inside wall 134A and a bottom surface of the spring type ring 134 are fitted into a recess formed on the side surface of the pivot cartridge 42, so that a top edge 134B of the spring type ring 134 pushes the washer 50 and the block 133 in a direction shown by an arrow 136, whereby the washer 50 and the block 133 is fixed to the pivot cartridge 42.

[0088]

Fig.19(A) shows a cross section of the structure in which a C type ring 135 is used in place of the nut 51 shown in the Fig.10. The plan view and the side view of the C type ring 135 are shown in the Fig.19(B). The C type ring 135 is fitted into a recess formed on the side surface of the pivot cartridge 42, so that the washer 50 and the block 133 is fixed to the pivot cartridge 42.

[0089]

[Meritorious effect of the Invention]

The present invention solves the various problems, as described before, caused in the case that the data recording device including the hard disk is miniaturized.

Brief Description of the Drawings:

Figure 1 shows a structure of a prior hard disk drive device.

Figure 2 shows a structure of the prior head stack assembly.

Figure 3 shows a structure of the hard disk drive device in accordance with the present invention.

Figure 4 shows the various parts of the head stack assembly in accordance with the present invention.

Figure 5 shows a plan view in a X-Y plane of the upper head gimbal assembly, the carriage and the lower head gimbal assembly.

Figure 6 shows a plane view in the X-Y plane of the parts of the upper head gimbal assembly and the carriage.

Figure 7 shows a cross section of the head stack assembly along a line 60 shown in the Fig.6.

Figure 8 shows a separator inserted between the head gimbal assembly 49A and the head gimbal assembly 49B.

Figure 9 shows the tacking operation of the HGAs 49A and 49B on the carriage.

Figure 10 shows the cross section of the head stack assembly and the frame of the hard disk drive device along a line A-A shown in the Figures 5 and 6.

Figure 11 shows the mount of the flexible cable to the carriage.

Figure 12 shows the structure of the flexible cable.

Figure 13 shows the connection of wires of the voice coil to the connecting pads on the flexible cable.

Figure 14 shows the connection of the connecting pads of the upper head gimbal assembly shown in the Figure 6 and the connecting pads of the lower head gimbal assembly shown in the Figure 5 to the flexible cable.

Figure 15 shows the cross section of the structure of the portion 68 shown in the Figure 5.

Figure 16 shows the operation of the washer.

Figure 17 shows the alternative tacking operation of the HGAs 49A and 49B on the carriage.

Figure 18 shows a cross section of the structure in which a spring type ring 134 is used in place of the nut 51 shown in the Figure 10.

Figure 19 shows a cross section of the structure in which a C type ring 135 is used in place of the nut 51 shown in the Figure 10.

[Description of symbols]

- 31 ... Hard disk drive device
- 32 ... Hard disk
- 33 ... Head stack assembly
- 34 ... Magnet
- 35 ... Outer crush stopper
- 36 ... Inner crush stopper
- 37 ... Flexible cable
- 41 ... Voice coil
- 42 ... Pivot cartridge
- 43 ... Head/slider assembly
- 45 ... Ramp element
- 46 ... First member
- 47 ... Second member
- 48 ... Carriage
- 49 ... Head gimbal assembly
- 50 ... Washer
- 51 ... Nut
- 52 ... Arm member

53 ... Suspension load beam
54 ... Integrated wiring plate
55, 59, 71, 72, 73, 76, 77, 78 ... Aperture
57, 58 ... Datum pin
63 ... Supporting layer
64 ... Insulating layer
65 ... Electrically conductive layer
66, 112, 115 ... Connecting pad
74 ... V shaped edge
93 ... Frame
95 ... Extended plate
99 ... Guide member
128 ... Extended portion

Claims:

(1) A head stack assembly for a data recording disk drive comprising:

a carriage on which a coil is mounted, having a first surface and a second surface;

a first head gimbal assembly mounted on said first surface; and

a second head gimbal assembly mounted on said second surface;

wherein a datum member for positioning said first head gimbal assembly on said first surface and for positioning said second head gimbal assembly on said second surface is formed on each of said first surface and said second surface of said carriage.

(2) A head stack assembly according to Claim 1, wherein said datum member is two datum pins spaced from each other, and each of said first head gimbal assembly and said second head gimbal assembly has two apertures into which said two datum pins are inserted, respectively.

(3) A head stack assembly according to Claim 2, wherein said carriage has an aperture into which a pivot member is inserted, and said aperture is located between said two datum pins.



(4) A head stack assembly according to Claim 3, wherein a line passing through said two datum pins is inclined from a center line extending in a longitudinal direction of said head stack assembly.

(5) A head stack assembly according to Claim 4, wherein the total weight of said head stack assembly is balanced at a center of said pivot member.

(6) A head stack assembly for a data recording disk drive comprising:

a carriage on which a coil is mounted, having a first surface and a second surface;

a first head gimbal assembly mounted on said first surface; and

a second head gimbal assembly mounted on said second surface;

wherein said carriage has a first aperture into which a pivot member is inserted, and the diameter of said first aperture is larger than the diameter of said pivot member, each of said first head gimbal assembly and said second head gimbal assembly has a second aperture, the center of which is aligned to the center of said first aperture, the diameter of said second aperture is larger than said diameter of said pivot member, said second aperture has a V shaped edge for aligning said pivot member, and a portion of said carriage is extruded into said first aperture, and said portion extruded from said carriage pushes said pivot member to said V shaped edge of said second aperture when said pivot member is inserted into said second aperture and said first aperture.



(7) A head stack assembly according to Claim 6, wherein said V shaped edge is formed to align the center of said pivot member to a center line extending in a longitudinal direction of said head stack assembly.

(8) A head stack assembly according to Claim 7, wherein the total weight of said head stack assembly is balanced at a center of said pivot member.

(9) A head stack assembly according to Claim 8, wherein material of said carriage is plastic resin, and material of said first and second head gimbal assemblies is metal.

(10) A head stack assembly for a data recording disk drive comprising:

a carriage on which a coil is mounted, including a first surface and a second surface and having a first aperture into which a pivot member is inserted, wherein the diameter of said first aperture is larger than the diameter of said pivot member;

a first head gimbal assembly mounted on said first surface; and

a second head gimbal assembly mounted on said second surface;

wherein two datum pins for positioning said first head gimbal assembly on said first surface and for positioning said second head gimbal assembly on said second surface are formed on each of said first surface and said second surface of said carriage;

wherein each of said first head gimbal assembly and said second head gimbal assembly includes a suspension load beam and an arm



member, said suspension load beam has a rear portion, a bending portion and a front portion supporting a read/write head, and said arm member is stacked to said rear portion,

wherein said suspension load beam has two apertures into which said two datum pins are inserted, respectively, and said suspension load beam has a second aperture, the center of which is aligned to the center of said first aperture, the diameter of said second aperture is larger than said diameter of said pivot member, said second aperture has a V shaped edge for aligning said pivot member, and a portion of said carriage is extruded into said first aperture, and said portion extruded from said carriage pushes said pivot member to said V shaped edge of said second aperture when said pivot member is inserted into said second aperture and said first aperture.

(11) A head stack assembly according to Claim 10, wherein said first aperture is located between said two datum pins.

(12) A head stack assembly according to Claim 10, wherein a line passing through said two datum pins is inclined from a center line extending in a longitudinal direction of said head stack assembly.

(13) A head stack assembly according to Claim 12, wherein the total weight of said head stack assembly is balanced at a center of said pivot member.

(14) A head stack assembly according to Claim 10, wherein said V shaped edge is formed to align the center of said pivot member to a center line extending in a longitudinal direction of said head stack assembly.



(15) A head stack assembly according to Claim 14, wherein material of said carriage is plastic resin, and material of said first and second head gimbal assemblies is metal.

(16) A head stack assembly for a data recording disk drive comprising:

a carriage on which a coil is mounted, having a surface and a side wall vertical to said surface wherein a positioning pin is formed on said side wall and a positioning grooves extending from said side wall to an inside of said carriage is formed;

a head gimbal assembly mounted on said surface and supporting a read/write head; and

a flexible cable having a first portion, on which connecting pads connected to said read/write head are formed, a second portion, on which connecting pads connected to said coil are formed and a third portion from which said first portion and said second portion are branched;

wherein said first portion has an aperture and said second portion has a latch structure, said positioning pin is inserted into said aperture of said first portion and said latch structure of said second portion is inserted along said positioning grooves to position said first portion along said side wall of said carriage.

(17) A head stack assembly according to Claim 16, wherein said carriage is provided with a guide member which includes a top portion parallel to said surface of said carriage and having one end coupled to said carriage and the other end, a side portion parallel to said side wall and having one end coupled



to said the other end of said top portion and the other end, and a support portion coupled between said the other end of said side portion and said carriage.

(18) A head stack assembly according to Claim 17, wherein said first portion and said second portion of said flexible cable are positioned between said wall and said side portion.

(19) A head stack assembly according to Claim 18, wherein a wire positioning pin is formed on said side portion.

(20) A data recording apparatus comprising:

a frame;

a data recording disk mounted on said frame; and

a head stack assembly pivoted on said frame, and having a front portion supporting a read/write head and a rear portion including a coil supporting frame;

wherein a first resilient member is extended along a first side surface of said coil supporting frame from said head stack assembly, and a second resilient member is extended along a second side surface of said coil supporting frame from said head stack assembly, and

wherein an inner crush stop member for engaging with said first resilient member and an outer crush stop member for engaging with said second crush stop member are formed on said frame.



(21) A data recording apparatus according to Claim 20, wherein material of said first and second resilient members is plastic resin.

(22) A data recording apparatus comprising:

a frame;

a data recording disk mounted on said frame;

a head stack assembly pivoted on said frame by a pivot member, and having a front portion supporting a read/write head and a rear portion supporting a voice coil; and

a magnet mounted on said frame to apply a magnetic field to said voice coil;

wherein a said pivot member includes a washer made of a magnetic material and a fixing means for fixing said washer and said head stack assembly on said pivot member, said washer has a tab portion extended from the peripheral of said washer and said washer is fixed to said head stack assembly by said fixing means to position said tab portion to the nearest position to said magnet when said head stack assembly is stopped its outer most stop position.

(23) A data recording apparatus according to Claim 22, wherein when said head stack assembly is stopped at said outer most position, said magnet and said tab portion generate a bias force for staying said head stack assembly at said outer most stop position.

(24) A data recording apparatus comprising:



an electrically conductive frame;

a data recording disk mounted on said frame;

an electrically conductive head stack assembly pivoted on said frame by an electrically conductive pivot member and having a front portion supporting a read/write head and a rear portion supporting a voice coil, wherein said head stack assembly is electrically connected to said frame and said pivot member, and a plurality of first connecting pads connected to said read/write head are formed on an insulating layer formed on said head stack assembly;

a control circuit mounted on said frame; and

a flexible cable for connecting said first connecting pads to said control circuit;

wherein a second connecting pad electrically connected to said head stack assembly is formed on said insulating layer, and said second connecting pad is electrically connected to a reference potential of said control circuit through said flexible cable.

(25) A data recording apparatus according to Claim 24, wherein said head stack assembly includes a wiring plate which includes an electrically conductive supporting plate, an insulating layer, and said first and second connecting pads and electrically conductive wires formed on said insulating layer; said electrically conductive wires connect said first connecting pads to said read/write head and connect said second pad to said electrically conductive supporting plate.



(26) A head stack assembly for a data recording disk drive comprising:

a carriage mounted with a coil; and

a head gimbal assembly mounted on a surface of said carriages;

wherein a datum member for positioning said head gimbal assembly on said surface is formed on said surface.

(27) A head stack assembly for a data recording disk drive comprising:

a plurality of carriages each of which has a first surface and a second surface;

a first head gimbal assembly mounted on said first surface of each of said plural carriages; and

a second head gimbal assembly mounted on said second surface of each of said plural carriages;

wherein a datum member for positioning said first head gimbal assembly on said first surface and for positioning said second head gimbal assembly on said second surface is formed on each of said first surface and said second surface of each of said plural carriages.



A DATA RECORDING DEVICE AND A HEAD STACK ASSEMBLY

Abstract

The present invention solves various problems caused by miniaturizing a data recording device including a hard disk drive device (31).

A head stack assembly (33) for a data recording disk drive (31) of the present invention comprises: a carriage (48) on which a coil (41) is mounted, having a first surface (28A) and a second surface (28B); a first head gimbal assembly (49A) mounted on the first surface (28A); and a second head gimbal assembly (49B) mounted on the second surface (28B); wherein a datum member (57A or 58A) for positioning the first head gimbal assembly (49A) on the first surface (28A) and for positioning the second head gimbal assembly (49B) on the second surface (28B) is formed on each of the first surface (28A) and the second surface (28B) of the carriage (48).

Fig 6

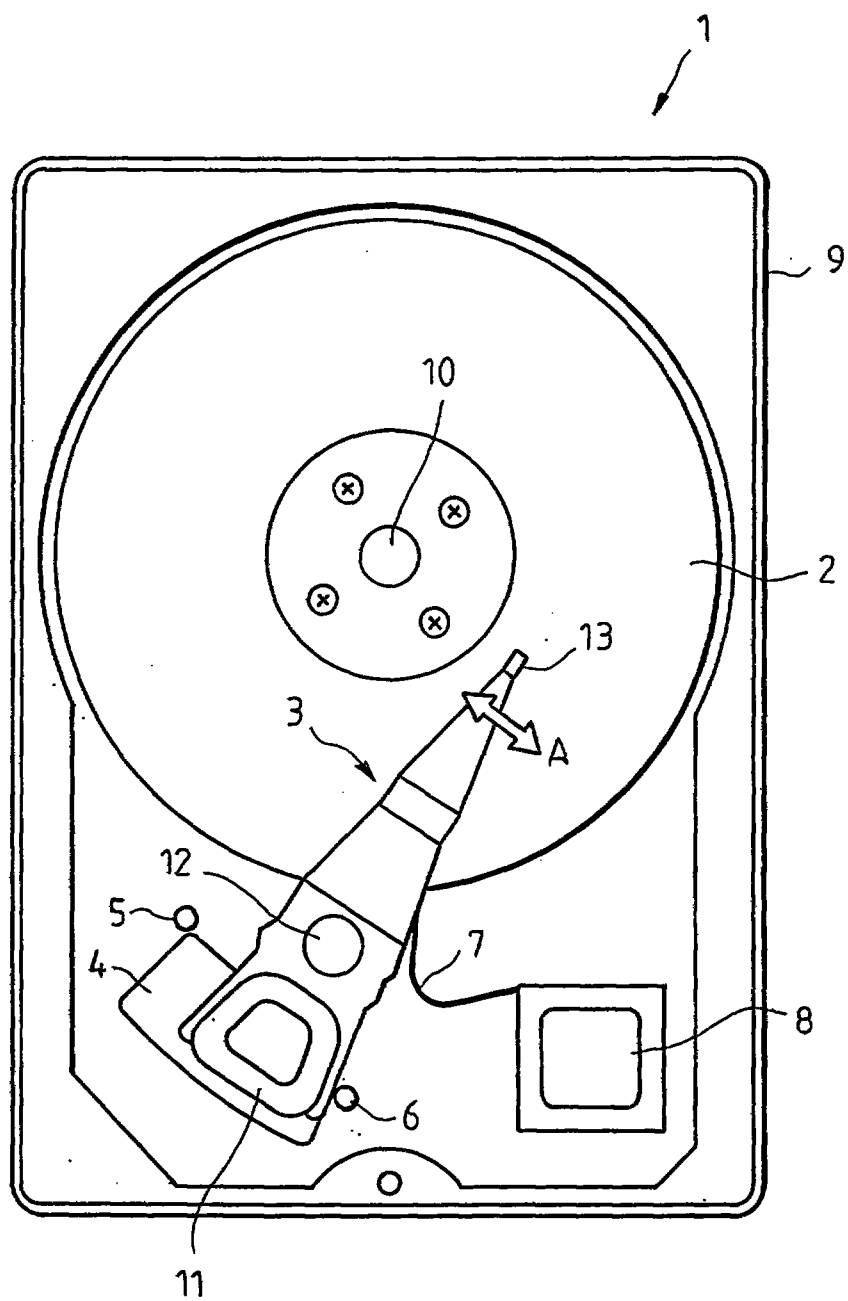


FIG. 1

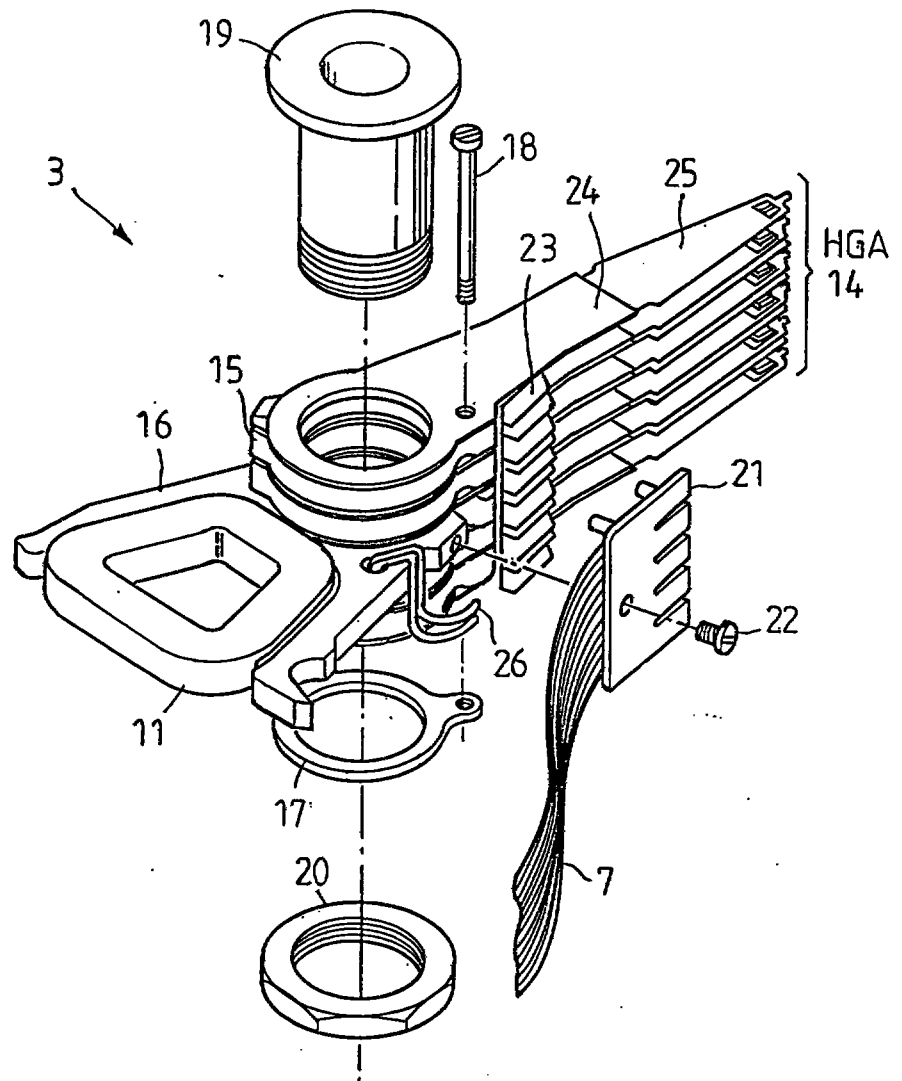


FIG. 2

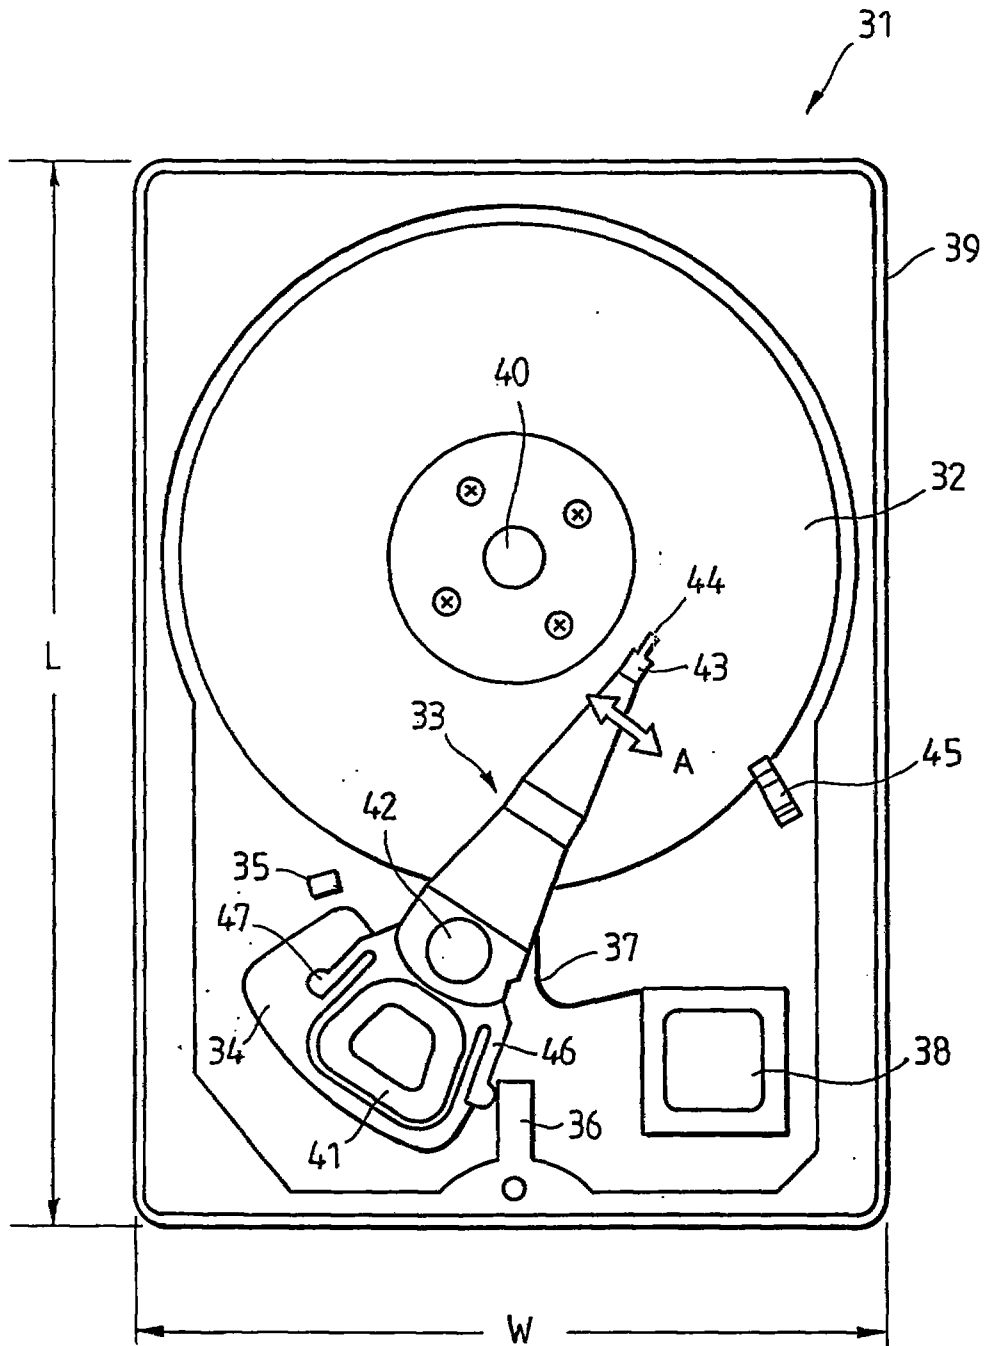


FIG. 3

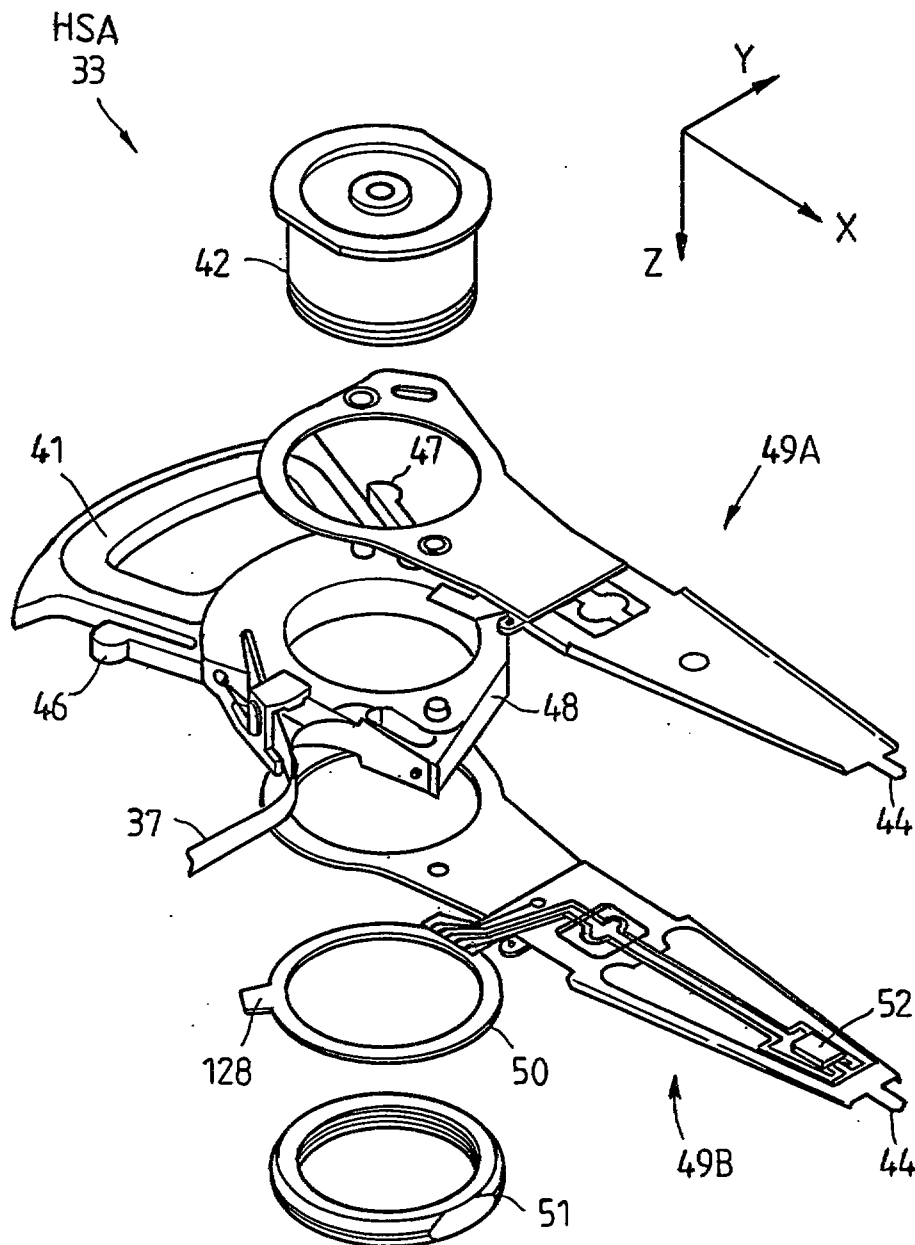


FIG. 4

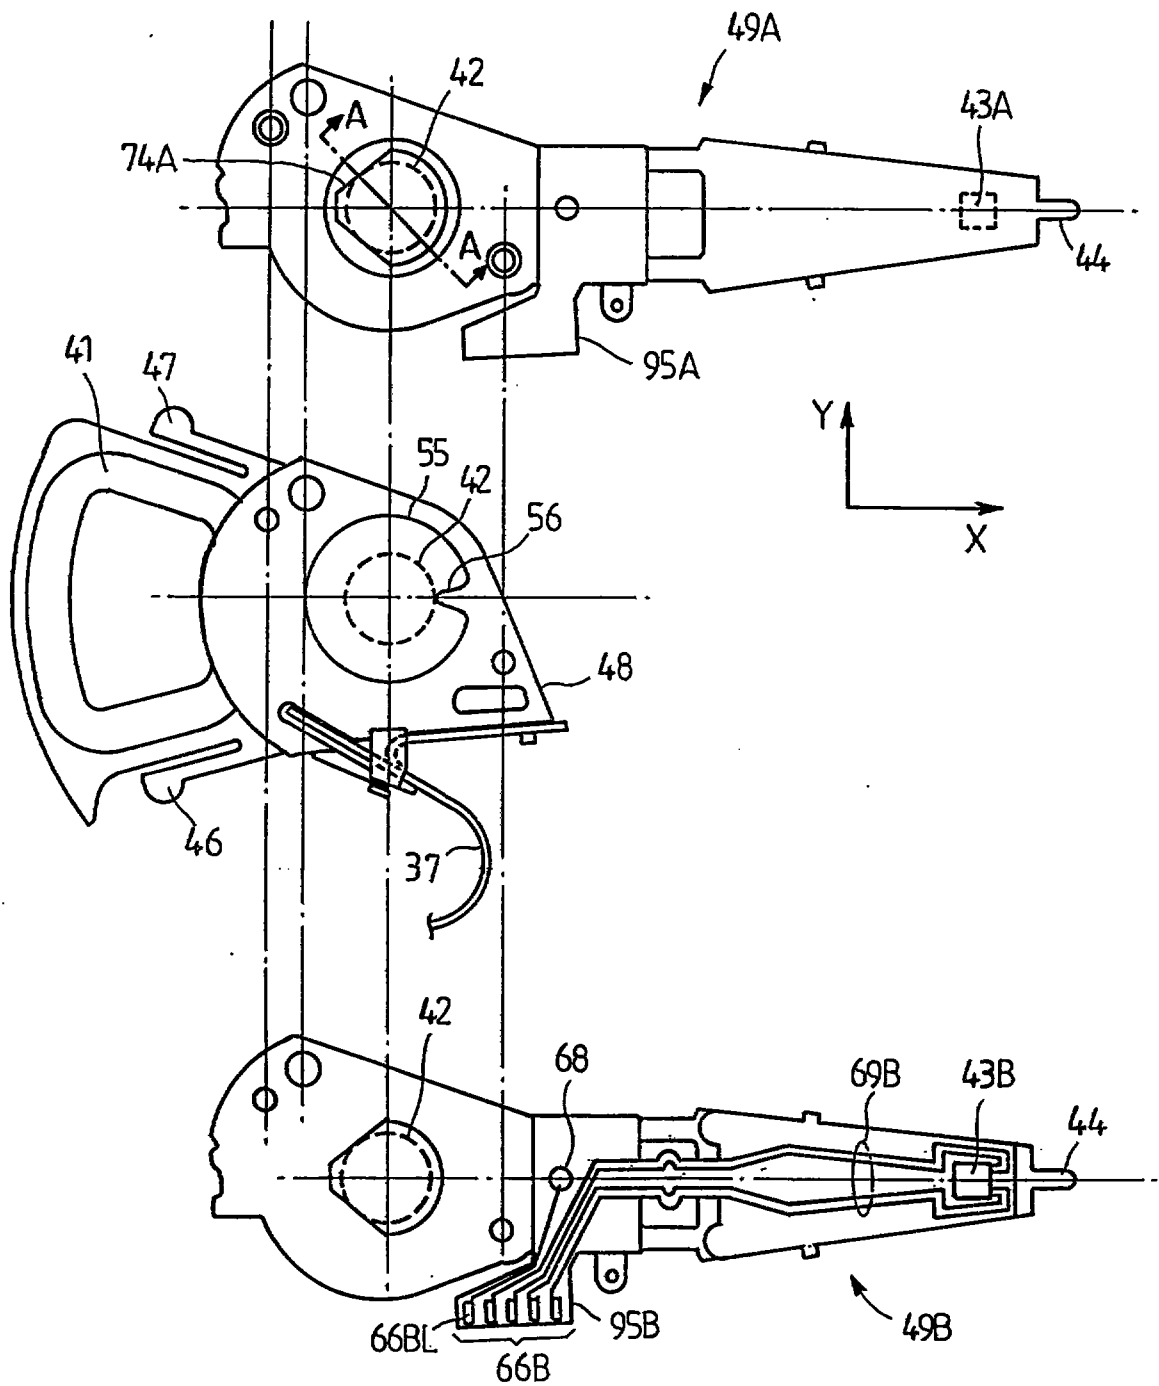


FIG. 5

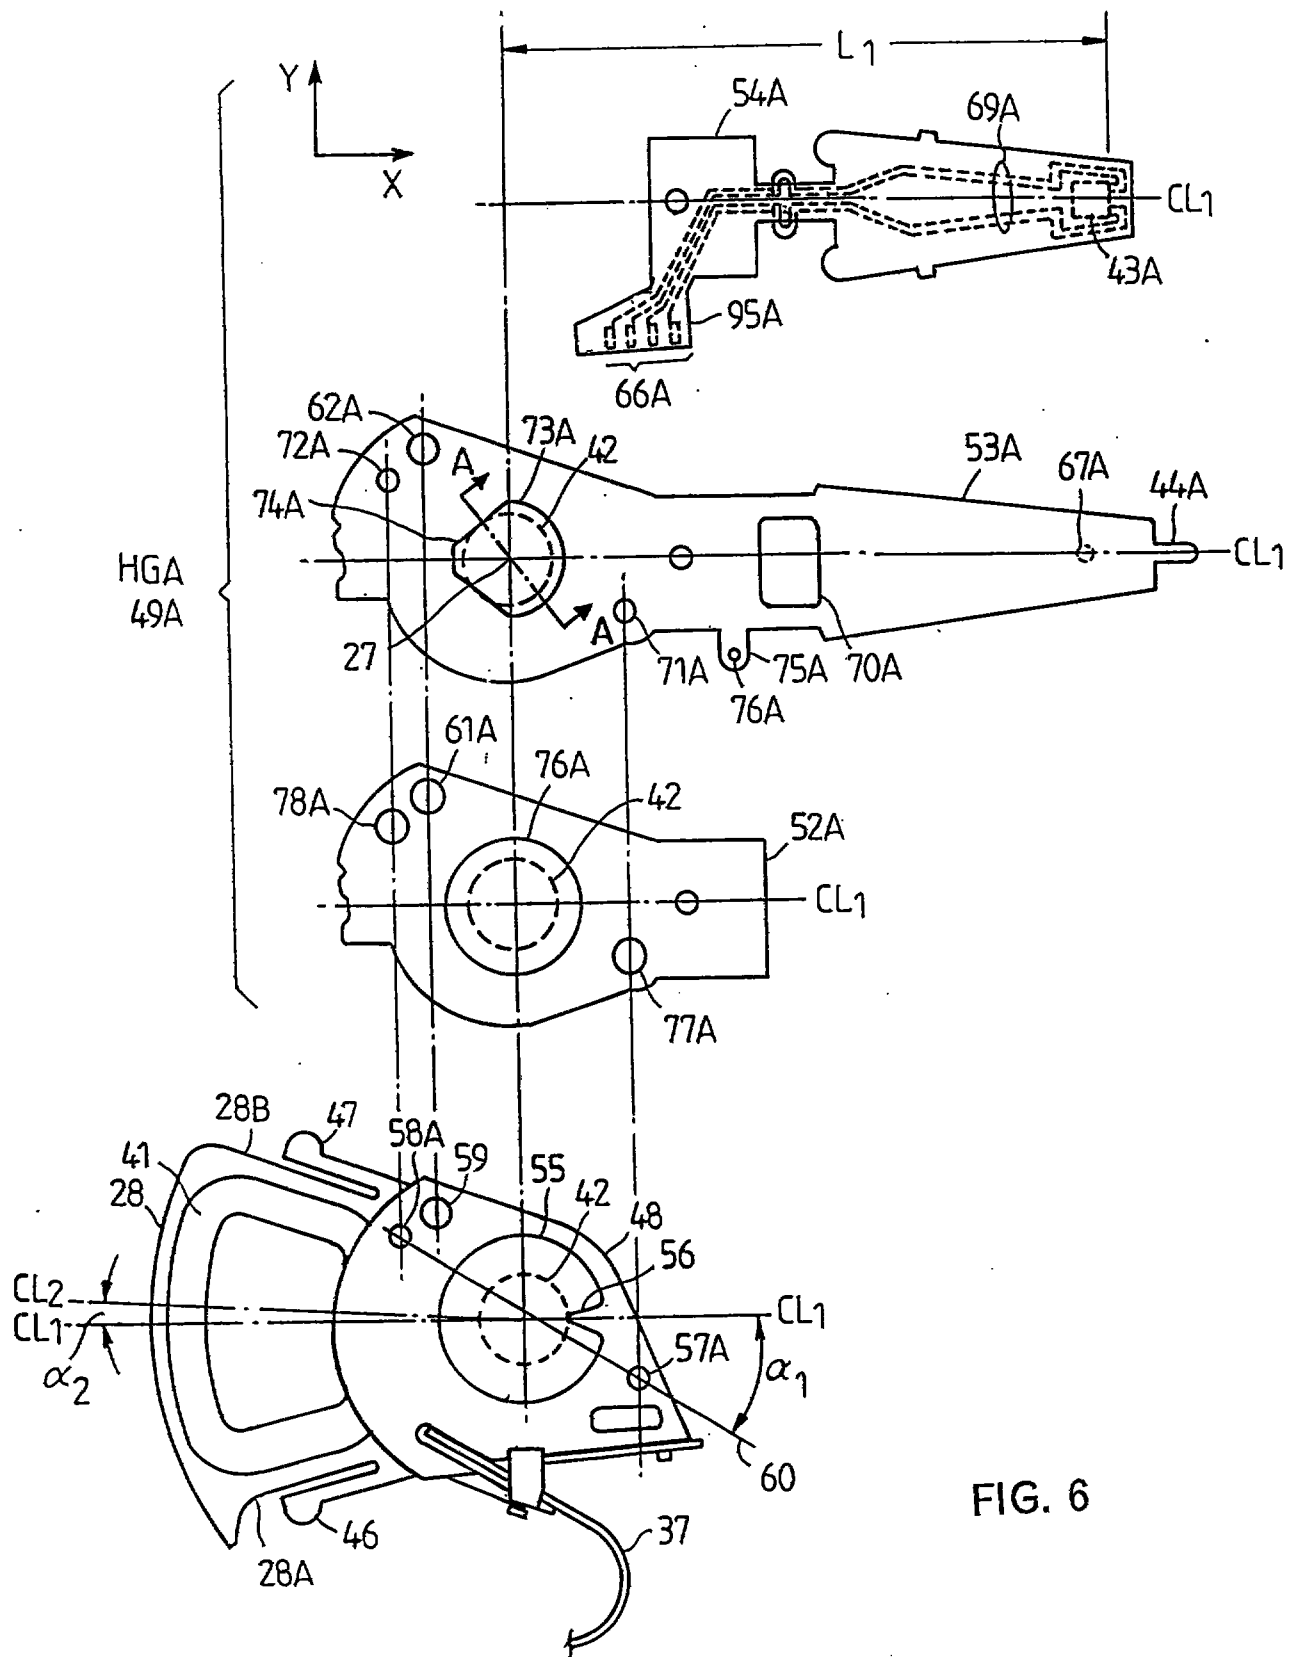


FIG. 6

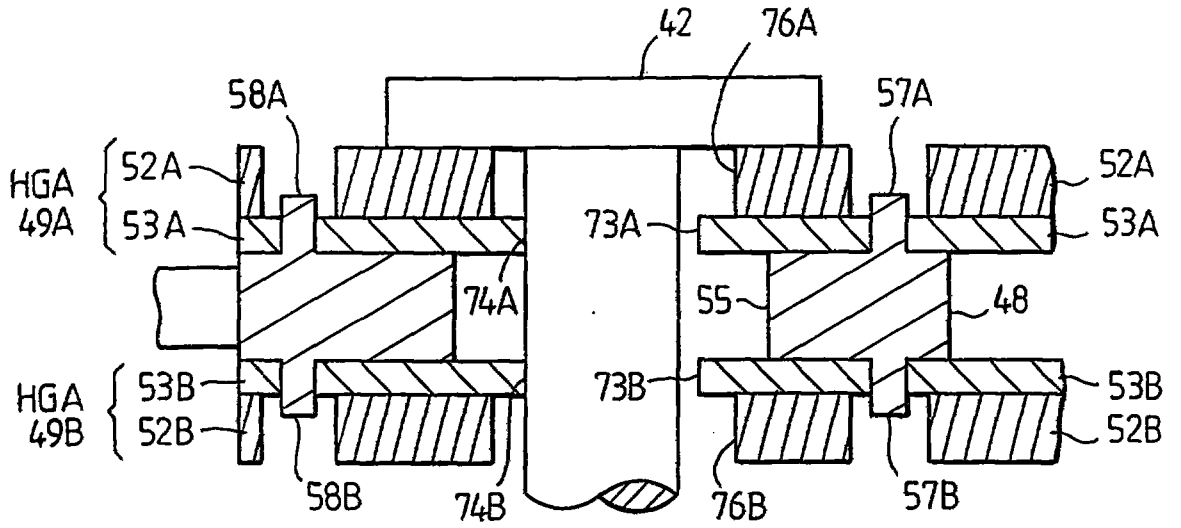


FIG. 7

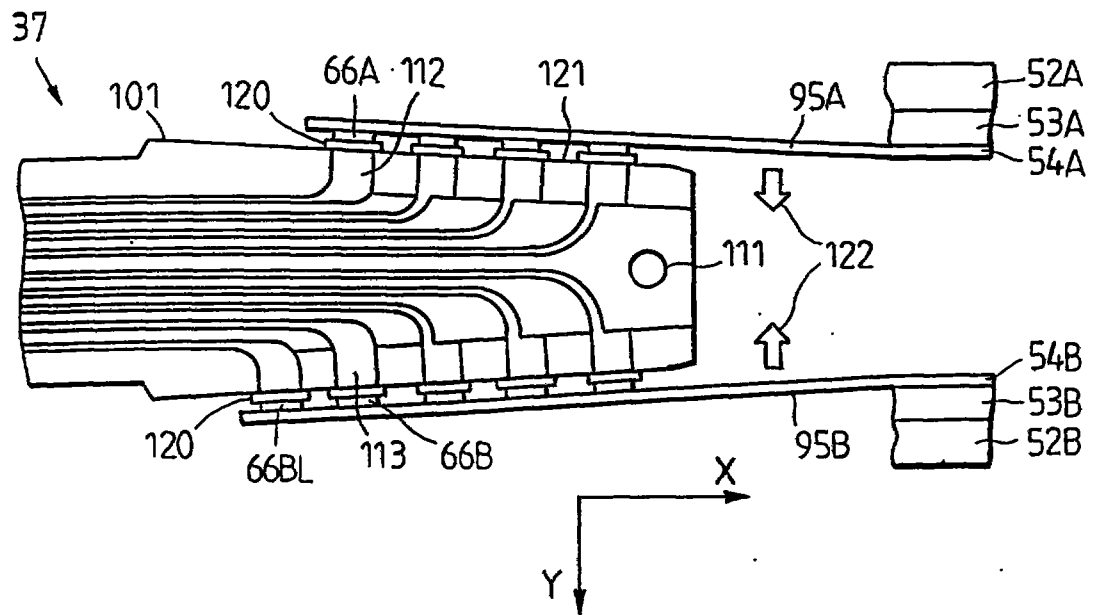


FIG. 14

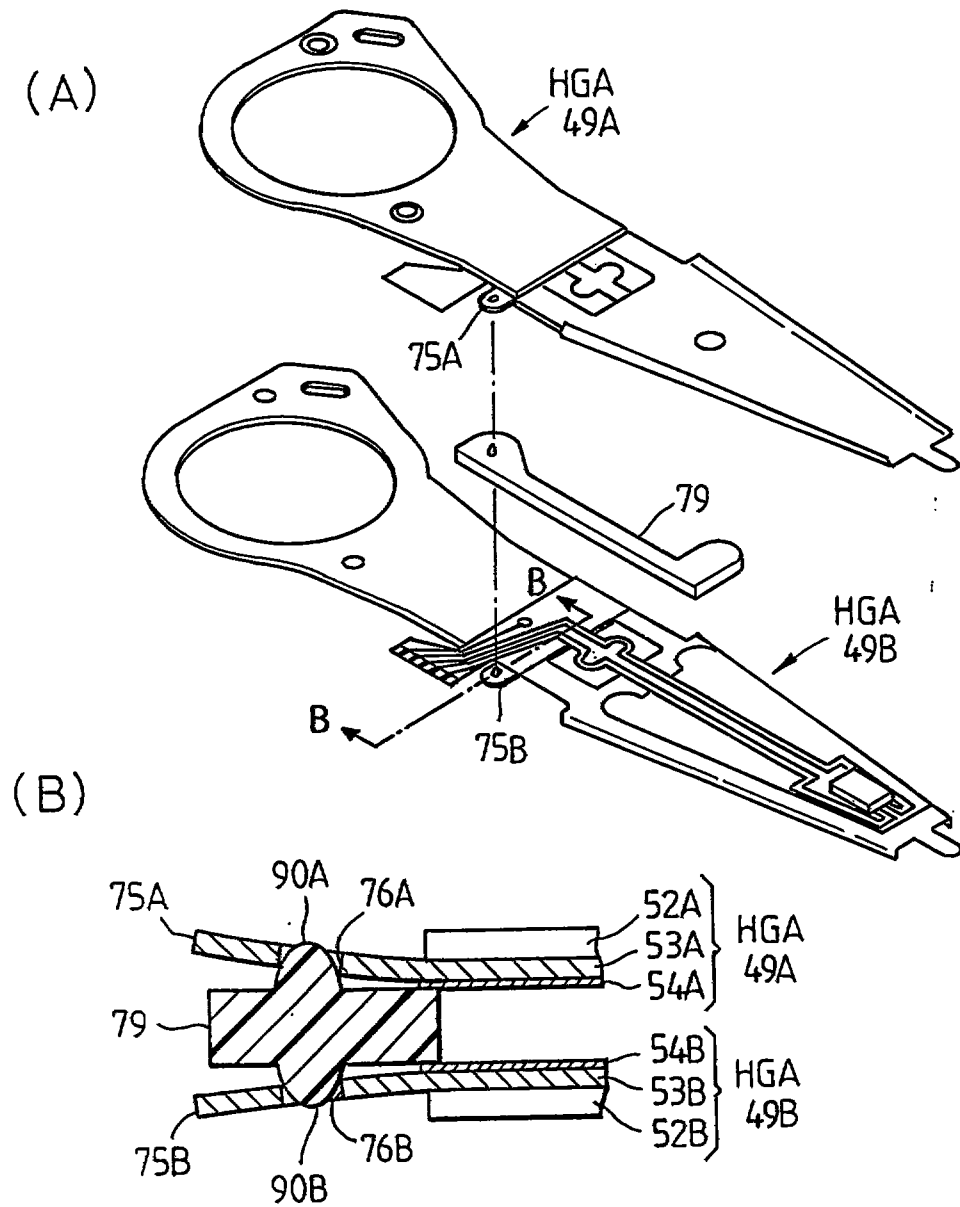


FIG. 8

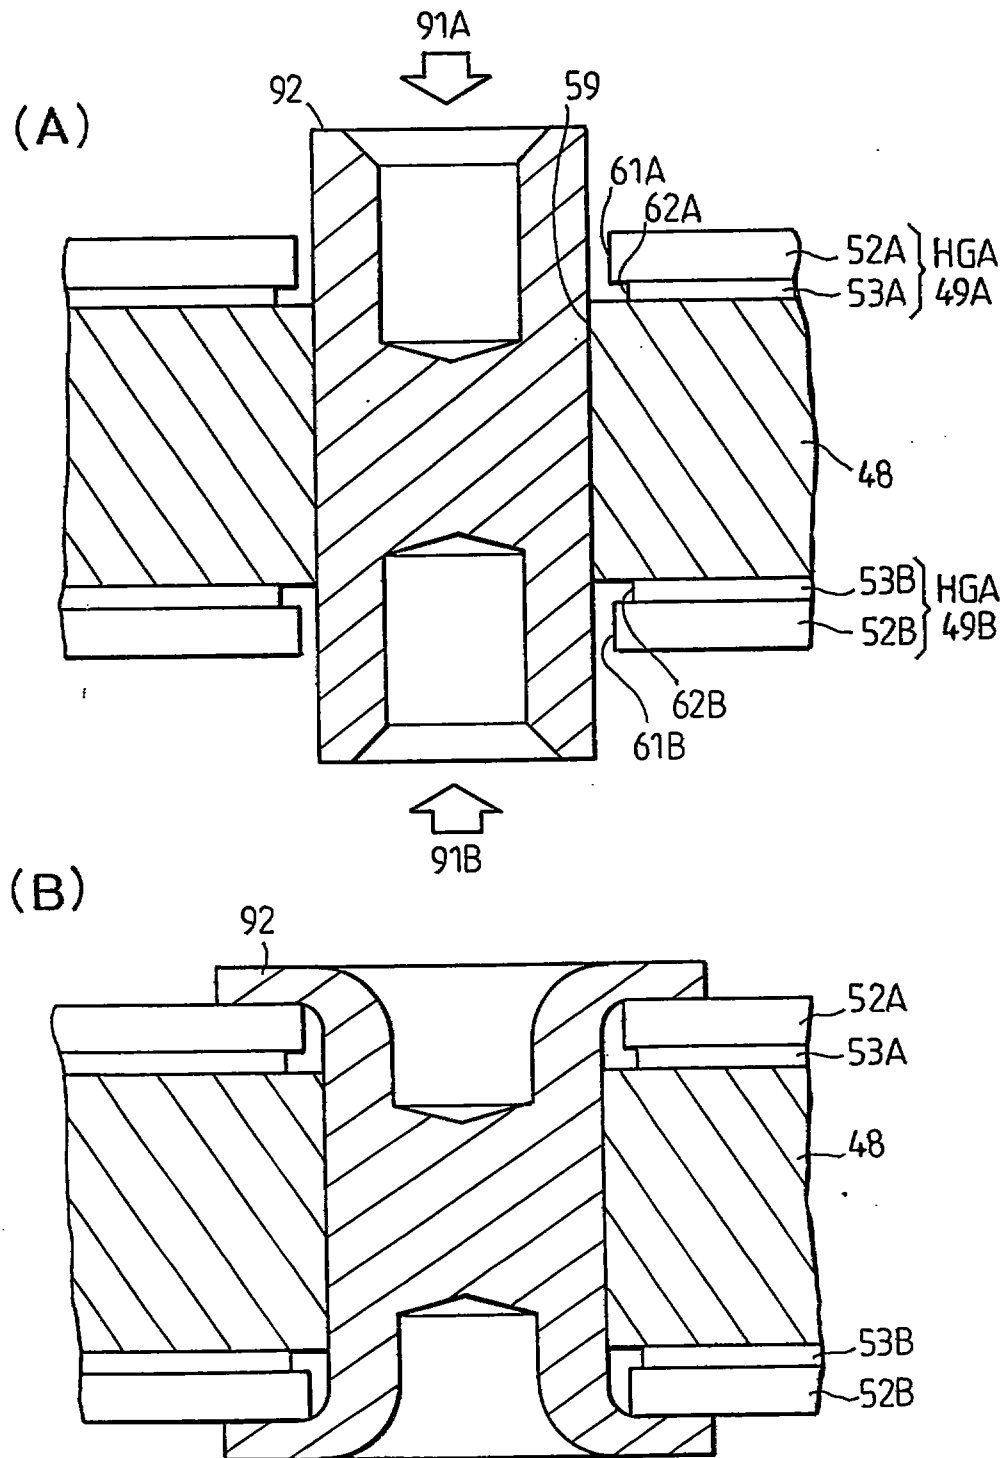


FIG. 9

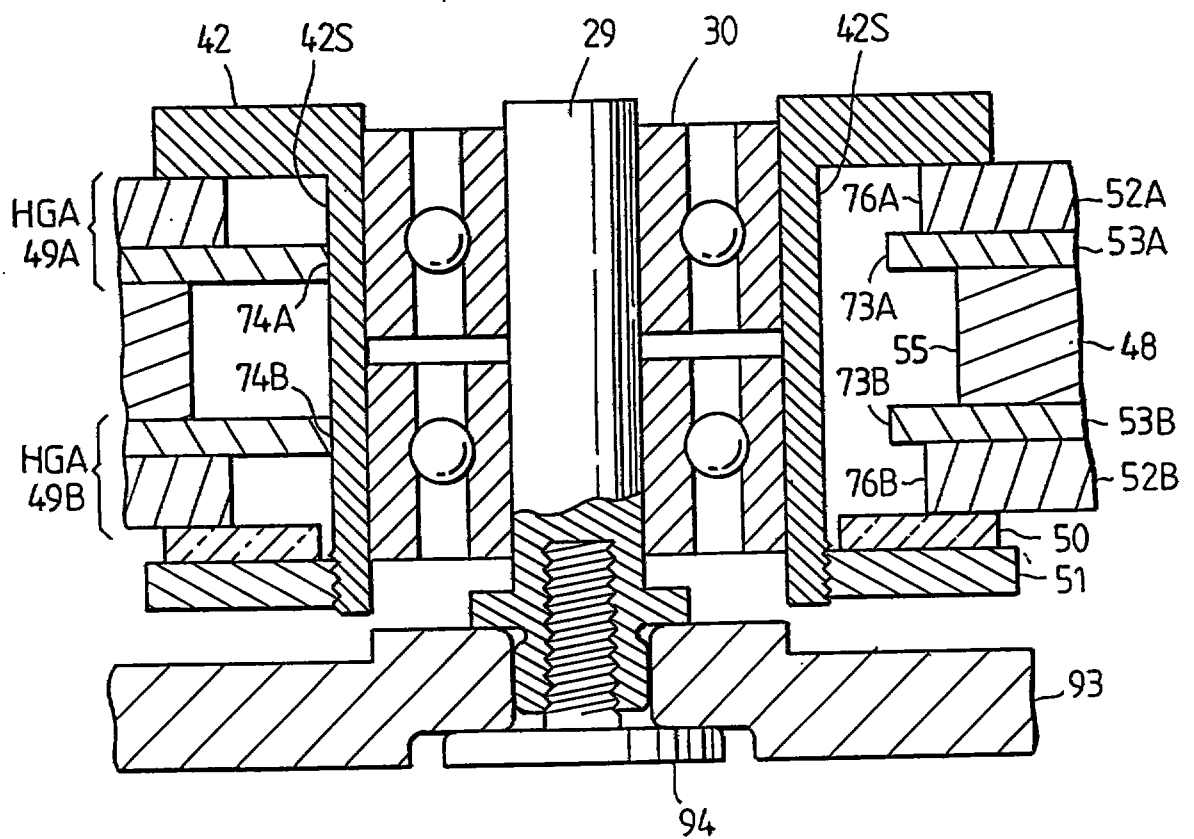


FIG. 10

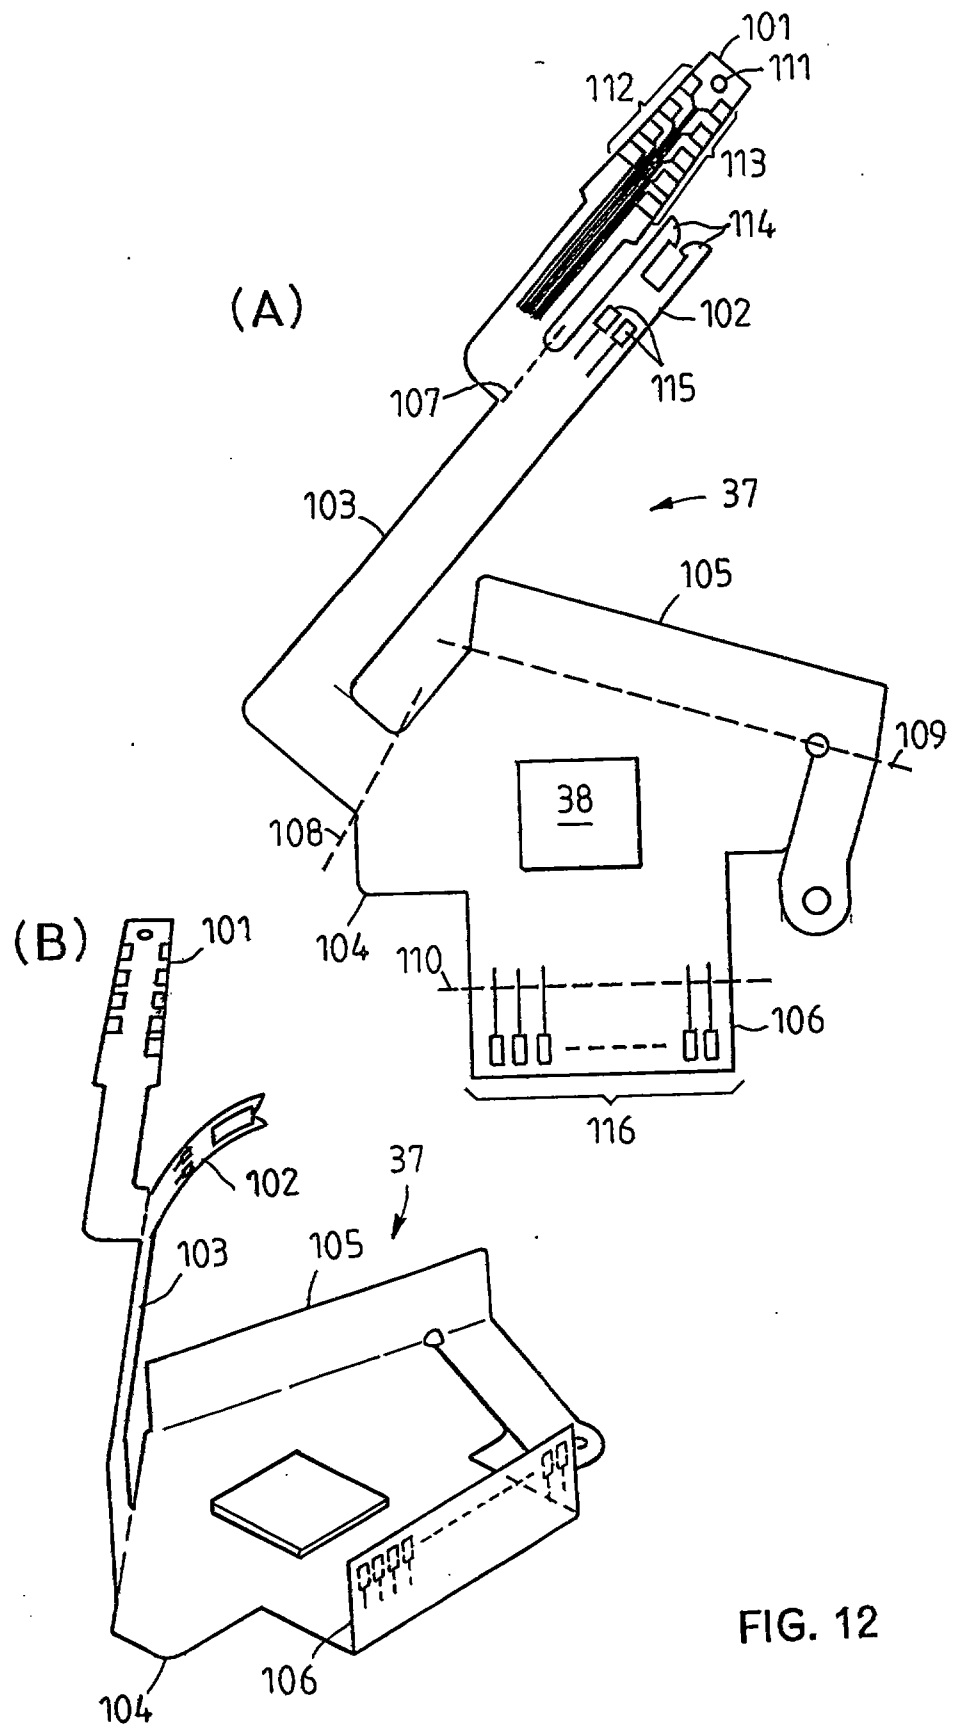


FIG. 12

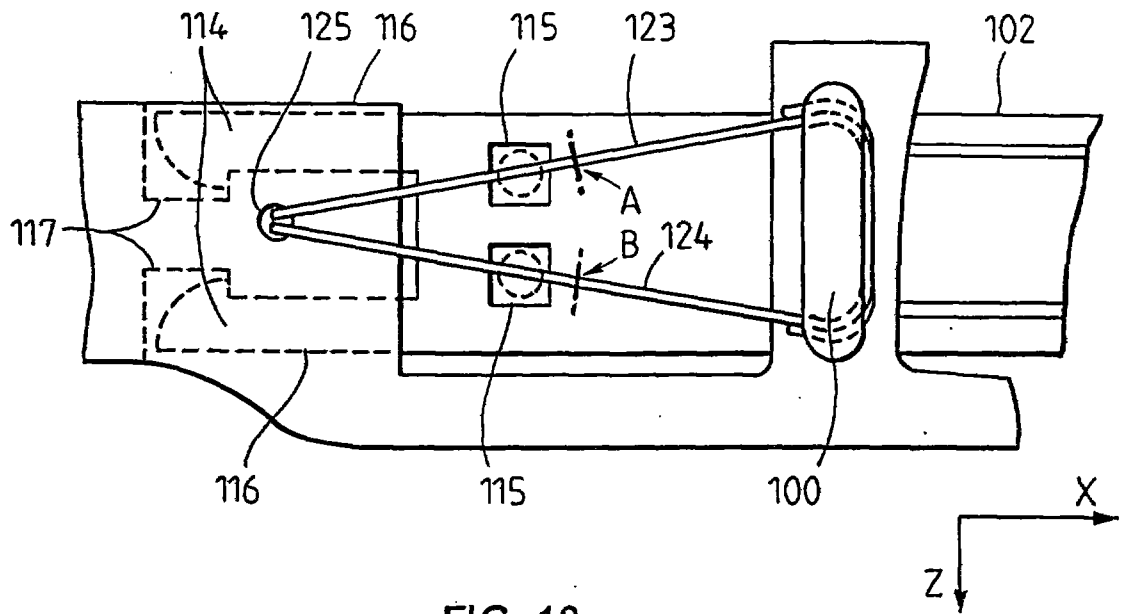


FIG. 13

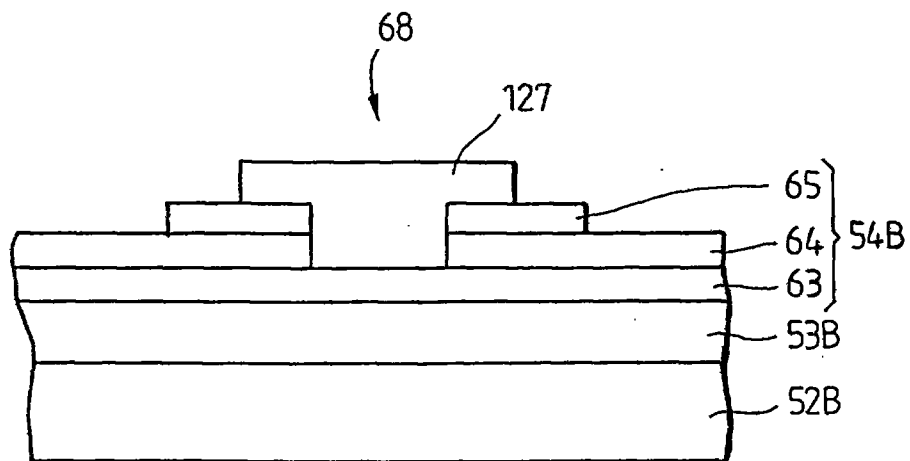


FIG. 15

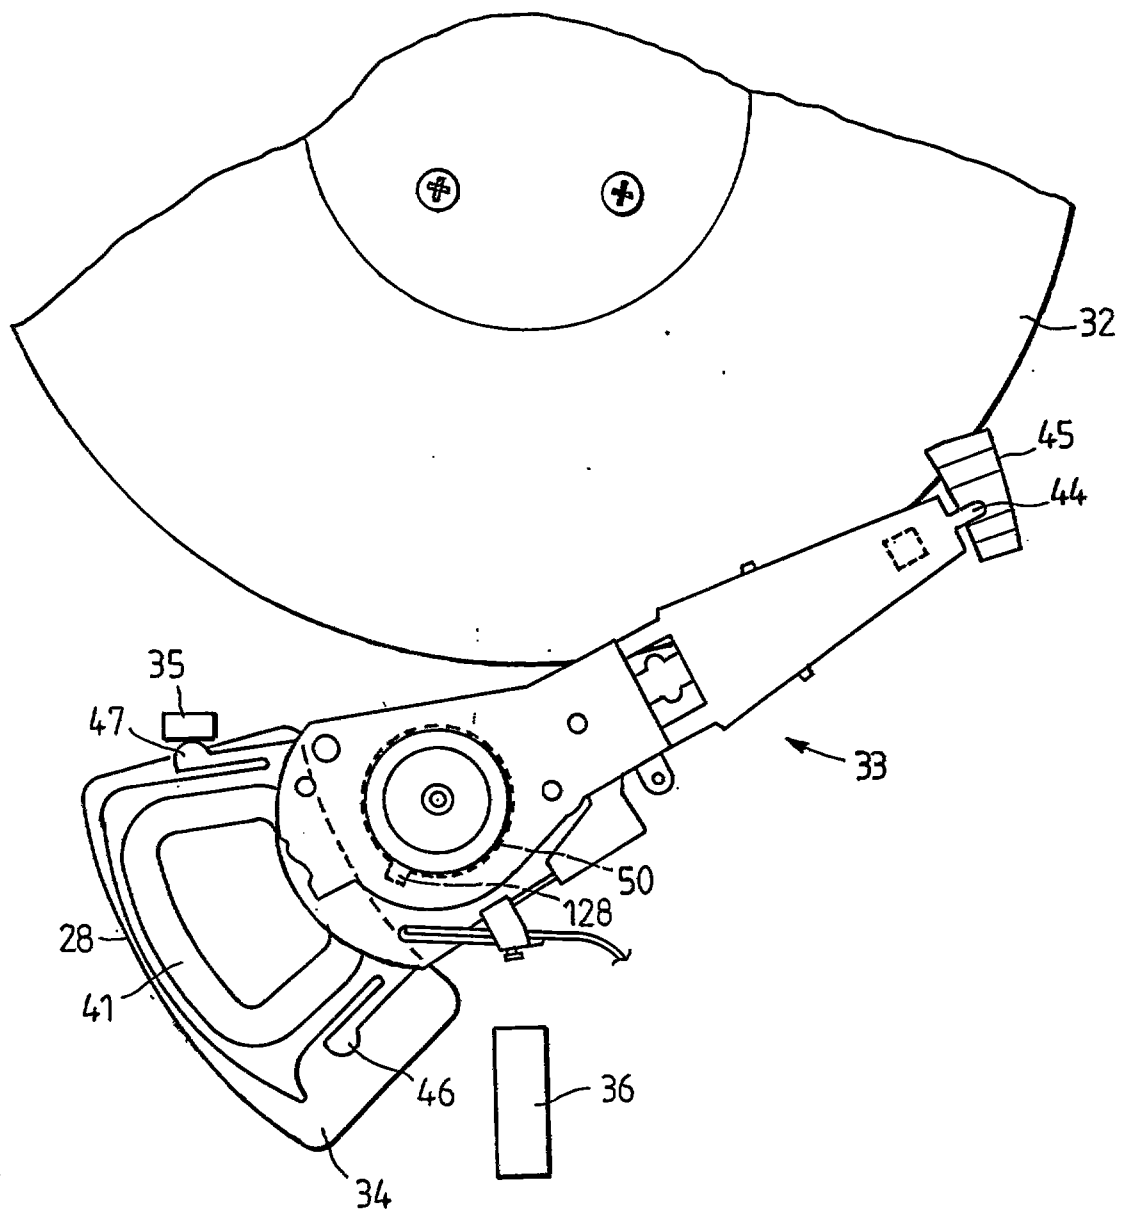


FIG. 16


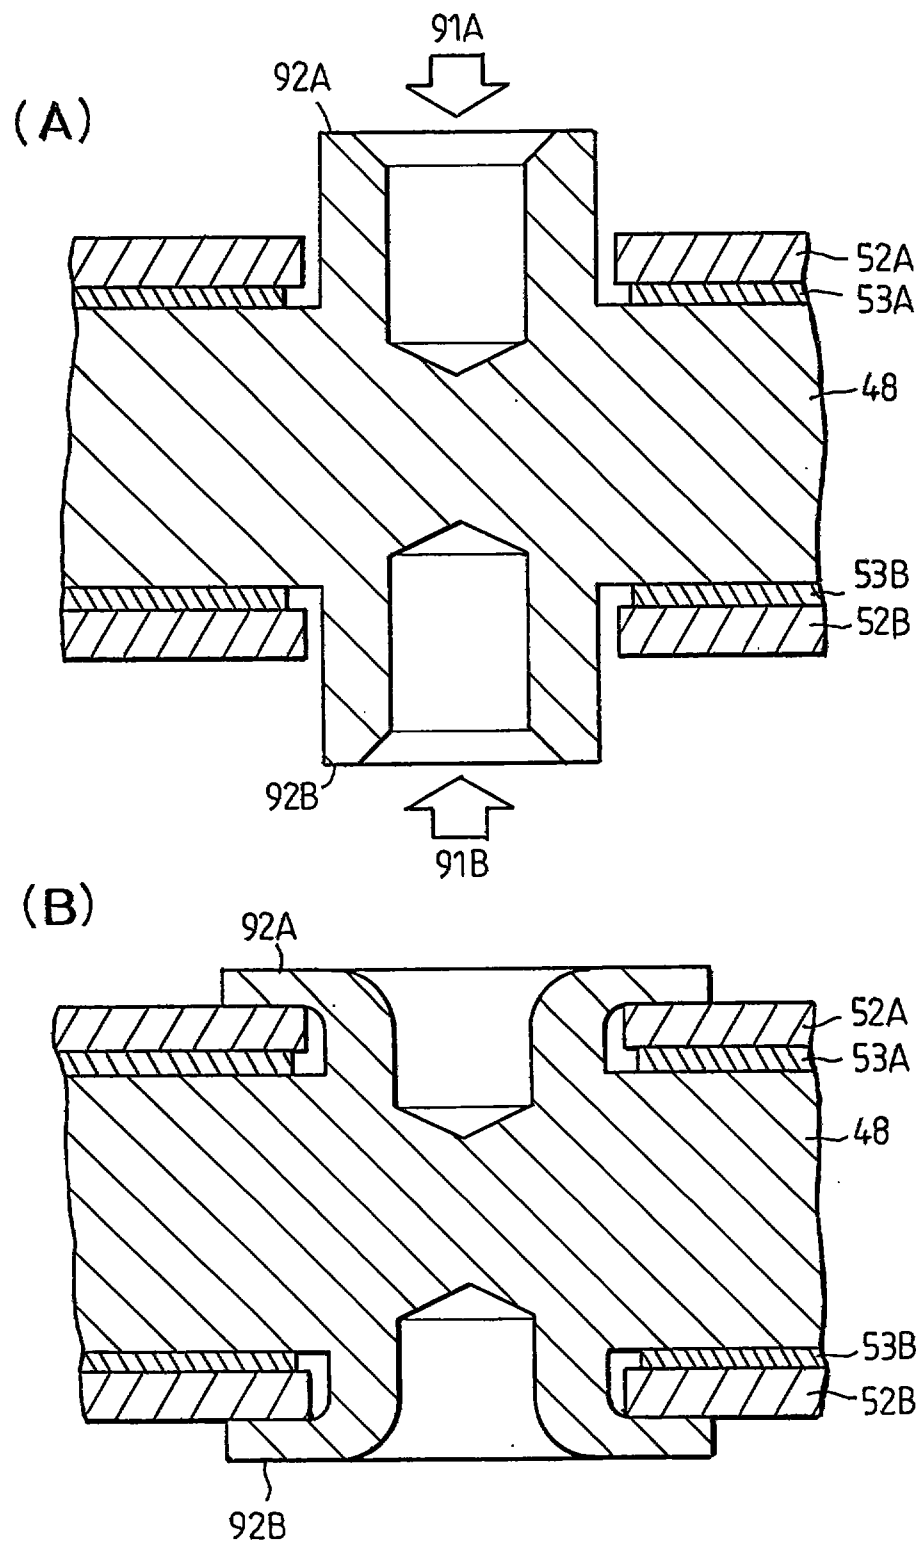


FIG. 17

(A)

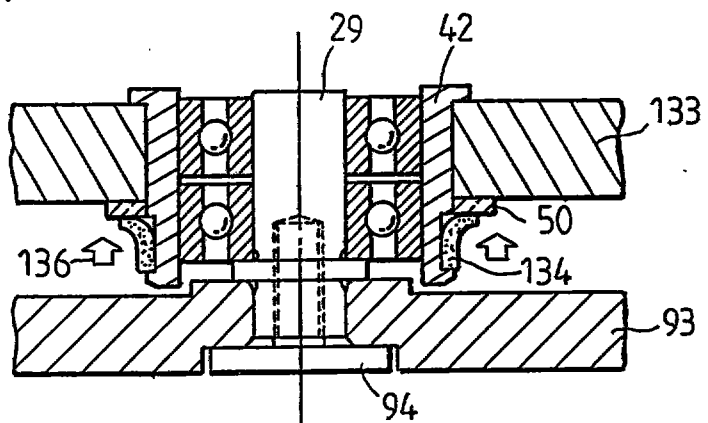

(B)

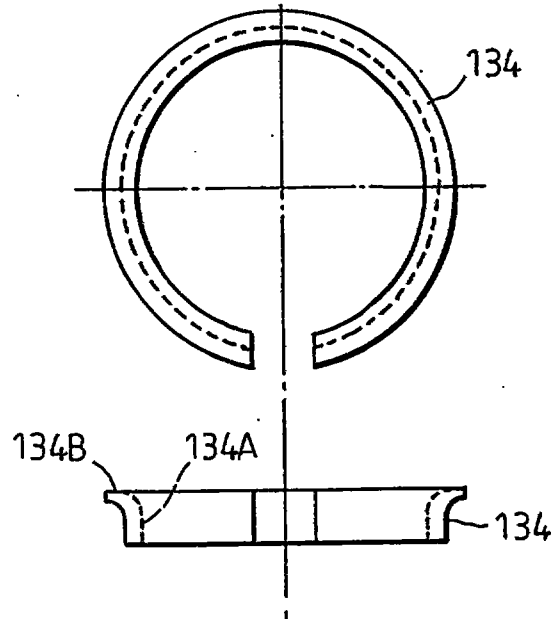


FIG. 18

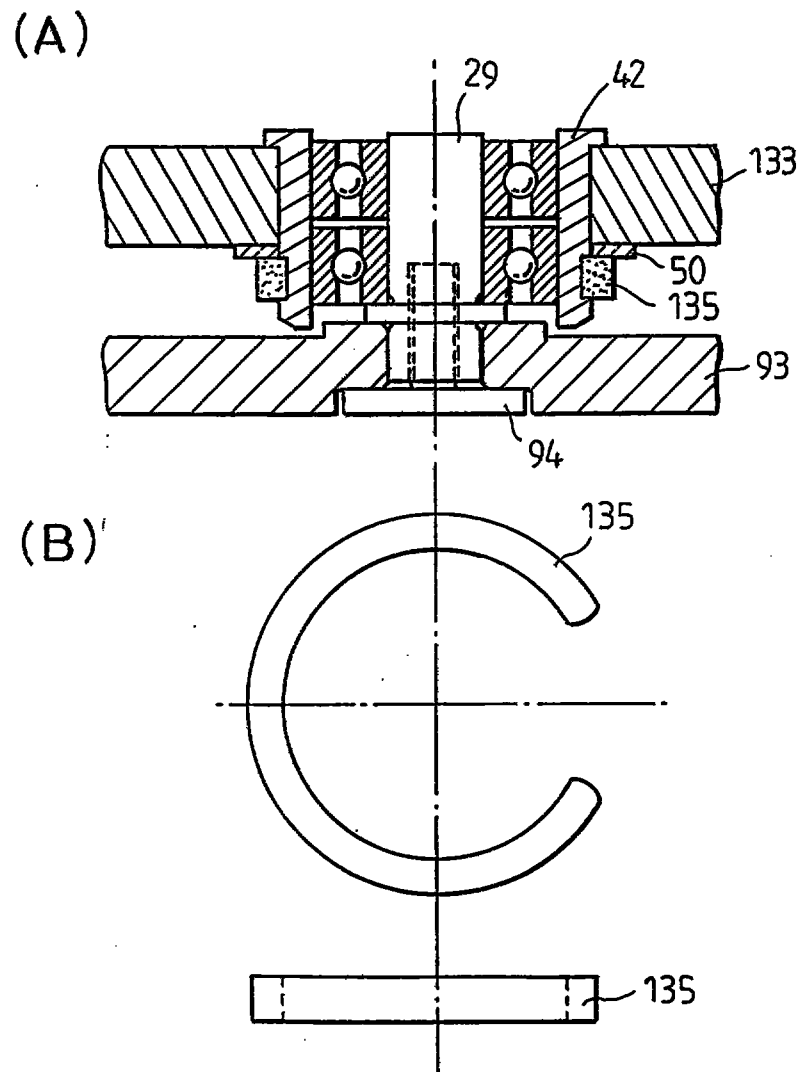


FIG. 19