

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number
WO 01/68218 A1

- (51) International Patent Classification⁷: B01D 33/03, 33/41, 29/01, 29/56 (74) Agent: KEITH W NASH & CO; 90-92 Regent Street, Cambridge CB2 1DP (GB).
- (21) International Application Number: PCT/GB01/01009 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 8 March 2001 (08.03.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0005832.1 11 March 2000 (11.03.2000) GB (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): UNITED WIRE LIMITED [GB/GB]; Granton Park Avenue, Edinburgh EH5 1HT (GB).
- Published:
— with international search report
- (72) Inventor; and
(75) Inventor/Applicant (*for US only*): COOK, Gordon, James [GB/GB]; 6 St. Nathan's Road, Newtonhill, Stonehaven, Aberdeenshire AB39 3SW (GB).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FILTERING SCREENS FOR VIBRATORY SEPARATION EQUIPMENT

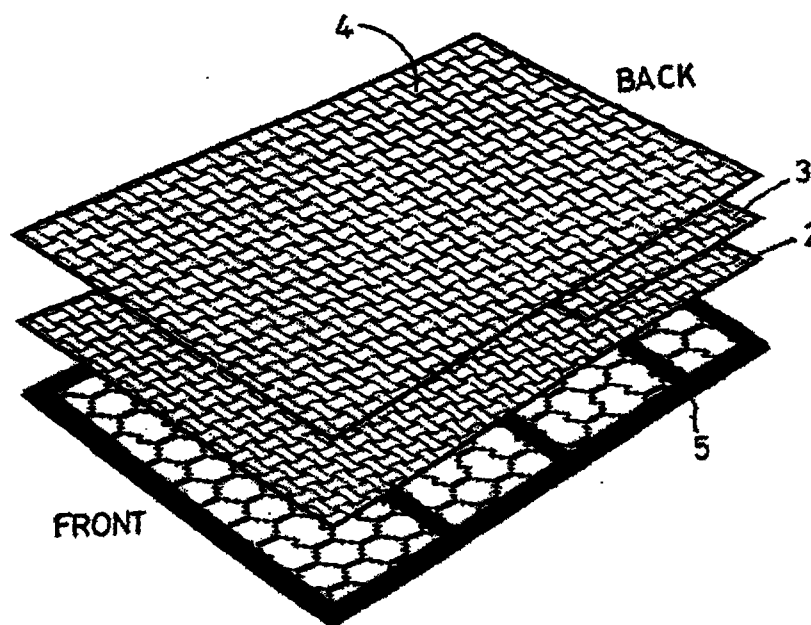

(57) Abstract: A filtering screen comprises a fine woven wirecloth filtering mesh (4) disposed above a coarse woven wirecloth support mesh (2). An intermediate woven wirecloth mesh (3) is disposed between the fine woven mesh (4) and the coarse woven mesh (2), the intermediate mesh (3) extending over a proportion of the area of the screen at or towards the rear thereof, said proportion being in the range of 20 % to 40 % of the area of the screen, and preferably substantially one third of the area of the screen.

WO 01/68218 A1