(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
2 October 2003 (02.10.2003)

PCT

(10) International Publication Number
WO 2003/081893 A3

(51) International Patent Classification[7]: G06F 1/16

(21) International Application Number:
PCT/US2003/007627

(22) International Filing Date: 12 March 2003 (12.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/103,057 20 March 2002 (20.03.2002) US

(71) Applicant *(for all designated States except US)*: **CORNICE, INC.** [US/US]; 1951 S.Fordham Street, Suite 105, Longmont, CO 80503 (US).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **BRUNER, Curtis, H.** [US/US]; 8374 Greenwood Drive, Longmont, CO 80503 (US). **FLETCHER, John, F.** [US/US]; 522 Abbey Drive, Longmont, CO 80501 (US). **FLETCHER, Frida, E., Romauli** [US/US]; 522 Abbey Drive, Longmont, CO 80501 (US).


(74) Agents: **GALLENSON, Mavis, S.** et al.; LADAS & PARRY, 5670 Wilshire Boulevard, Suite 2100, Los Angeles, CA 90036-5679 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: DIGITAL STORAGE ARRANGEMENT

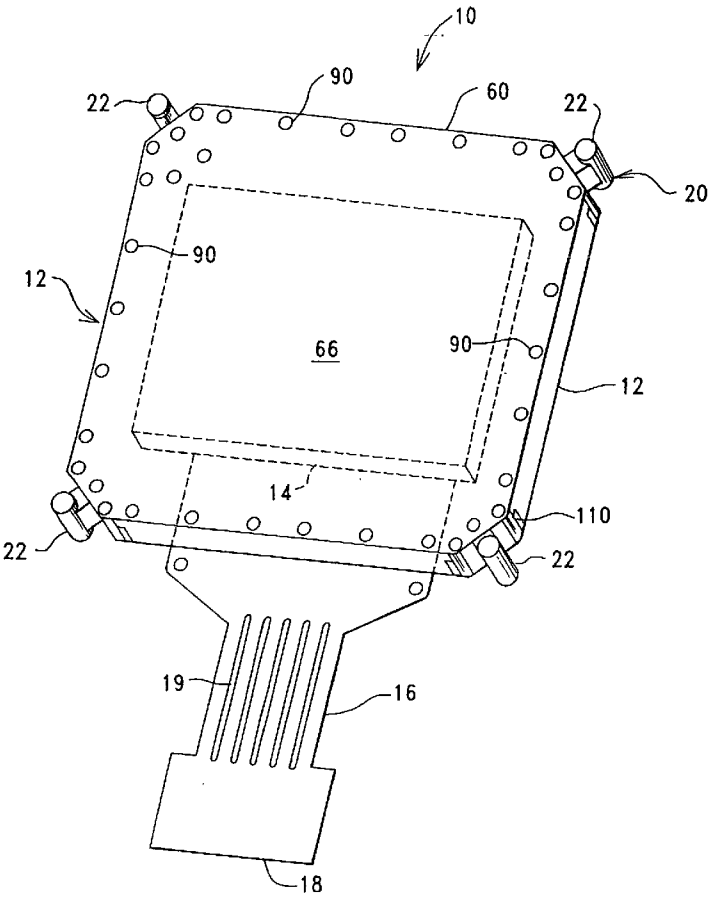

(57) Abstract: A digital storage arrangement is interfaceable with a host device which defines a cavity. The digital storage arrangement includes a housing a receivable in the cavity, with a movement margin between the housing (12) and host device, while a resilient support arrangement is provided for fixed engagement with the host device (30) and for engaging the housing, while extending through the movement margin, to support the housing within the storage device cavity and to subject the storage device (14) to a lesser degree of mechanical shock when the host device receives a given mechanical shock. The resilient support arrangement provides support by extending from each corner region of the housing to the extend outwardly to the host device. The support arrangement is molded through an opening defined by the housing in each corner region to extend outwardly to the host device. A bumper configuration is provided integral with the support arrangement and including a sealing arrangement.

WO 2003/081893 A3

Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

(88) Date of publication of the international search report:
5 February 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.