

(51) International Patent Classification:
G10L 19/14 (2006.01)(21) International Application Number:
PCT/EP2011/060555(22) International Filing Date:
23 June 2011 (23.06.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/361,237 2 July 2010 (02.07.2010) US(71) Applicant (for all designated States except US): **DOLBY INTERNATIONAL AB** [SE/NL]; Apollo Building 3E, Herikerbergweg 1-35, NL-1101 CN Amsterdam Zuidoost (NL).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **RESCH, Barbara** [AT/SE]; Tunvägen 14, 5 tr, S-170 68 Solna (SE). **KJÖRLING, Kristofer** [SE/SE]; Lostigen 10, S-170 75Solna (SE). **VILLEMOES, Lars** [DK/SE]; Mandolinvägen 22, S-175 56 Järfälla (SE).(74) Agent: **AWAPATENT AB**; Stefan Engdahl, P.O. Box 45086, Drottninggatan 89, S-104 30 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

[Continued on next page]

(54) Title: SELECTIVE BASS POST FILTER

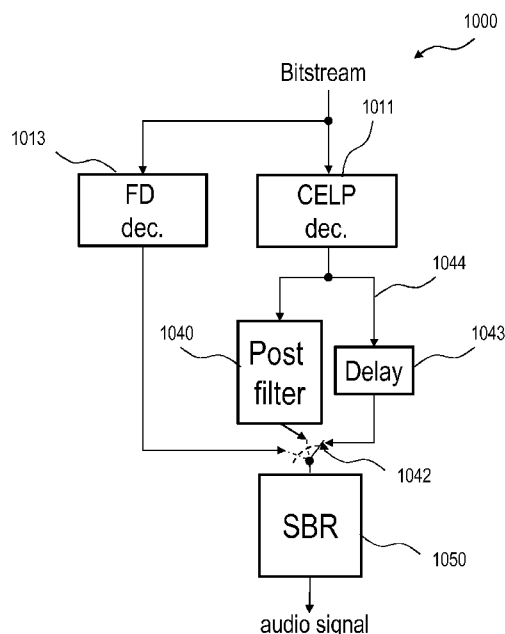

(57) Abstract: In one aspect, the invention provides an audio encoding method characterized by a decision being made as to whether the device which will decode the resulting bit stream should apply post filtering including attenuation of interharmonic noise. Hence, the decision whether to use the post filter, which is encoded in the bit stream, is taken separately from the decision as to the most suitable coding mode. In another aspect, there is provided an audio decoding method with a decoding step followed by a post-filtering step, including interharmonic noise attenuation, and being characterized in a step of disabling the post filter in accordance with post filtering information encoded in the bit stream signal. Such a method is well suited for mixed-origin audio signals by virtue of its capability to deactivate the post filter in dependence of the post filtering information only, hence independently of factors such as the current coding mode.

Fig. 10



LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, — *with international search report (Art. 21(3))*
GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*