



(51) International Patent Classification:
G01F 1/10 (2006.01) *H05B 37/02* (2006.01)
H05B 33/08 (2006.01)

(21) International Application Number:
PCT/AU2013/000503

(22) International Filing Date:
16 May 2013 (16.05.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2012902012 16 May 2012 (16.05.2012) AU

(71) Applicant: SCHNEIDER ELECTRIC SOUTH EAST
ASIA (HQ) PTE LTD [SG/SG]; 10 Ang Mo Kio Street
65, #01-01/03 Techpoint, 569059 (SG).

(72) Inventor; and

(71) Applicant (for BB only): BOORA, Arash [AU/AU]; 78
Waterloo Road, MacQuarie Park 2113, New South Wales
(AU).

(72) Inventor: STELMACH, Aleksander Roman; 78 Water-
loo Road, MacQuarie Park 2113, New South Wales (AU).

(74) Agent: MADDERNS; Gpo Box 2752, Adelaide 5001,
South Australia (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: METHOD, APPARATUS AND SYSTEM FOR CONTROLLING AN ELECTRICAL LOAD

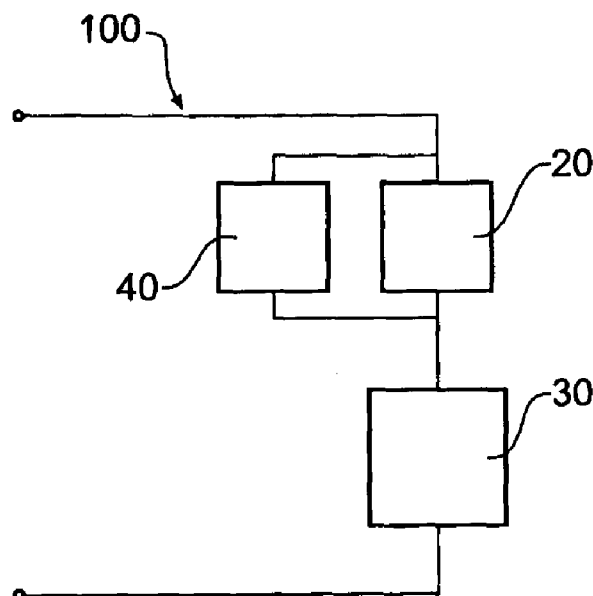


Figure 4A

(57) Abstract: Disclosed is a system, apparatus and method
for controlling an electrical load. A bypass device is
provided in parallel with the electrical load, which in use, ad-
opts a high conduction or low impedance state when a con-
troller controlling the electrical load is in a low conduction
or off state. In one embodiment, the bypass device comprises
a detector for detecting the conduction state of the controller,
and a bypass control for controlling the impedance of the by-
pass device in response to the detected state of the controller.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, **Published:**

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*