

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2011 年 6 月 23 日(23.06.2011)


PCT

(10) 国際公開番号
WO 2011/074354 A1

- (51) 国際特許分類:
F21S 2/00 (2006.01) G02F 1/1333 (2006.01)
F21V 3/00 (2006.01) G02F 1/13357 (2006.01)
F21V 3/04 (2006.01) H04N 5/66 (2006.01)
F21V 29/00 (2006.01) F21Y 101/02 (2006.01)
- (21) 国際出願番号: PCT/JP2010/069912
- (22) 国際出願日: 2010 年 11 月 9 日(09.11.2010)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2009-285346 2009 年 12 月 16 日(16.12.2009) JP
- (71) 出願人 (米国を除く全ての指定国について):
シャープ株式会社(SHARP KABUSHIKI KAISHA)
[JP/JP]; 〒5458522 大阪府大阪市阿倍野区長池町
2 2 番 2 2 号 Osaka (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 黒水 泰守
(KUROMIZU Yasumori).
- (74) 代理人: 特許業務法人暁合同特許事務所(AKAT-SUKI UNION PATENT FIRM); 〒4600008 愛知県
名古屋市中区栄二丁目 1 番 1 号 日土地名古屋
ビル 5 階 Aichi (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- 添付公開書類:
— 国際調査報告 (条約第 21 条(3))

(54) Title: ILLUMINATING DEVICE, DISPLAY DEVICE, AND TELEVISION RECEIVER

(54) 発明の名称: 照明装置、表示装置およびテレビ受信装置

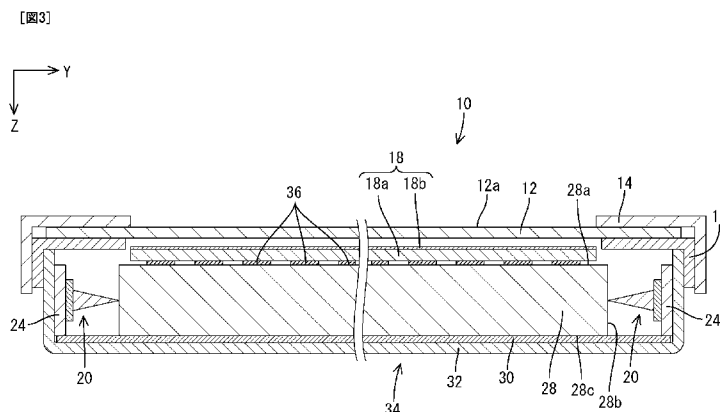

(57) Abstract: Disclosed is a technology of maintaining the optical design of an illuminating device, which is provided with a light source substrate having a light source disposed thereon, even if a light guide plate is thermally expanded and the light source substrate is thermally deformed due to heat generated when the light source emits light. A backlight device (34) is provided with: the LED substrate (24); the LED light source (22) disposed on the surface of the LED substrate (24); the light guide plate (28) which guides light emitted from the LED light source (22); and a spacer member (20) which regulates the distance between the LED substrate (24) and the light guide plate (28). In the backlight device (34), since the distance between the light guide plate (28) and the LED substrate (24), and warping and floating of the LED substrate (24) are regulated by means of the spacer member (20), the distance between the LED light source (24) and the light guide plate (28) is constantly maintained.

(57) 要約:

[続葉有]



WO 2011/074354 A1