

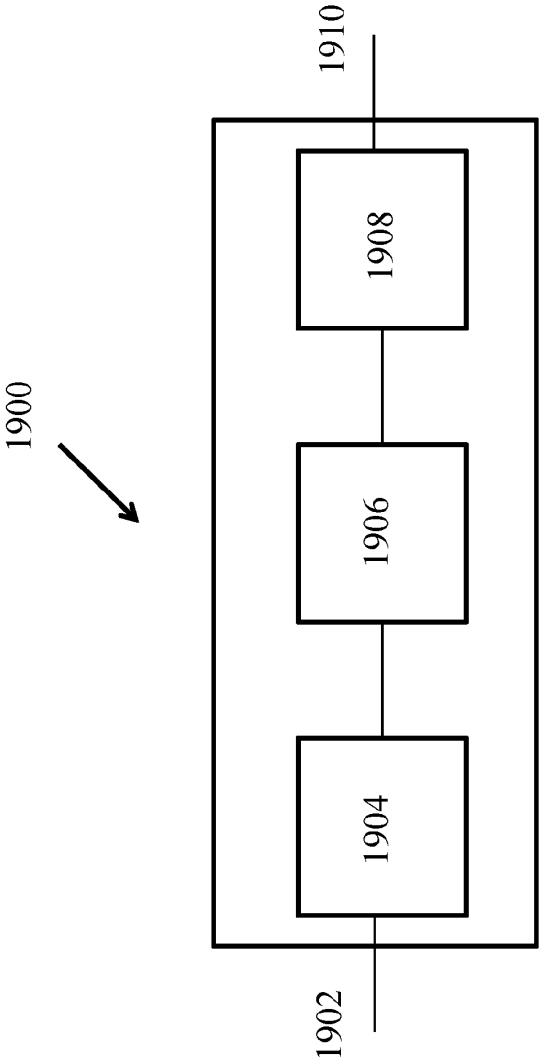


FIG. 1

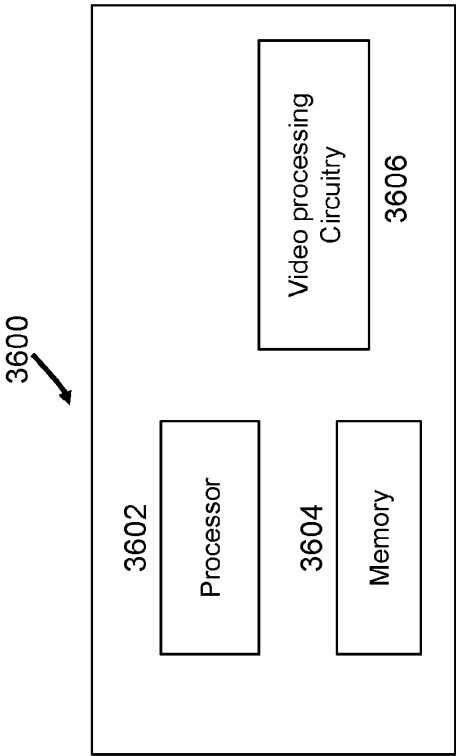


FIG. 2

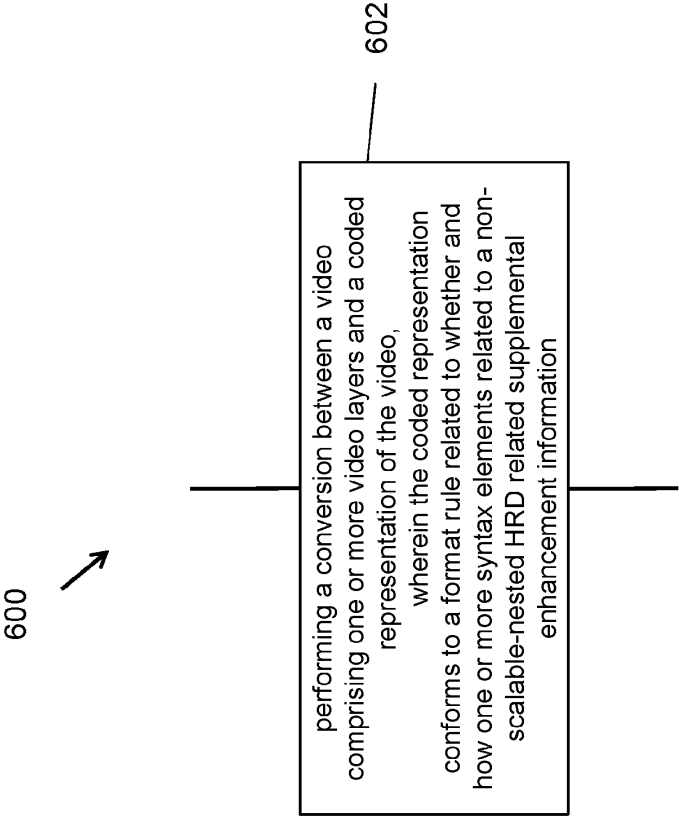


FIG. 3

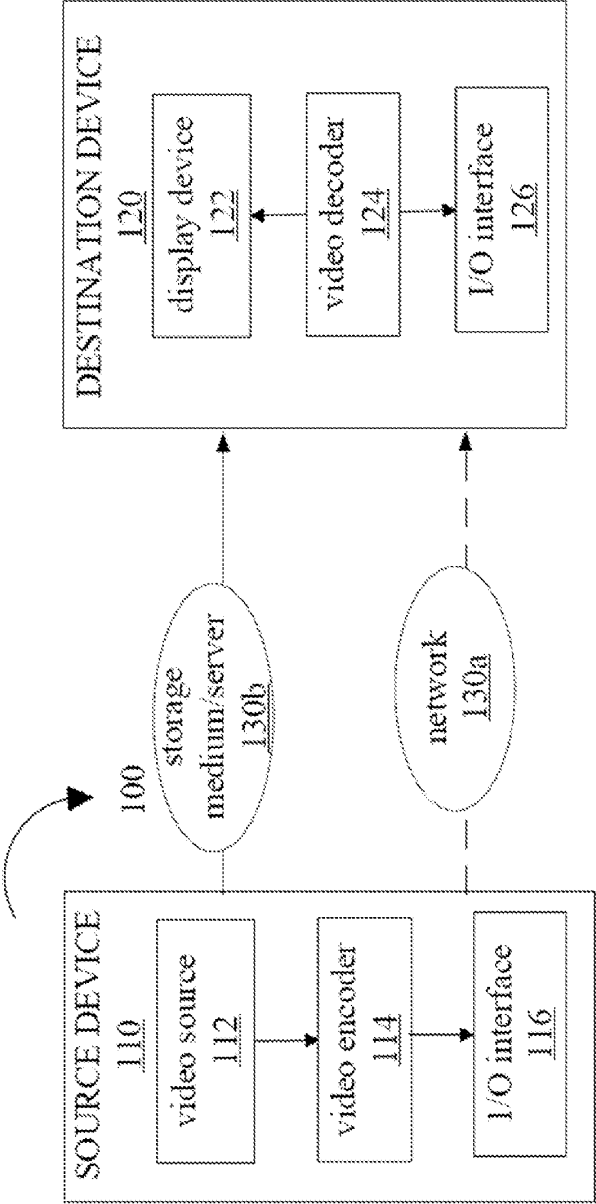


FIG. 4

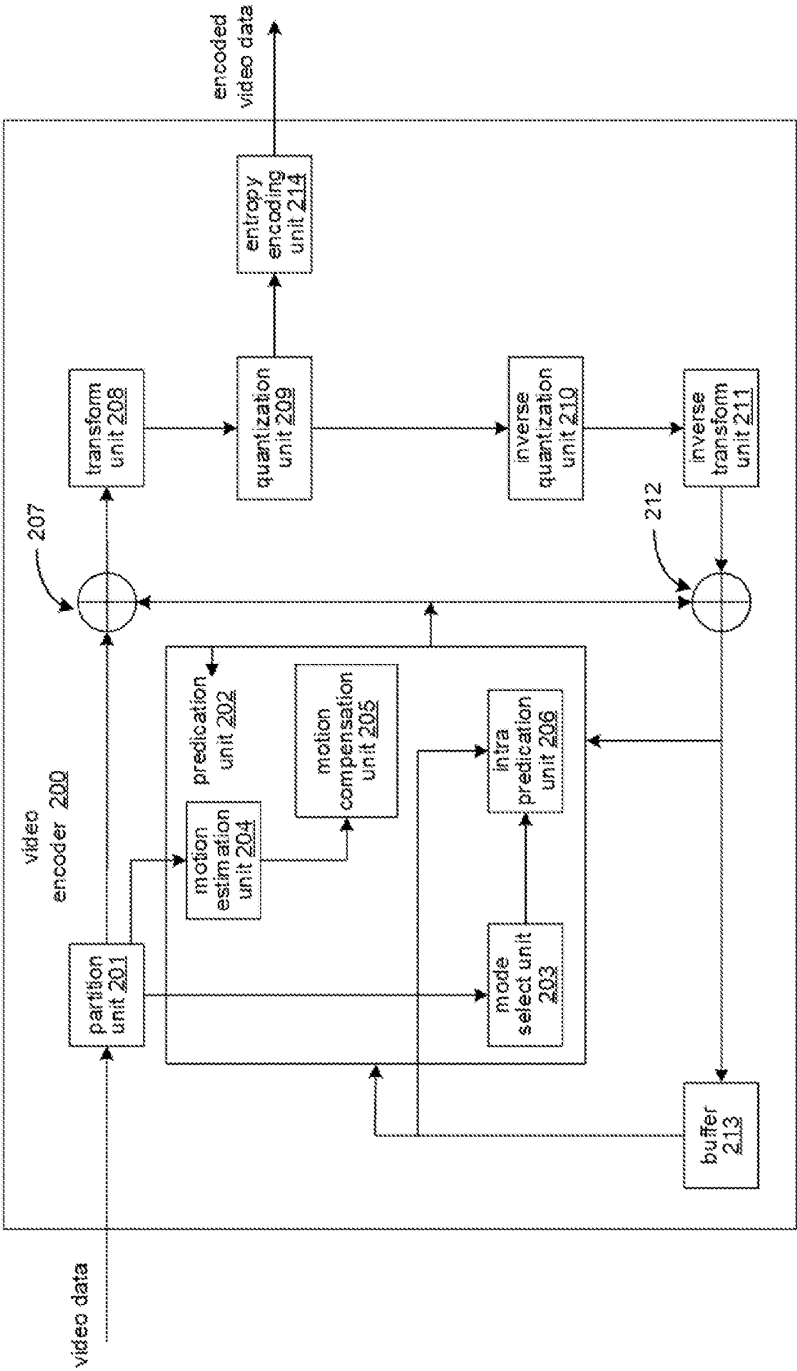


FIG. 5

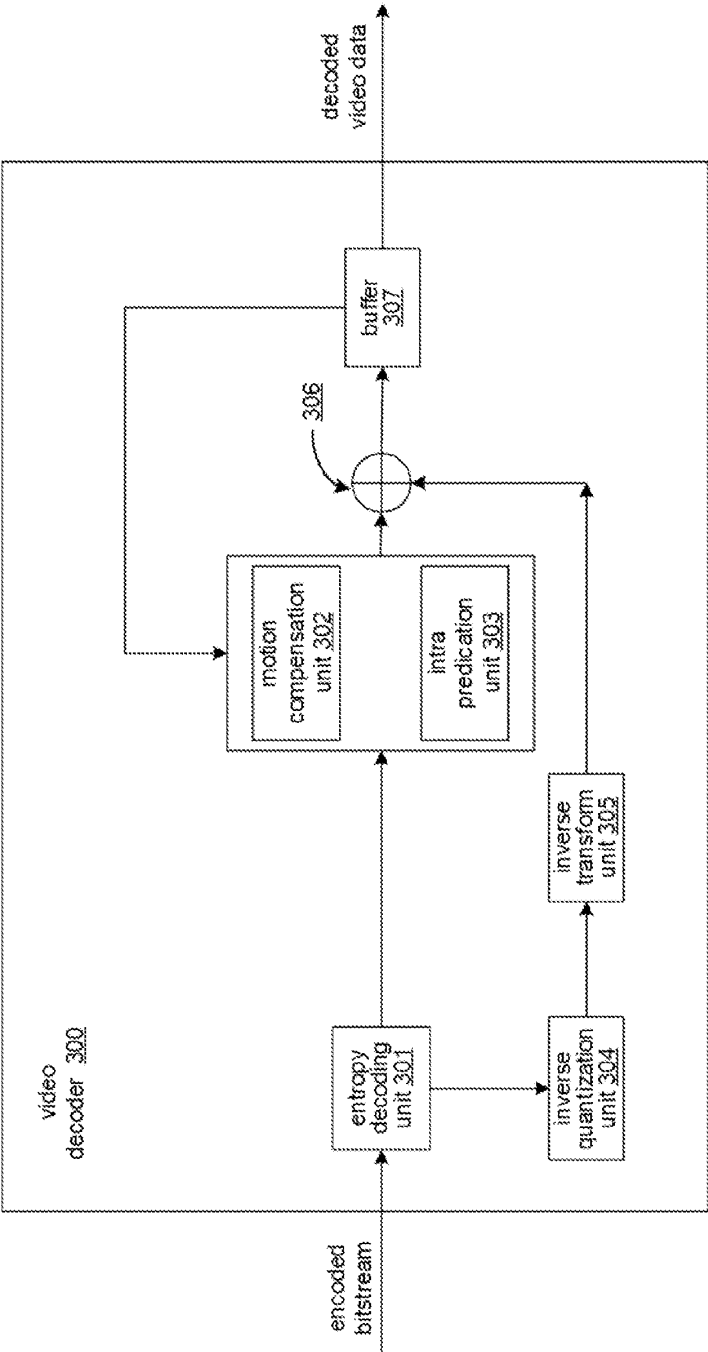


FIG. 6

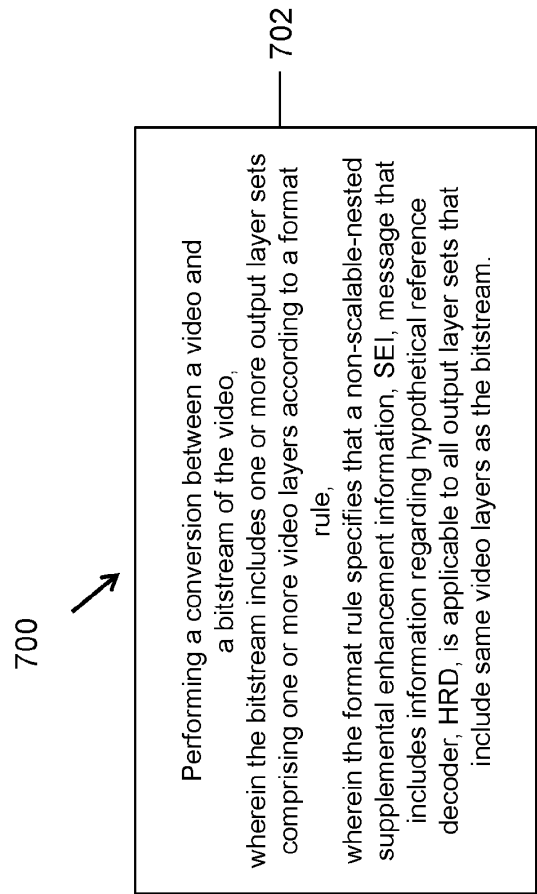


FIG. 7A

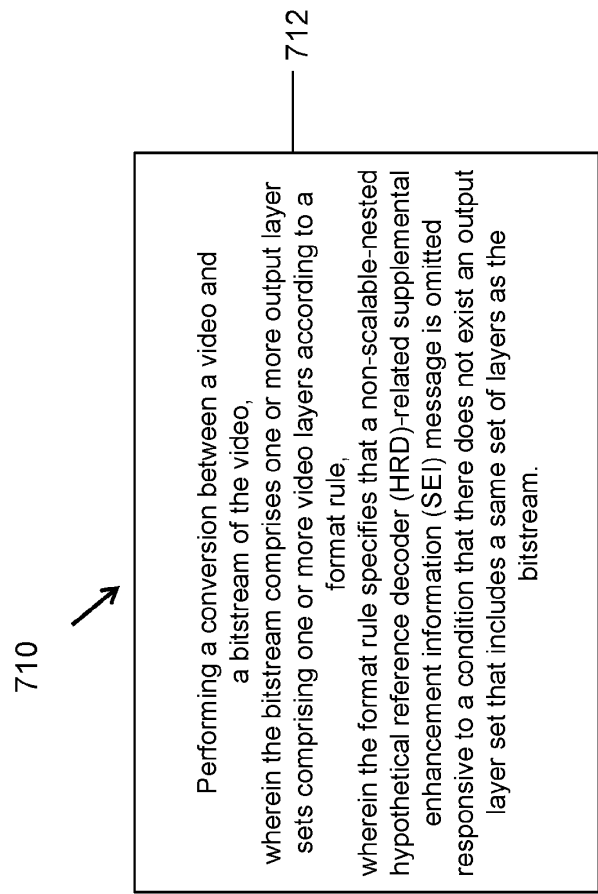


FIG. 7B

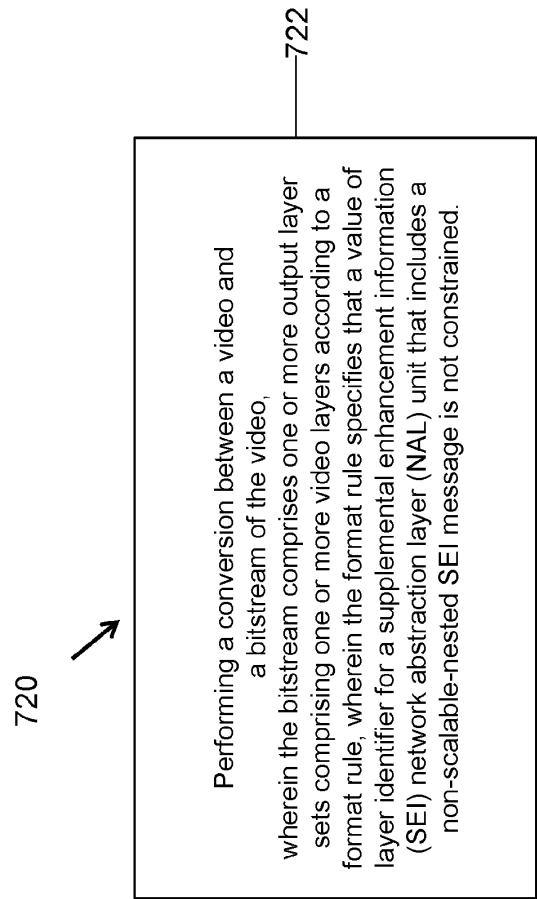


FIG. 7C

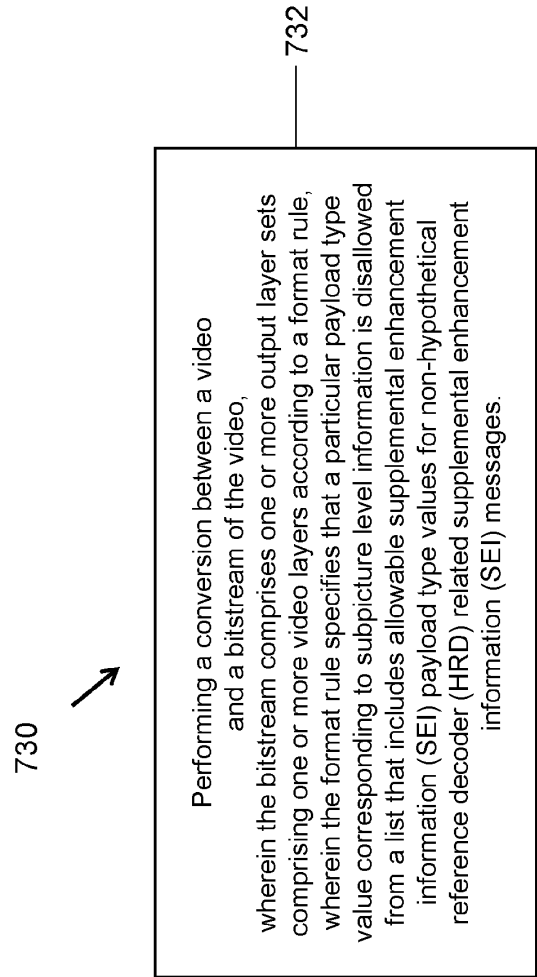


FIG. 7D

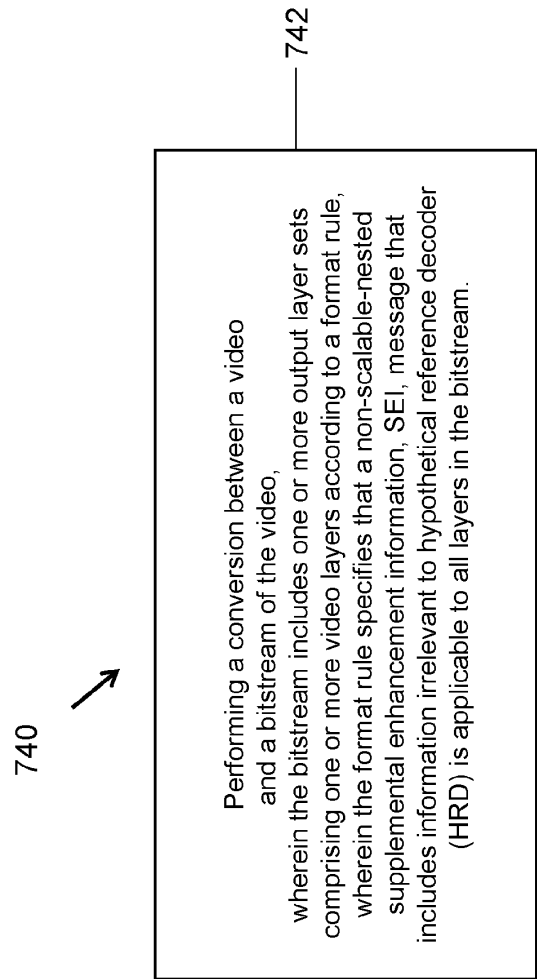


FIG. 7E

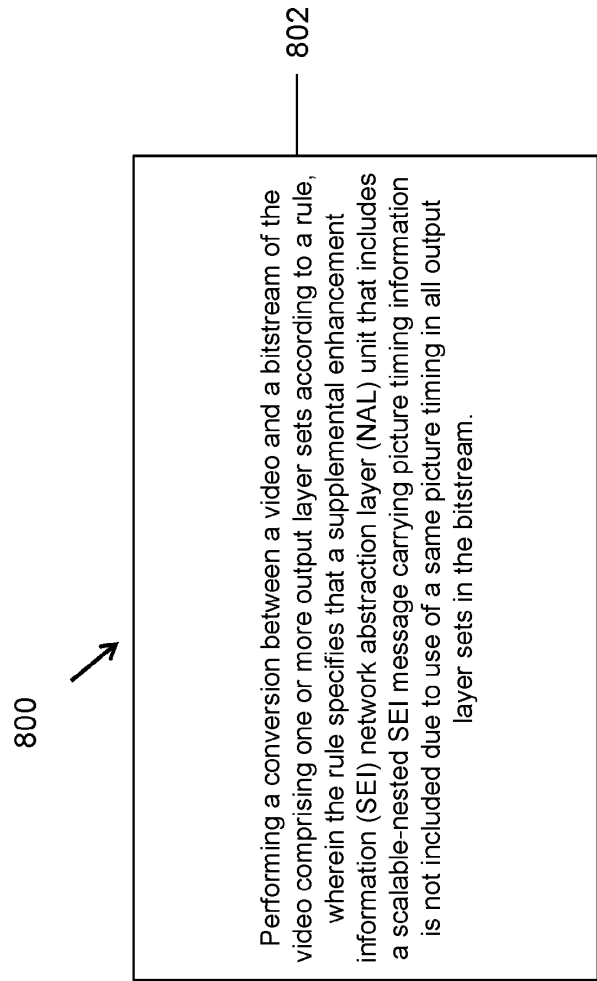


FIG. 8

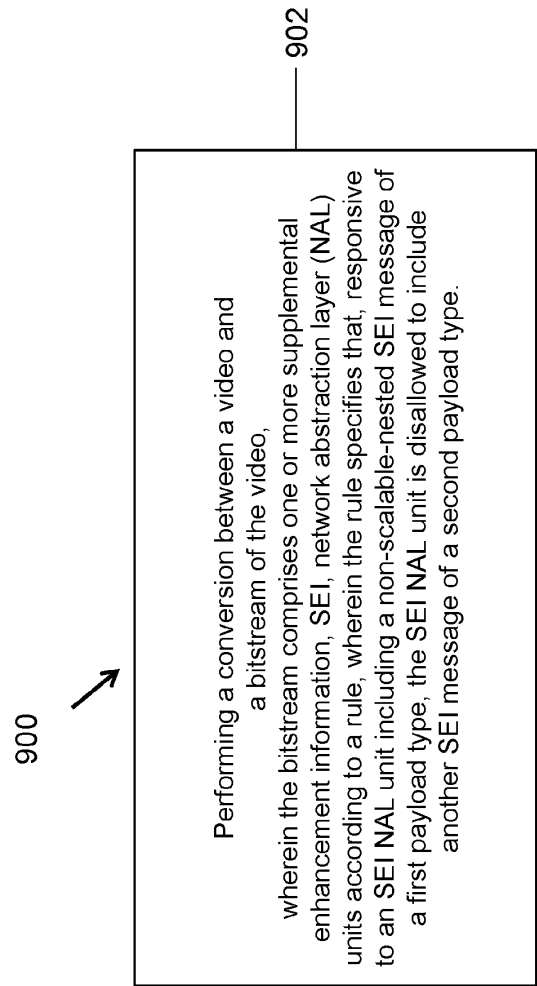


FIG. 9A

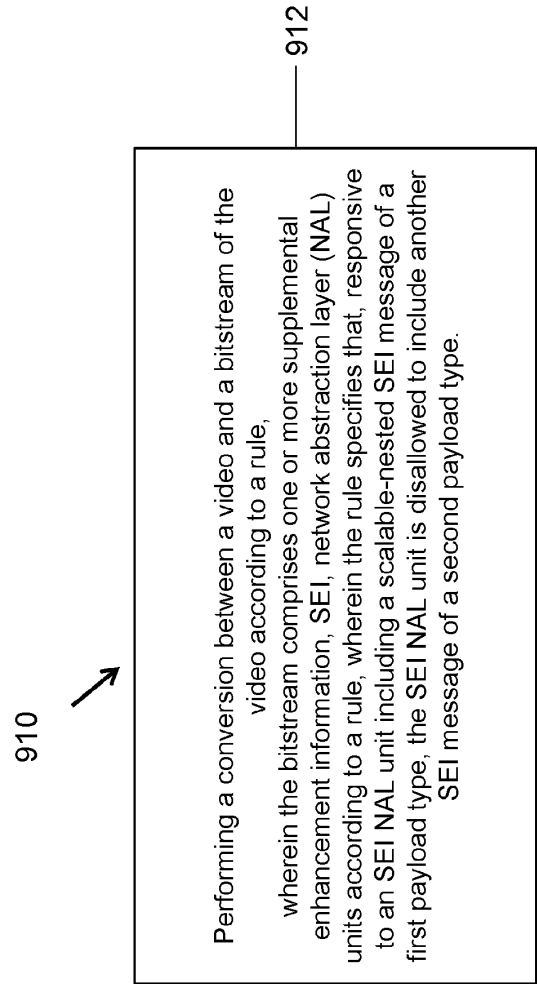


FIG. 9B

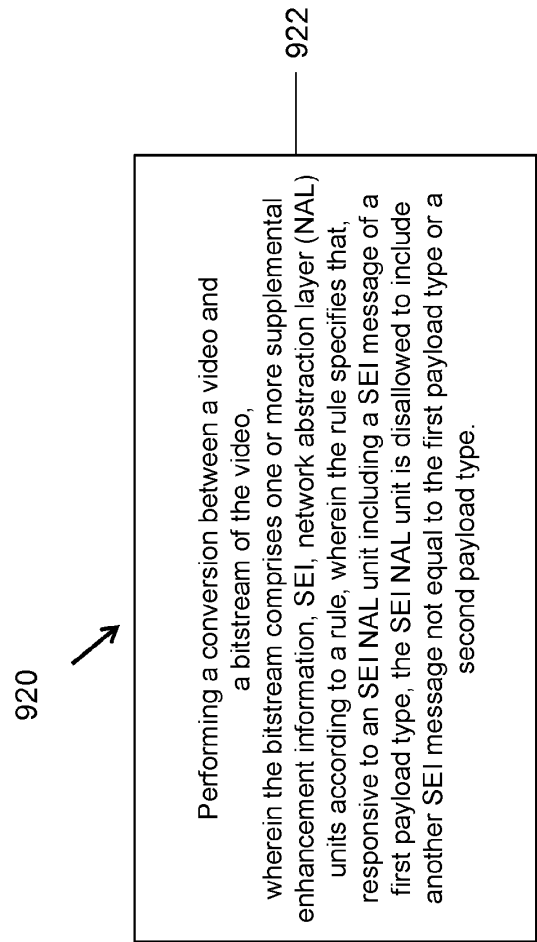


FIG. 9C

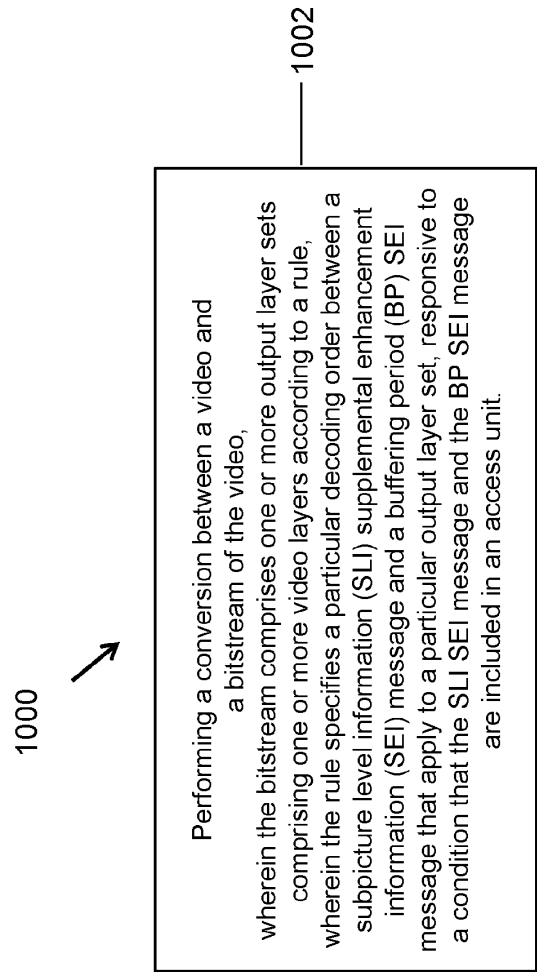


FIG. 10A

1010



Performing a conversion between a video and a bitstream of the video according to a rule, wherein the rule specifies that a first syntax field indicating sublayer representation information for which an initial coded picture buffer (CPB) removal delay related syntax elements are present is omitted, responsive to a particular value of a second syntax field indicative of a maximum number of temporal sublayers for which an initial CPB removal delay is indicated in a buffering period supplemental enhancement information (SEI) message.

1012

FIG. 10B