

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 December 2002 (19.12.2002)


PCT

(10) International Publication Number
WO 02/102051 A2

- (51) International Patent Classification⁷: **H04N** (74) Agents: Jones, Daniel, S. et al.; Michael Best & Friedrich LLP, 100 East Wisconsin Avenue, Milwaukee, WI 53202-4108 (US).
- (21) International Application Number: PCT/US02/18746
- (22) International Filing Date: 13 June 2002 (13.06.2002) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/297,853 13 June 2001 (13.06.2001) US
- (71) Applicant: **ROBOTIC VISION SYSTEMS, INC.** [US/US]; 5 Shawmut Road, Canton, MA 02021 (US).
- (72) Inventors: **KATT, Dallin**; 315 Cheviot Chase #3, Wauke-
sha, WI 53186 (US). **SHIRES, Mark, R.**; 5561 North
Navajo Avenue, Glendale, WI 53217 (US). **BERTZ,**
Robert, G.; 1624 North 70th Street, Wauwatosa, WI
53213 (US). **REILLY, Michael**; 1631 South 169th Street,
New Berlin, WI 53151 (US). **BEHNKE, Merlin**; 1961
Ulao Court, Grafton, WI 53024 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: POST-SEAL INSPECTION SYSTEM

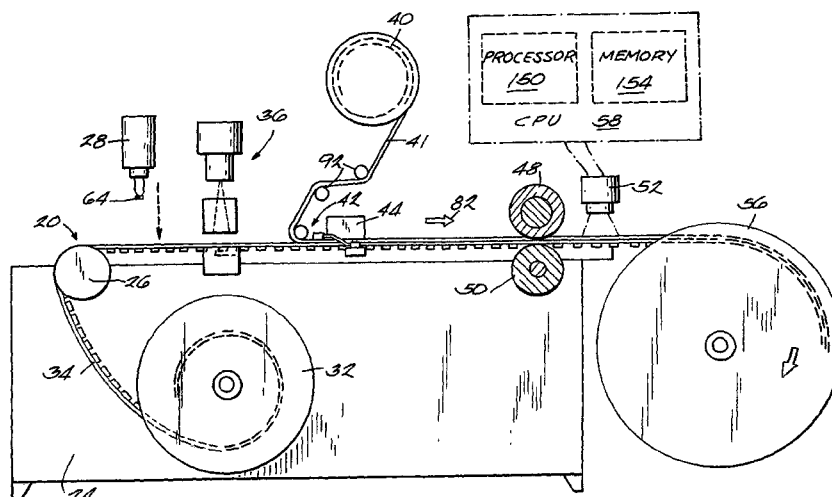

(57) Abstract: A method for inspecting composite tape including cover tape bonded to carrier tape comprises capturing a digital image of the composite tape, dividing the seal tracks within the image into a plurality of fragments or segments. The method also provides for analyzing each segment of the seal track for the presence or absence of the seal and for the width of the seal, and assigning a failing grade to the segment if the seal is not continuous within the segment or if the seal has a width less than a minimum width within the segment. The method further provides for notifying a machine operator of a defective seal if the number consecutively-failed segments in the seal track exceeds a defect tolerance. The method also provides for measuring the spacings of the carrier tape edge, cover tape edge, and seal tracks from each other and comparing those spacings to acceptable values.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.