



(51) International Patent Classification:
E21B 17/00 (2006.01) *B08B 9/023* (2006.01)

(74) Agent: **ACAPO AS**; P.O. Box 1880 Nordnes, N-5817 Bergen (NO).

(21) International Application Number:
PCT/NO2011/000166

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
8 June 2011 (08.06.2011)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20100858 16 June 2010 (16.06.2010) NO

(71) Applicant (for all designated States except US): **Siem WIS AS** [NO/NO]; Knarrevik Næringspark, N-5355 Knarrevik (NO).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and
(75) Inventors/Applicants (for US only): **EDVARSEN, Per Espen** [NO/NO]; Bjørgelien 39, N-5141 Fyllingsdalen (NO). **ASKELAND, Tom Ketil** [NO/NO]; Krokavegen 86, N-5353 Straume (NO).

[Continued on next page]

(54) Title: GRINDING ARRANGEMENT FOR TOOL JOINTS ON A DRILL STRING

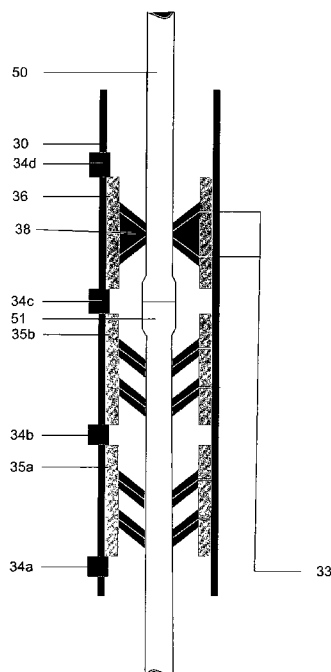


Fig. 2

(57) Abstract: A grinding arrangement is described to remove sharp edges on a pipe coupling (51) of a drill string (50), as a consequence of marks from the jaws of pliers and machines used to connect the pipe couplings (51) on a drill deck. A receiving unit (30) is arranged to receive a grinding unit (36) which is equipped with at least one grinding element (38), as the grinding unit (36) is arranged to be driven into the receiving unit (30) with the help of the drill string (50) or a suitable running tool and to be locked securely into the receiving unit (30). Furthermore, the receiving unit is arranged in a riser, landing string or in other connections between the drill deck and a wellhead and over a sealing arrangement for dynamic sealing around the drill string (50) during pressure controlled drilling.

WO 2011/159165 A1



Published:

— *with international search report (Art. 21(3))*