

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 April 2005 (21.04.2005)

PCT

(10) International Publication Number
WO 2005/035352 A2

(51) International Patent Classification⁷: **B63B**

[US/US]; 20770 Putting Avenue, Hastings, MN 55033 (US).

(21) International Application Number:
PCT/US2004/031092

(74) Agents: **HEMPHILL, Stuart, R.** et al.; Dorsey & Whitney LLP, Intellectual Property Department, Suite 1500, 50 South Sixth Street, Minneapolis, MN 54402-1498 (US).

(22) International Filing Date:
22 September 2004 (22.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/508,615 3 October 2003 (03.10.2003) US
10/945,553 20 September 2004 (20.09.2004) US

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **HYDRALIFT AMCLYDE, INC.** [US/US]; 240 East Plato Boulevard, St. Paul, MN 55107-1631 (US).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **NIEBUR, Alvin, J.**

[Continued on next page]

(54) Title: FAIRLEAD WITH INTEGRATED CHAIN STOPPER

(57) Abstract: The present invention is a fairlead for guiding and securing an anchor chain between an offshore structure and an anchor. The fairlead comprises a fairlead frame, a pivoting latch, and an actuator. The fairlead frame is pivotally mounted to the offshore structure and supports an axle for a chain sheave. The pivoting latch is mounted to pivot on the axle and comprises a tension link with a chain latch and a counterweight for urging the chain latch into engagement with the chain. The pivoting latch is configured to engage the chain only when the chain is traveling in the payout direction. The actuator controls the action of the counterweight.

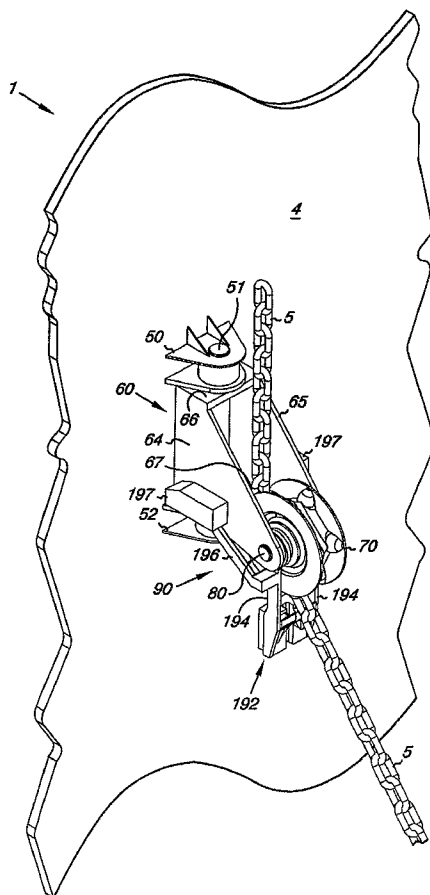

WO 2005/035352 A2



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*