

(19) World Intellectual Property Organization  
International Bureau



\*G00002\*

(43) International Publication Date  
8 August 2002 (08.08.2002)

PCT

(10) International Publication Number  
**WO 02/060600 A1**

(51) International Patent Classification<sup>7</sup>: **B05C 17/01**

(21) International Application Number: PCT/IB01/01304

(22) International Filing Date: 23 July 2001 (23.07.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/775,068 1 February 2001 (01.02.2001) US

(71) Applicant: **DISPENSING TECHNOLOGIES INTERNATIONAL CORP.** [/US]; 500 Main Street, Clinton, MA 01510 (US).

(72) Inventor: **GARDOS, Ivan**; 68 (Apt. 1) Schrewsbury Green Drive, Schrewsbury, MA 01545 (US).

(74) Agent: **RINES, Robert, Harvey**; MacLeod Allsop, Bledington Grounds, Bledington, Gloucestershire OX7 6XL (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


**Published:**  
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FLUID DISPENSER



\*162162\*

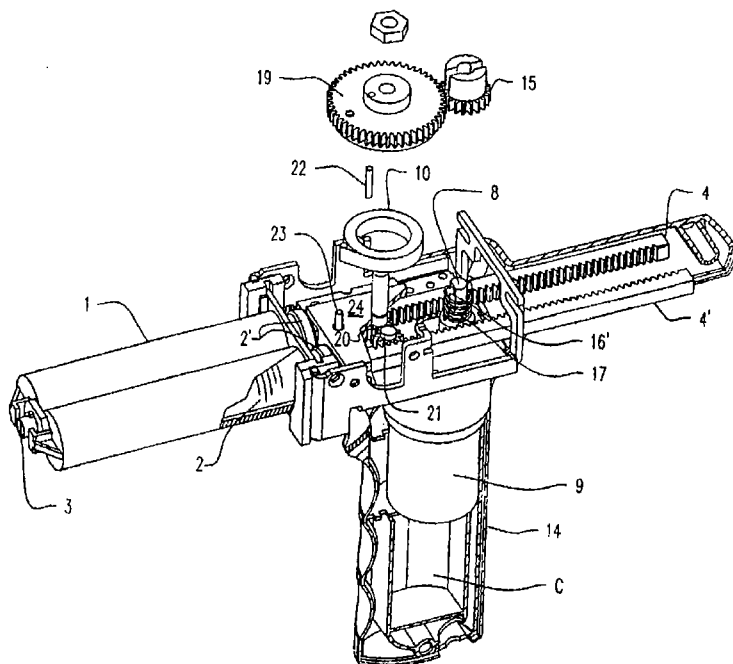

(57) Abstract: An improved electric motor-operated, preferably hand-held, fluid dispenser, using in-line longitudinal drive (4) racks and fluid cartridge containers dispensed by the racks (4), the driving (and retraction) being controlled through the use of a flat (pancake) coil spring (10); and the cartridge being mountable in an adjustable cartridge holder for accommodating different-shaped rear cartridge mounting flanges.

WO 02/060600 A1