

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 February 2006 (23.02.2006)

PCT

(10) International Publication Number
WO 2006/019562 A2

(51) International Patent Classification:

H04J 3/02 (2006.01) **H04J 3/16** (2006.01)
H04J 3/22 (2006.01) **H04B 7/00** (2006.01)

(21) International Application Number:

PCT/US2005/023891

(22) International Filing Date: 5 July 2005 (05.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/588,960 19 July 2004 (19.07.2004) US
11/113,763 25 April 2005 (25.04.2005) US

(71) Applicant (for all designated States except US): **INTER-DIGITAL TECHNOLOGY CORPORATION** [US/US];
300 Delaware Avenue, Suite 527, Wilmington, Delaware
19801 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TERRY, Stephen, E.**
[US/US]; 15 Summit Avenue, Northport, New York 11768
(US).


(74) Agent: **BALLARINI, Robert, J.**; VOLPE AND
KOENIG, P.C., United Plaza, Suite 1600, 30 S. 17th
Street, Philadelphia, Pennsylvania 19103 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR ENHANCED UPLINK MULTIPLEXING

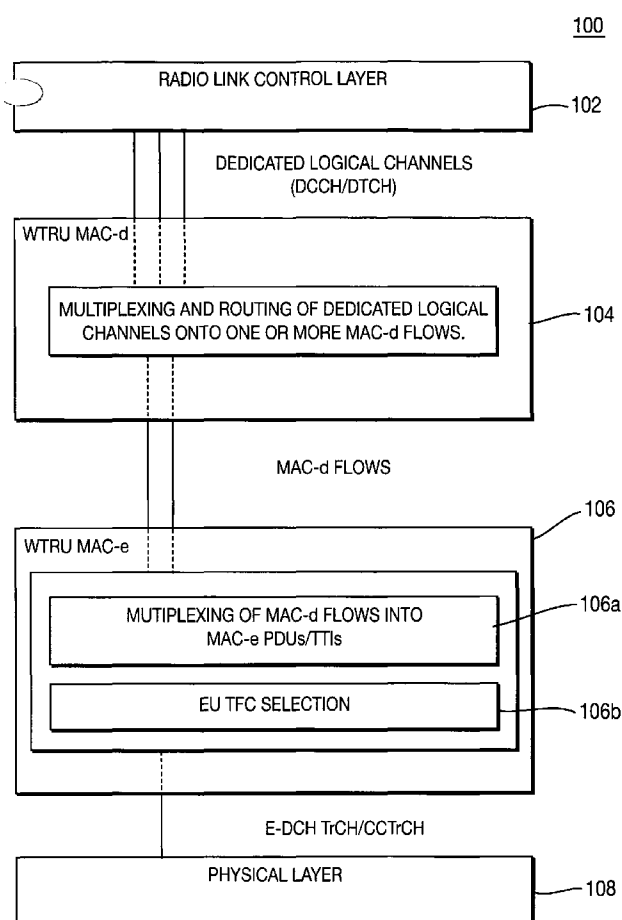

(57) Abstract: A method and apparatus for enhanced uplink multiplexing are disclosed. A set of combinations of MAC-d flows (and/or logical channels) that are allowed to be multiplexed within a MAC-e PDU is defined for a WTRU. The WTRU MAC-e entity selects a combination among a set of allowed combinations for multiplexing MAC-d flows for each MAC-e PDU. Certain MAC-d flow combinations may be defined that can not be blocked from transmission even when the WTRU is in a transmit power restricted state. The amount of data from each logical channel or corresponding MAC-d flow that can be multiplexed within a MAC-e PDU may be defined to ensure guaranteed data rates. When the WTRU is in a restricted power condition, an indication of the restricted power condition may be passed to the Node-B with the EU transmission.

WO 2006/019562 A2



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*