



(43) International Publication Date
5 December 2013 (05.12.2013)

(51) International Patent Classification:

F02K 1/82 (2006.01) *F02C 7/00* (2006.01)
F02K 1/80 (2006.01) *F01D 25/30* (2006.01)

(21) International Application Number:

PCT/US2013/029473

(22) International Filing Date:

7 March 2013 (07.03.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/416,174 9 March 2012 (09.03.2012) US

(71) Applicant: **UNITED TECHNOLOGIES CORPORATION** [US/US]; One Financial Plaza, Hartford, Connecticut 06101 (US).

(72) Inventors: **PARRISH, Russell P.**; 262 Naubuc Avenue, Glastonbury, Connecticut 06033 (US). **LAVIN, Jeffrey R.**; 20 Kenwood Circle, Bloomfield, Connecticut 06002 (US).

(74) Agent: **LABA, Kerrie A.**; Carlson, Gaskey & Olds/Pratt & Whitney, c/o CPA Global, P.O. Box 52050, Minneapolis, Minnesota 55402 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: SEAL ASSEMBLY

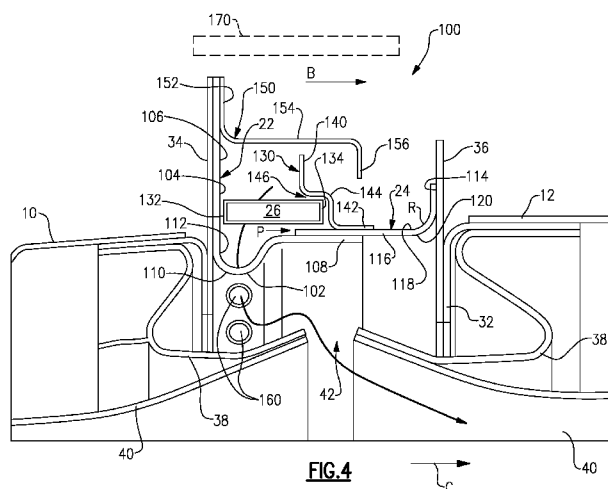

(57) Abstract: A seal assembly seals an interface between adjacent liner sections. The seal assembly comprises a seal carrier mounted to a first plate, a seal body overlapping at least a portion of the seal carrier to define a plane of travel between the seal body and the seal carrier, and at least one resilient member configured to bias the seal body against a second plate. The seal carrier includes an indented portion that extends radially inward of the plane of travel.