PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B63B 35/44, E02B 3/06 — A1

(11) International Publication Number: WO 97/20729

(43) International Publication Date: 12 June 1997 (12.06.97)

(21) International Application Number: PCT/NO96/00279

(22) International Filing Date: 26 November 1996 (26.11.96)

(30) Priority Data:
954946 6 December 1995 (06.12.95) NO
962441 10 June 1996 (10.06.96) NO

(71)(72) Applicant and Inventor: OLSEN, Fred [NO/NO]; Fred. Olsens gate 2, N-0152 Oslo (NO).

(72) Inventor; and
(75) Inventor/Applicant *(for US only)*: ØIGARDEN, Hans [NO/NO]; Årvollveien 48b, N-0590 Oslo (NO).

(74) Agent: TOFTING, Arild; Bryns Patentkontor a/s, P.O. Box 765, Sentrum, N-0106 Oslo (NO).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: WAVE DAMPENER FOR FLOATING STRUCTURES

(57) Abstract

A dampening device for dampening the vertical wave-induced motion component of a floating structure. The dampener projects in the form of a skirt down below the bottom of the floating structure (11) and consists of a plurality of channels (47) which extend substantially horizontally and converge from an inlet opening (27, 28, 36, 37, 38) to an outlet opening (16, 46) leading away from the floating structure (11). When the structure (11) moves downwards water is forced from the underside through the channels (47) and creates a jet effect which acts with dampening effect on the vertical motion of the structure. The dampening device may also be made in form of an outwardly projecting skirt on the floating structure and consist of a plurality of channels (17), where a number of first passages (27, 28) extend in a substantially vertical direction and merge into a number of second passages (29) which extend in an at least substantially horizontal direction, and thereby force the water from a substantially vertical direction of motion, through the first passages (27, 28), into a horizontal direction of motion through the second passages (29) during a part of the passage through the dampener (12). A combination of the two dampeners, in that the dampener (12) is located immediately above the dampener (13) is also possible.

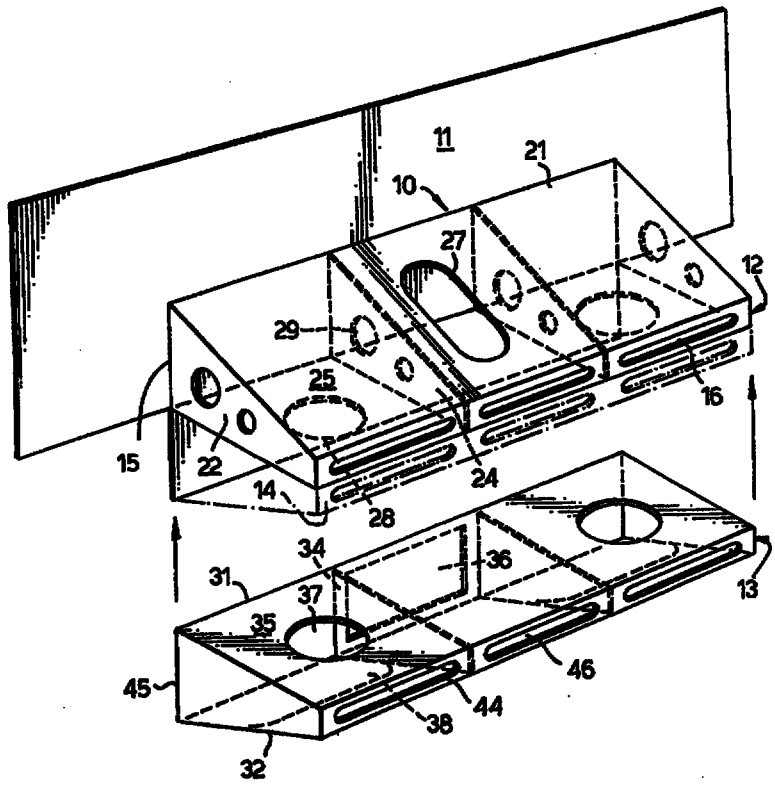

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam