

(51) International Patent Classification:
C10L 1/04 (2006.01)(21) International Application Number:
PCT/US2021/030058(22) International Filing Date:
30 April 2021 (30.04.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
17/244,222 29 April 2021 (29.04.2021) US

(71) Applicant: EXXONMOBIL TECHNOLOGY AND ENGINEERING COMPANY [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventors: ANDERSON, Timothy, J.; 52 Hedges Avenue, Chatham, NJ 07928 (US). FRUCHEY, Erin, R.; 1835 Arch Street, Apt. 811, Philadelphia, PA 19103 (US). GOLISZ, Suzanne, R.; 12 Glen View Drive, Ammandale, NJ 08801 (US). KAR, Kenneth, C.H.; 2807 Parrish Street, Philadelphia, PA 19130 (US). RUBIN-PITEL, Sheryl, B.; 232 South Chancellor Street, Newtown, PA 18940 (US).

(74) Agent: CARTER, Lawrence et al.; Shook, Hardy, & Bacon, L.L.P., 2555 Grand Boulevard, Kansas City, MO 64108 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: MARINE FUEL COMPOSITIONS WITH ACCEPTABLE WAX BEHAVIOR

(57) Abstract: Provided are marine fuel compositions having acceptable wax behavior. In one form, the marine fuel composition has the following enumerated properties: a kinematic viscosity at 50 °C of about 5 cSt to about 700 cSt; a wax endpoint temperature of less than about 100 °C; and a ratio of kinematic viscosity at 100 °C to operating viscosity greater than 1, wherein the operating viscosity is at least about 2 cSt. The marine fuel composition exists in a liquid phase with essentially all the wax in the composition melted (essentially free of solid wax) prior to fuel injection into a marine engine.

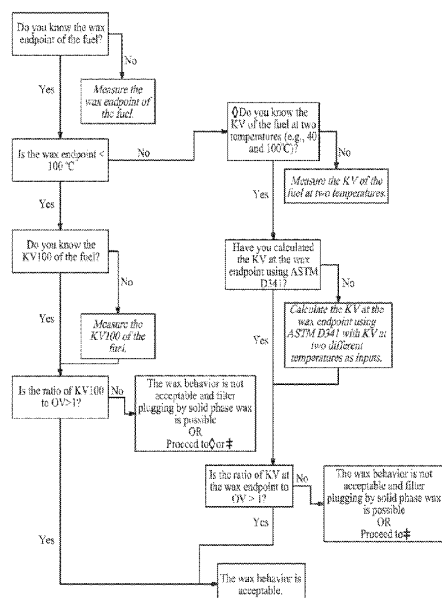


FIG. 1

Published:

— with international search report (Art. 21(3))