



(51) International Patent Classification:
F16L 37/244 (2006.01)

(21) International Application Number:

PCT/NL2010/050845

(22) International Filing Date:

14 December 2010 (14.12.2010)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

2004010 23 December 2009 (23.12.2009) NL
61/289,769 23 December 2009 (23.12.2009) US

(71) Applicants (for all designated States except US): **IHC HOLLAND IE B.V.** [NL/NL]; Molendijk 94, NL-3361 EP Sliedrecht (NL). **DE JONG, , Laurens, Jan** [NL/NL]; Achterom 123, NL-2611 PM Delft (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SCHALKX, Erwin, Ruben** [NL/NL]; Prins Hendriklaan 27, NL-3135 ZA Vlaardingen (NL). **POPPELIER, Leonardus, Maria**

[NL/NL]; Broekwal 14, NL-5268 HC Helvoirt (NL). **BOOMSMA, Wiebrand, Bernardus, Adriaan** [NL/NL]; Tjaskerlaan 42, NL-3052 HR Rotterdam (NL).

(74) Agent: **SWINKELS, Bart**; J.W. Frisolaan 13, NL-2517 JS The Hague (NL).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

[Continued on next page]

(54) Title: COUPLING FOR THE RELEASABLE COUPLING OF PIPES

Fig 2

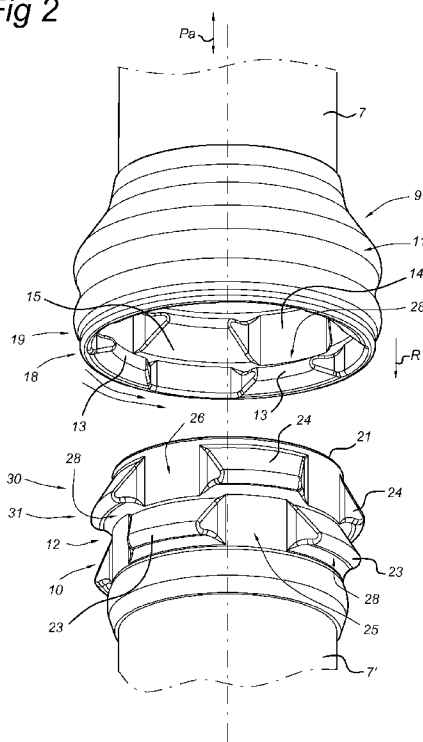

(57) Abstract: The invention relates to a coupling (8) for the releasable coupling of pipe parts, the coupling (8) comprising: a first pipe part (9), which on the inner circumference has two or more rows (18, 19) of lugs (13, 15); a second pipe part (10), which on the outer circumference has two or more rows (30, 31) of lugs (23, 24); wherein the lugs (13, 15, 23, 24) of each of the rows (18, 19, 30, 31) of the first pipe part (9) and of the second pipe part (10) have interspaces (12, 14, 25, 26) which are designed to allow lugs of one pipe part to pass the lugs of the other pipe part for sliding of the pipe parts (9, 10) into and out of one another in the axial direction, and wherein the pipe parts (9, 10), in the slid-together state, can be twisted in the tangential direction to make the lugs (13, 15) of the first pipe part (9) engage on the lugs (23, 24) of the second pipe part (10) for fixing of the pipe parts (9, 10) in the axial direction.



EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*