

(43) International Publication Date
5 April 2012 (05.04.2012)(10) International Publication Number
WO 2012/044384 A2(51) International Patent Classification:
F16M 11/18 (2006.01) *H01Q 3/00* (2006.01)(21) International Application Number:
PCT/US2011/041827(22) International Filing Date:
24 June 2011 (24.06.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/358,938 27 June 2010 (27.06.2010) US
61/452,639 14 March 2011 (14.03.2011) US(71) Applicant (for all designated States except US): SEA
TEL, INC. [US/US]; 4030 Nelson Avenue, Concord, CA
94520 (US).

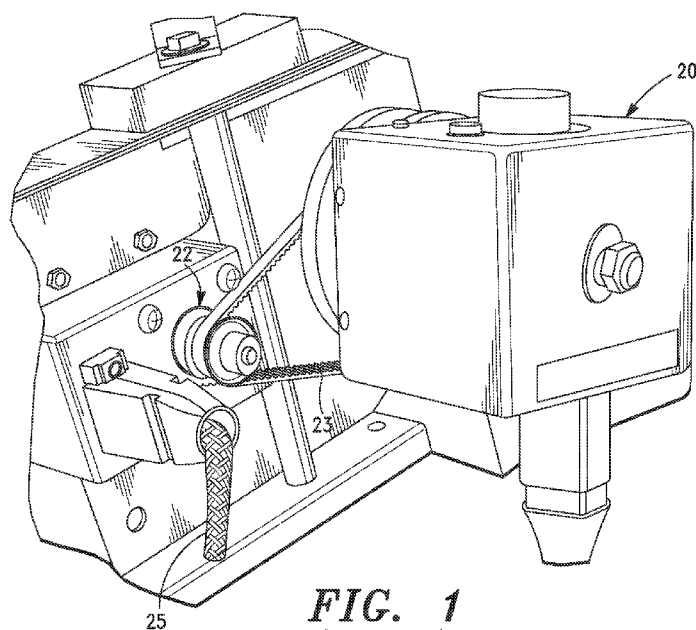
(72) Inventor; and

(75) Inventor/Applicant (for US only): BLANEY, Peter [US/
US]; Sea Tel, Inc., 4030 Nelson Avenue, Concord, CA
94520 (US).(74) Agents: JOHNSON, Victor E. et al.; Morgan, Lewis &
Bockius, LLP, One Market, Spear Street Tower, San
Francisco, CA 94105 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: THREE-AXIS PEDESTAL HAVING MOTION PLATFORM AND PIGGY BACK ASSEMBLIES

**FIG. 1**
(PRIOR ART)

(57) Abstract: A rotationally-stabilizing tracking antenna system suitable for mounting on a moving structure includes a three-axis pedestal for supporting an antenna about a first azimuth axis, a second cross-level axis, and a third elevation axis, a three-axis drive assembly for rotating a vertical support assembly relative to a base assembly about the first azimuth axis, a cross-level driver for pivoting a cross-level frame assembly relative to the vertical support assembly about the second cross-level axis, and an elevation driver for pivoting an elevation frame assembly relative to the cross-level frame assembly about the third elevation axis, a motion platform assembly affixed to and movable with the elevation frame assembly, three orthogonally mounted angular rate sensors disposed on the motion platform assembly for sensing motion about predetermined X, Y and Z axis of the elevation frame assembly, a three-axis gravity accelerometer mounted on the motion platform assembly and configured to determine a true-gravity zero reference, and a control unit for determining the actual position of elevation frame assembly based upon the sensed motion about said predetermined X, Y, and Z axes and said true-gravity zero reference, and for controlling the azimuth, cross-level and elevation drivers to position the elevation frame assembly in a desired position. In-

stead of or in addition to the motion platform assembly, the antenna system may include primary and secondary antenna affixed relative to the cross-level frame assembly and a control unit for selecting operation of a selected one of the primary and secondary antennas, determining the actual position of elevation frame assembly based upon the sensed motion about said predetermined X, Y, and Z axes, and for controlling the azimuth, cross-level and elevation drivers to position the selected one of the primary and secondary antennas in a desired position for tracking a communications satellite, Methods of using the three-axis pedestal having motion platform assembly is also described.