

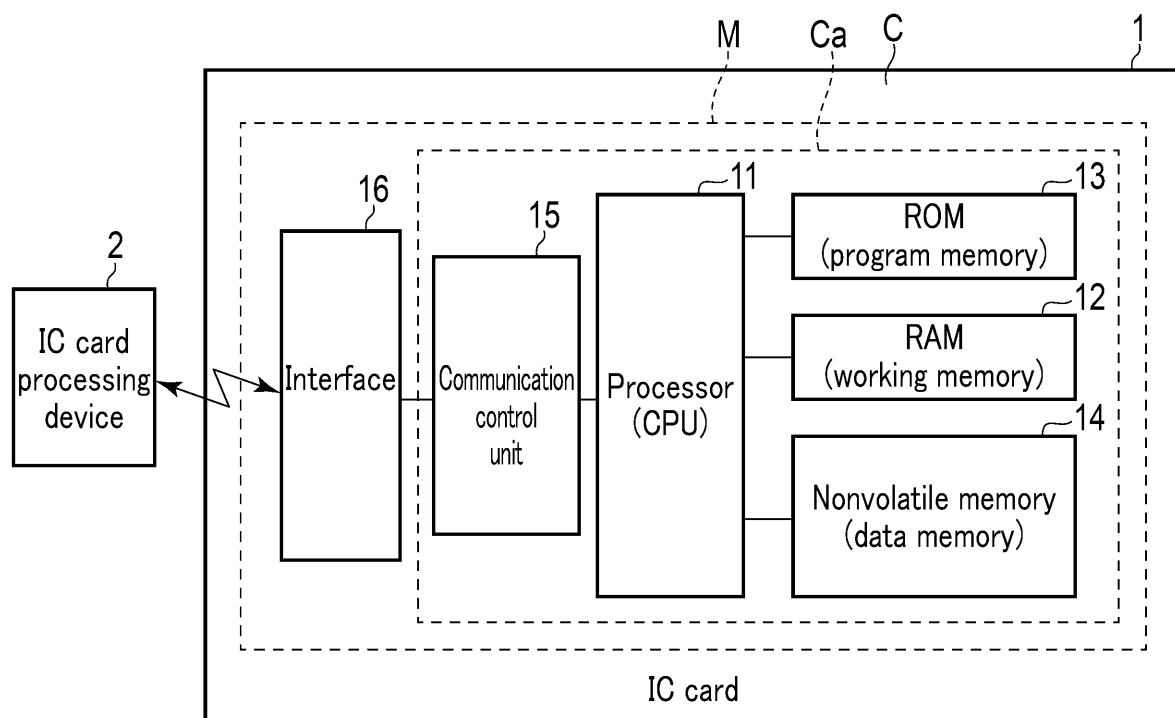


FIG. 1

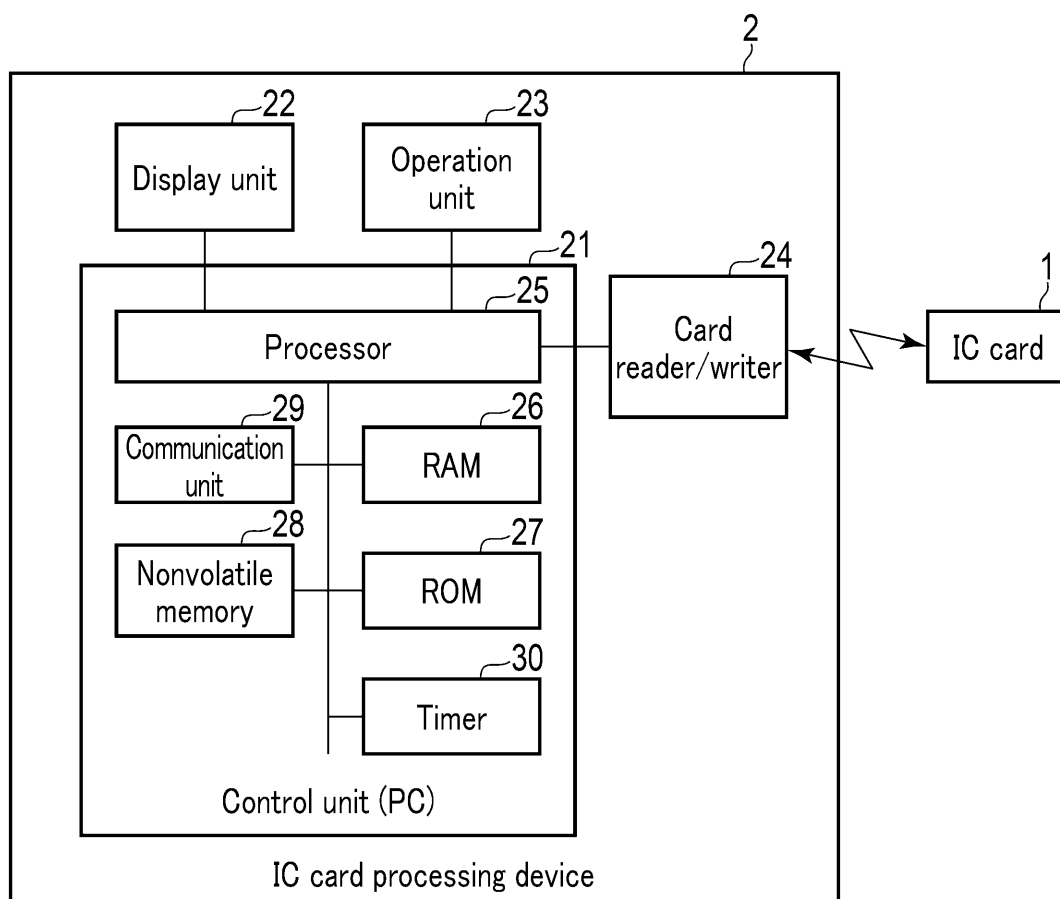


FIG. 2

Application	Tb_max	Tb_min	Tu	Option
Application 1	xx	--	xx	
Application 2	--	xx	xx	
Application 3	xx	xx	xx	

FIG. 3

Command	Tb_max	Tb_min	Tu	Option
read binary	xx	--	xx	
Update binary	--	xx	xx	
read record	xx	xx	xx	
Update record	xx	xx	xx	

FIG. 4

Automatic adjustment parameter			
	Level 1	Level 2	Level 3
Non-contact communication	AA	BB	CC
Contact communication	DD	EE	FF

FIG. 5

Adjustment parameter of delay due to writing				
	Memory level 1	Memory level 2	Memory level 3	Delay state
Delay adjustment value	GG	HH	II	Level 1

FIG. 6

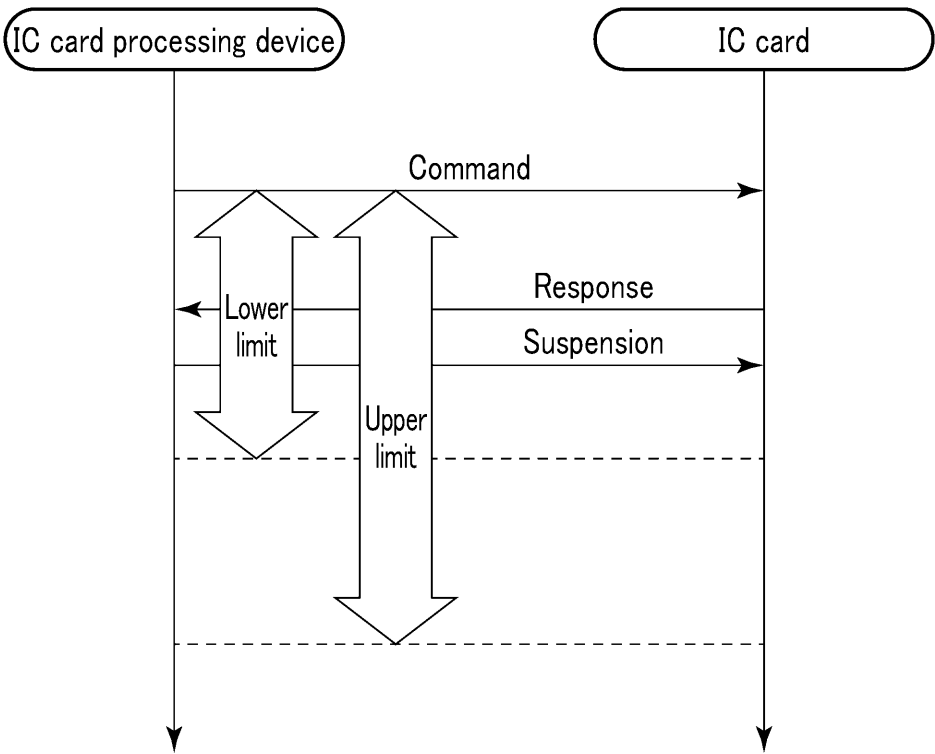


FIG. 7

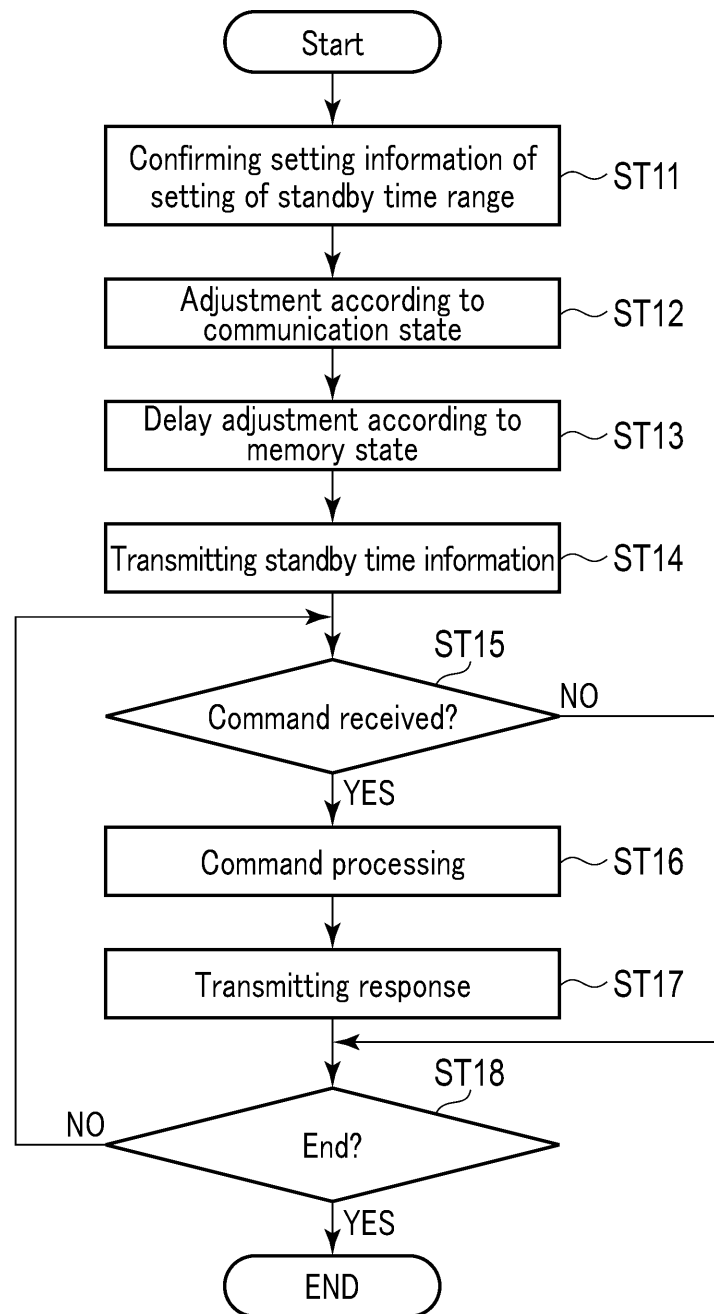


FIG. 8

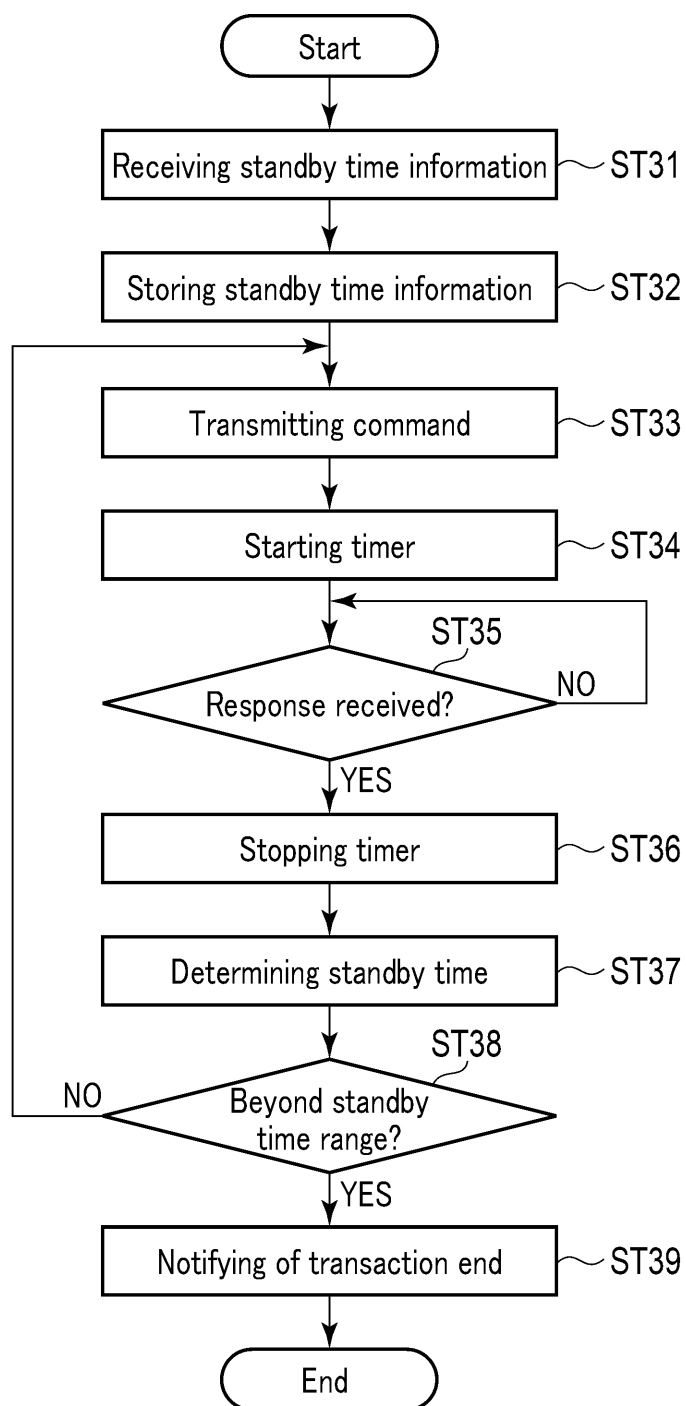


FIG. 9