



(51) International Patent Classification:
E05B 21/06 (2006.01)

(21) International Application Number:
PCT/FI2010/051006

(22) International Filing Date:
8 December 2010 (08.12.2010)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:
20105001 4 January 2010 (04.01.2010) FI

(71) Applicant (for all designated States except US): **ABLOY OY** [FI/FI]; Wahlforssinkatu 20, FI-80100 Joensuu (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KIISKI, Seppo** [FI/FI]; Viskaalintie 8, FI-80230 Joensuu (FI).

(74) Agent: **AWEK INDUSTRIAL PATENTS LTD OY**; PL 230, Lautatarhankatu 6, FI-00101 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,


CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: DISC TUMBLER CYLINDER LOCK AND KEY COMBINATION

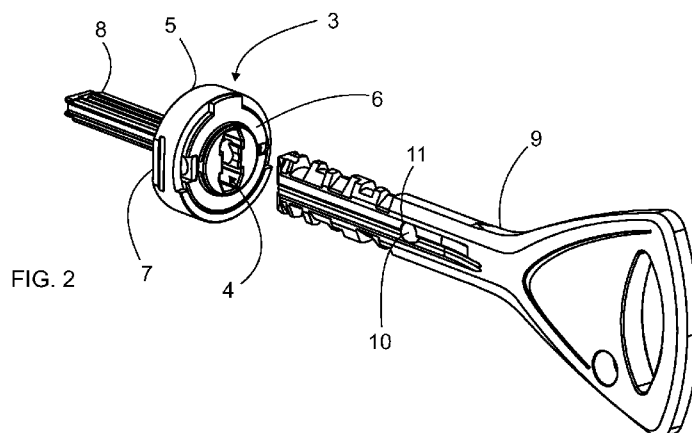

(57) Abstract: The invention relates to a disc tumbler cylinder lock and key combination. The disc tumbler cylinder lock (1) of the combination comprises rotation limiting means (3) of the key, and the key (9) comprises guidance surfaces (10) for the rotation limiting means. The rotation limiting means comprise a frame (6), which comprises a key profile opening (4), and a casing (5), which at least partially surrounds the frame. The frame (6) comprises a limiting mechanism (24) and a locking mechanism (25), which are disposed in a line such that the limiting mechanism is on the other side of the key profile opening (4) and the locking mechanism (25) is on the opposite side of the key profile opening.

