

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 August 2004 (12.08.2004)

PCT

(10) International Publication Number
WO 2004/067852 A1

(51) International Patent Classification⁷:
E03B 3/04, E02B 11/00, F04D 13/08

E02B 9/04,

(74) Agents: **WATANABE, Isamu** et al.; GOWA Nishi-Shinjuku 4F, 5-8, Nishi-Shinjuku 7-chome, Shinjuku-ku, Tokyo 160-0023 (JP).

(21) International Application Number:

PCT/JP2004/000854

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 29 January 2004 (29.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2003-023758

31 January 2003 (31.01.2003) JP

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): **EBARA CORPORATION** [JP/JP]; 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **SASAKI, Akira** [JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP). **OBA, Takanobu** [JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP). **MORI, Kenichi** [JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP). **KATO, Keiji** [JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP).

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WATER-INTAKE APPARATUS AND DRAINAGE APPARATUS

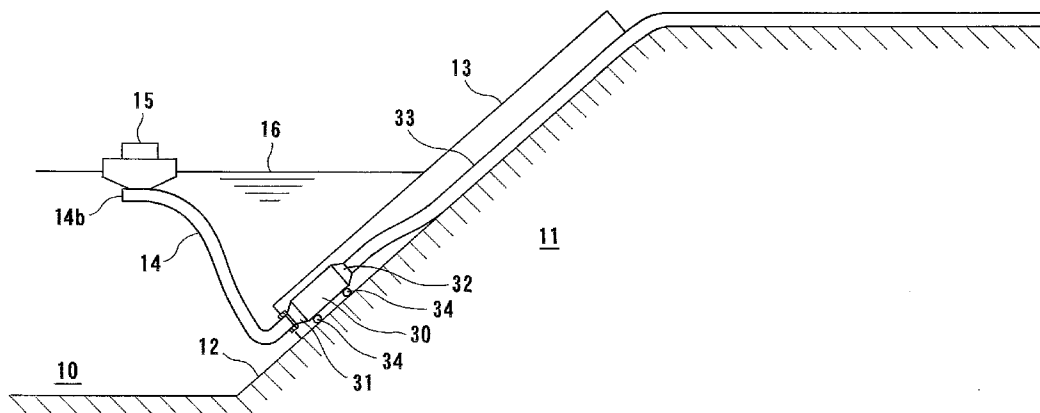

(57) Abstract: A water-intake apparatus is used for taking water in from a river or the like. The water-intake apparatus includes an equipment installation tube (13) having a lower end submerged in water and an upper end positioned above a water surface, a submersible motor pump (30) provided in the equipment installation tube (13), a suction pipe (14) connected to a suction port of the submersible motor pump (30), and a delivery pipe (33) connected to a discharge port (32) of the submersible motor pump (30) and extending through the equipment installation tube (13) to a predetermined location. The water-intake apparatus further includes a floating apparatus for supporting a suction port of the suction pipe (14) in the water

WO 2004/067852 A1