

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
9 August 2001 (09.08.2001)

PCT

(10) International Publication Number
WO 01/57559 A1

(51) International Patent Classification⁷: **G02B 5/08**,
27/00, F24J 2/00

(21) International Application Number: PCT/US00/02625

(22) International Filing Date: 2 February 2000 (02.02.2000)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **TRIV-
IUM TECHNOLOGIES, INC.** 30370 Hilliard Road
[—/US]; Westlake, OH 44145 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CLIKEMAN,
Richard, W.** [US/US]; 4300 Yucantan Lane, Austin,
TX 78727 (US). **LUBART, Neil, D.** [US/US]; 10707
Copper Hill Drive, Austin, TX 78728 (US). **MAYFIELD,
Charles, R.** [US/US]; 4300 Yucatan Lane, Austin, TX
78727 (US).

(74) Agent: **EARP, Robert, H., III**; Benesch, Friedlander,
Coplan & Aronoff LLP, 2300 BP Tower, 200 Public
Square, Cleveland, OH 44114-2378 (US).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,
UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:


— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: MULTIFLECTING LIGHT DIRECTING FILM

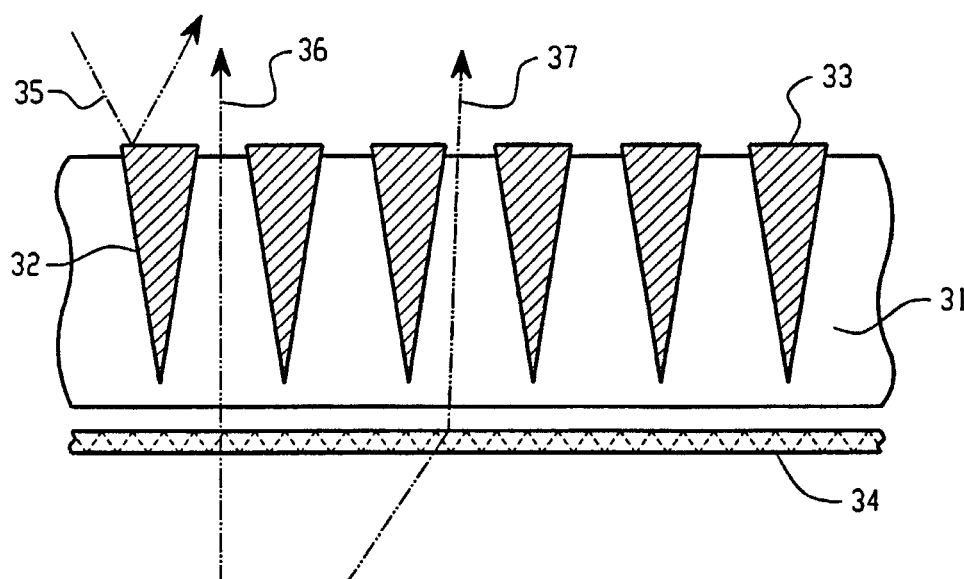

(57) Abstract: A translector which simultaneously maximizes light reflectivity from one side of the translector while maximizing light transmissivity from the opposite side of the translector. This is achieved by configuring the translector with distinct regions of transparency and reflectivity. The translector is composed of a transparent material (31), serving as a body, for transmitting light ray (36) therethrough. The translector further includes reflective regions (32) composed of a reflective material (33), such as aluminum or silver, for reflecting light ray (35) away from the translector.



WO 01/57559 A1