27/09/02
20020596 65

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number
WO 01/75438 A3

(51) International Patent Classification[7]: G01N 33/487, 27/30, C12Q 1/54, 1/00

(21) International Application Number: PCT/US01/09471

(22) International Filing Date: 23 March 2001 (23.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/540,319 31 March 2000 (31.03.2000) US

(71) Applicant: LIFESCAN, INC. [US/US]; 1000 Gibraltar Drive, Milpitas, CA 95035 (US).

(72) Inventors: SHARTLE, Robert, Justice; 1264 Geneve Court, Livermore, CA 94550 (US). OHARA, Timothy, J.; 2652 Celaya Circle, San Ramon, CA 94583 (US). KERMANI, Mahyar, Z.; 3154 Gulfstream Street, Pleasanton, CA 94588 (US).


(74) Agent: JOHNSON, Philip, S.; Johnson & Johnson, One Johnson & Johnson Plaza, New Brunswick, NJ 08933 (US).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTRICALLY-CONDUCTIVE PATTERNS FOR MONITORING THE FILLING OF MEDICAL DEVICES

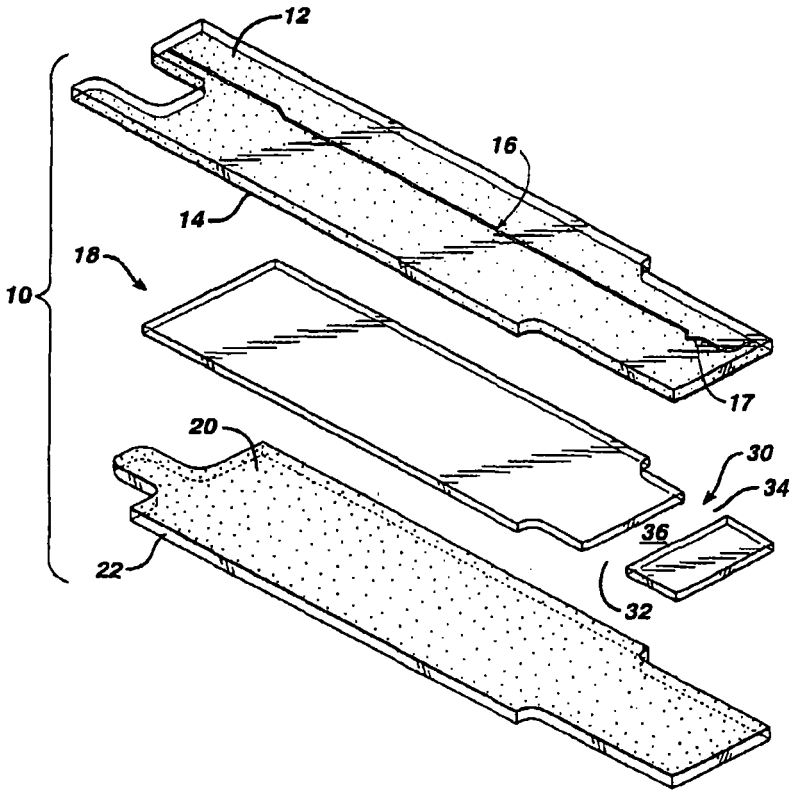

(57) Abstract: A flexible diagnostic device has a measurement cell that is sandwiched between the conductive surfaces of two conductive-coated insulating layers. At least one of the conductive surfaces is scored with an insulating pattern, so that the flow of a conductive fluid sample into the cell can be monitored.

WO 01/75438 A3

162162

ACTION

Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:
13 June 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.