

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
3 October 2002 (03.10.2002)

PCT

(10) International Publication Number
WO 02/077901 A3

- (51) International Patent Classification⁷: **H01H 9/28** (74) Agent: **RADLER, Daniel, G.**; Quarles & Brady LLP, 411 East Wisconsin Avenue, Milwaukee, WI 53202 (US).
- (21) International Application Number: PCT/US02/08084
- (22) International Filing Date: 18 March 2002 (18.03.2002)
- (25) Filing Language: English (81) Designated States (*national*): AU, KR, SG, US.
- (26) Publication Language: English (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (30) Priority Data: 60/277,497 21 March 2001 (21.03.2001) US Published: — with international search report
- (71) Applicant (*for all designated States except US*): **BRADY WORLDWIDE, INC.** [US/US]; 2221 West Camden Road, Milwaukee, WI 53209 (US). (88) Date of publication of the international search report: 16 October 2003
- (72) Inventor; and (75) Inventor/Applicant (*for US only*): **BENDA, Steven, J.** [US/US]; 13657 10th Street SW, Cokato, MN 55321 (US). *For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: CIRCUIT BREAKER LOCK-OUT ASSEMBLY

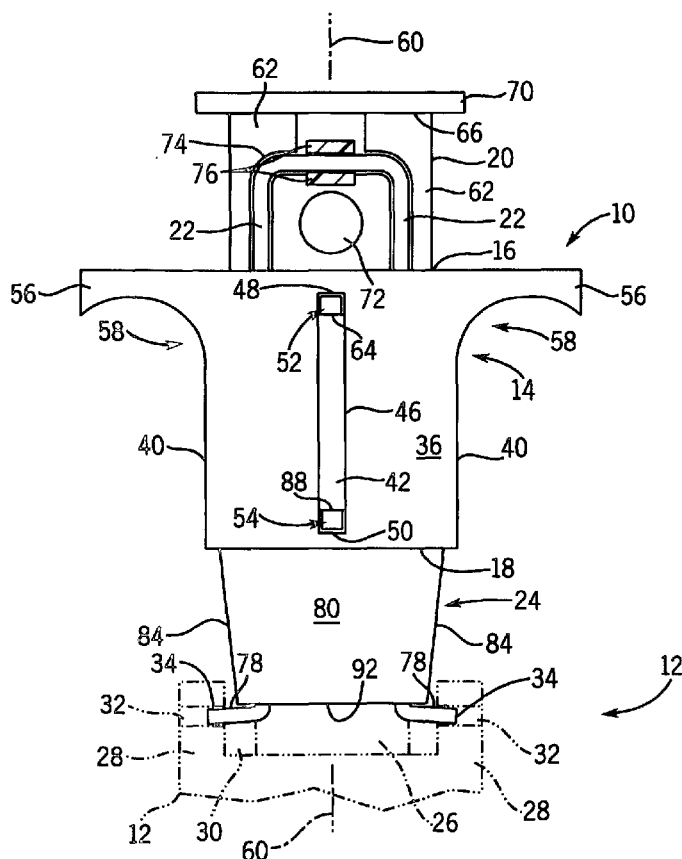

(57) Abstract: A circuit breaker lock-out assembly (10) which is engageable with a circuit breaker (12) includes a body (14) having a top (16) and a bottom (18) joined by walls (36, 38, 40). The walls (36, 38, 40) define a passageway (42) extending from the body top (16) to the body bottom (18). A button (20) having one end extending into the body passageway (42) through the body top (16) is movable between a lock position and an unlock position. A pair of leaf springs (22) are fixed to the button (20) and extend through the body passageway (42). A nose (24) extends from each of the leaf springs (22). Each pin (34) is engageable with a hole (32) formed in the circuit breaker walls (36, 38, 40) adjacent the switch tongue (26), wherein slidable movement of the button (20) toward at least one of the lock position and unlock position engages the leaf spring (22) with the nose (24) to move each pin (34) relative to the hole (32).