(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
18 March 2004 (18.03.2004)

PCT

(10) International Publication Number
WO 2004/022164 A2

(51) International Patent Classification[7]: A62B

(21) International Application Number:
PCT/IL2003/000732

(22) International Filing Date:
4 September 2003 (04.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/237,034 9 September 2002 (09.09.2002) US

(71) Applicant *(for all designated States except US)*: **RESHAFIM (METAL DOORS) LTD.** [IL/IL]; South Industrial Zone, P.O.B. 592, 78104 Ashkelon (IL).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: **BARZILAI, Yoav** [IL/IL]; 54 Ha'atzmaut St., 78441 Ashkelon (IL). **SALHOV, Rafi** [IL/IL]; 101 Zvi Segal St., 78488 Ashkelon (IL).

(74) Agent: **FRIEDMAN, Mark, M.**; DR. MARK FRIEDMAN LTD., 7 Haomanim Street, 67897 Tel Aviv (IL).

(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: EMERGENCY ESCAPE SYSTEM

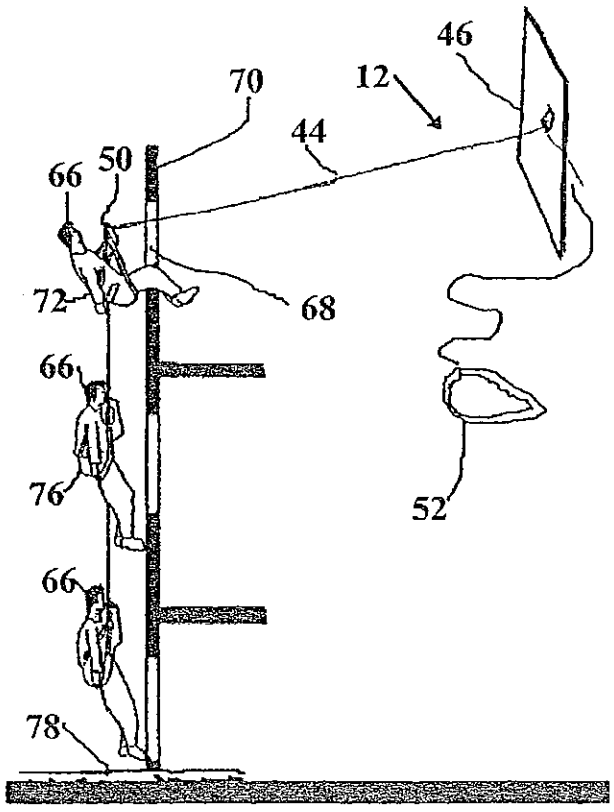

(57) Abstract: An emergency escape system includes an escape apparatus and a hollow door. A majority of the escape apparatus is storable within an internal volume of the door. A part of the door is removalbe in order to access the escape apparatus. The escape apparatus includes a cord and a release mechanism. The release mechanism is configured to provide a controlled lowering of a person being lowered on the cord.

WO 2004/022164 A2