

22 APR 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 August 2003 (21.08.2003)


PCT

(10) International Publication Number
WO 2003/069756 A3

- (51) International Patent Classification⁷: **G08B 21/00**
- (21) International Application Number:
PCT/US2003/003500
- (22) International Filing Date: 4 February 2003 (04.02.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/075,479 12 February 2002 (12.02.2002) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 10/075,479 (CON)
Filed on 12 February 2002 (12.02.2002)
- (71) Applicant (for all designated States except US): **PINNA-
CLE WEST CAPITAL CORPORATION** [US/US]; 400
North Fifth Street, P.O. Box 53999, Phoenix, AZ 85072-
3999 (US).
- (72) Inventor; and
(75) Inventor/Applicant (for US only): **HAYDEN, Herbert,
T.** [US/US]; 701 West Parkway Boulevard, Tempe, AZ
85281 (US).
- (74) Agents: **GRESHAM, Lowell, W.** et al.; Meschkow
& Gresham, PLC, Suite 409, 5727 N. Seventh Street,
Phoenix, AZ 85014 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SENSOR LOOP WITH DISTRIBUTED POWER SOURCES AND METHOD THEREFOR

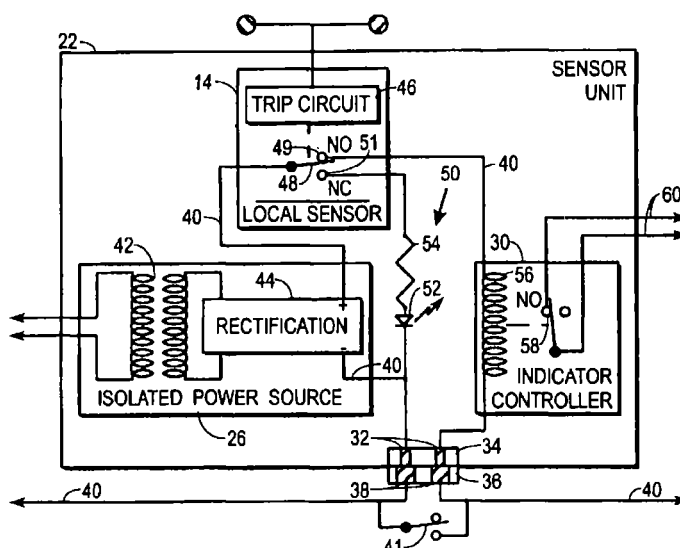

162162



ACTION

WO 2003/069756 A3

(57) Abstract: A fail-safe electrical control system in the form of a sensor loop (24) is provided. The sensor loop (24) includes any number of sensor units (22) coupled in series. Each sensor unit (22) includes a local power source (26), a local sensor (14), and a local indicator controller (30). The local power source (26), local sensor (14), and local indicator controller (30) are coupled in series within the sensor unit (22) and the sensor loop (24) to form a closed circuit (40) that does not require a central controller or the performance of loop configuration activities. The local power sources (26) distributed throughout the sensor loop (24) within the sensor units (22) are all isolated from the earth. In one preferred embodiment, the sensor loop (24) controls the movement of solar collectors (12) into wind stow positions when high wind (16) conditions occur.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(15) Information about Correction:

Previous Correction:

see PCT Gazette No. 50/2003 of 11 December 2003, Section II

(88) Date of publication of the international search report:

22 April 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.