



(51) International Patent Classification:
B65D 5/38 (2006.01) **B65D 85/10** (2006.01)
B65D 5/72 (2006.01)

(21) International Application Number:
PCT/EP2009/009010

(22) International Filing Date:
18 November 2009 (18.11.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
08253966.9 11 December 2008 (11.12.2008) EP

(71) Applicant (for all designated States except US): **PHILIP MORRIS PRODUCTS S.A.** [CH/CH]; Quai Jeanrenaud 3, CH-2000 Neuchâtel (CH).

(72) Inventor: **CHATELAIN, Lucas**; Eden Roc 11, CH-1073 Savigny (CH).

(74) Agent: **TAYLOR, Gillian, Claire**; Reddie & Grose, 16 Theobalds Road, London WC1X 8PL (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: CONTAINER WITH ADDITIONAL EXTERNAL PANEL

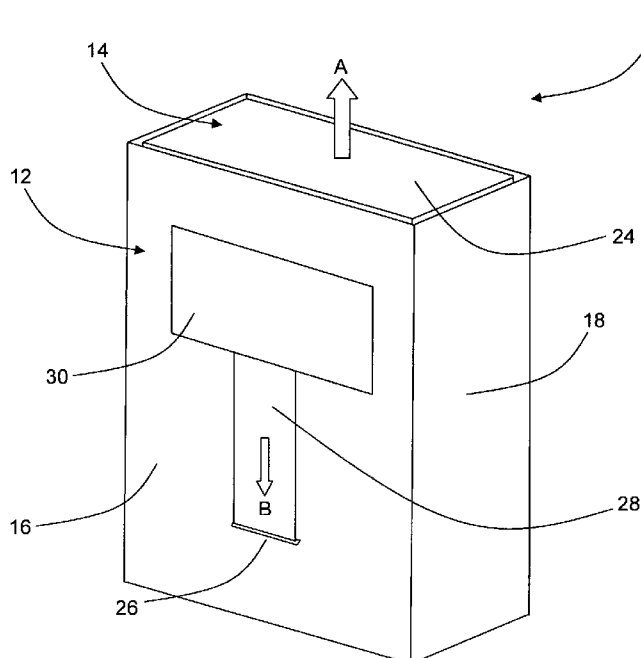


Figure 1

(57) Abstract: A container (10) comprises an outer sleeve (12); an inner housing (14) contained within the outer sleeve (12) and moveable relative thereto between a closed position and an open position; an external panel (30) visible on the outer sleeve (12) and mounted for movement along a first wall (16) of the outer sleeve (12); and a linking device (28) connecting the external panel (30) to the inner housing (14) such that movement of the inner housing (14) between the closed position and the open position brings about movement of the external panel (30) along the first wall (16) of the outer sleeve (12).



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*