

(51) International Patent Classification:
H02J 13/00 (2006.01) *E21B 29/12* (2006.01)(21) International Application Number:
PCT/US2011/036840(22) International Filing Date:
17 May 2011 (17.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/815,547 15 June 2010 (15.06.2010) US(71) Applicant (for all designated States except US):
CAMERON INTERNATIONAL CORPORATION
[US/US]; 1333 West Loop South, Suite 1700, Houston,
Texas 77027 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BURDICK, John, F.**
[US/US]; 308 Garden Drive, Friendswood, Texas 77546
(US).(74) Agent: **ROSE, Collin, A.**; Conley Rose, P.C., P.O. Box
3267, Houston, Texas 77253-3267 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: POWER SUPPLY SYSTEM AND METHOD WITH REMOTE VARIABLE FREQUENCY DRIVE (VFD)

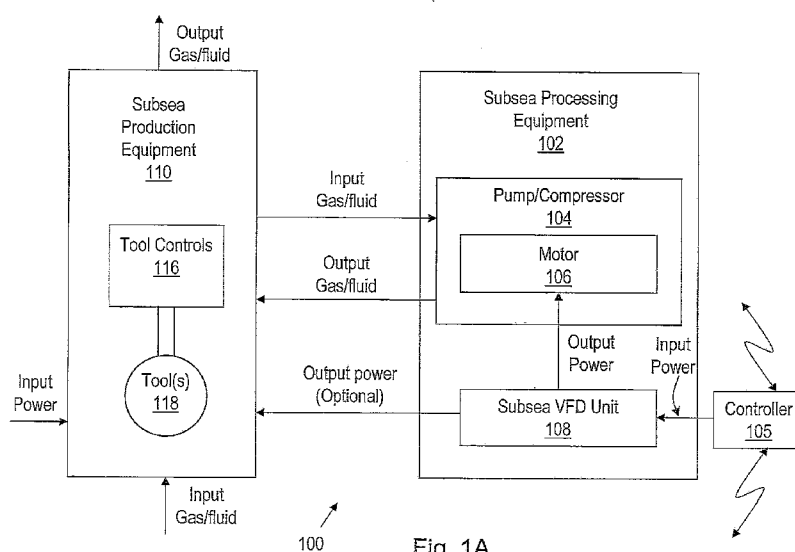


Fig. 1A

(57) Abstract: In at least some embodiments, a system includes a first remote tool. The system also includes a variable frequency drive (VFD) coupled to the first remote tool, wherein the output of the VFD powers the first tool and wherein at least part of the VFD is in situ with the first remote tool.