

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
14 December 2000 (14.12.2000)

PCT

(10) International Publication Number
WO 00/76047 A1

- (51) International Patent Classification⁷: H02H 3/00, (74) Agents: BLASEY, Thomas, M. et al.; Hunton & Williams, 1900 K Street, N.W., Washington, DC 20006 (US).
G01R 19/25
- (21) International Application Number: PCT/US00/15104
- (22) International Filing Date: 2 June 2000 (02.06.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/324,664 3 June 1999 (03.06.1999) US
- (71) Applicant: GENERAL ELECTRIC COMPANY
[US/US]; 1 River Road, Schenectady, NY 12345 (US).
- (72) Inventors: KULIDJIAN, Ara; 176 Joicey Boulevard, Toronto, Ontario M5M 2V2 (CA). MAZEREEUW, Jeff; 497 Devanjan Circle, Newmarket, Ontario L3Y 8H9 (CA).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published: — With international search report.


[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR DERIVING POWER SYSTEM DATA FROM CONFIGURABLE SOURCE POINTS



162162

WO 00/76047 A1

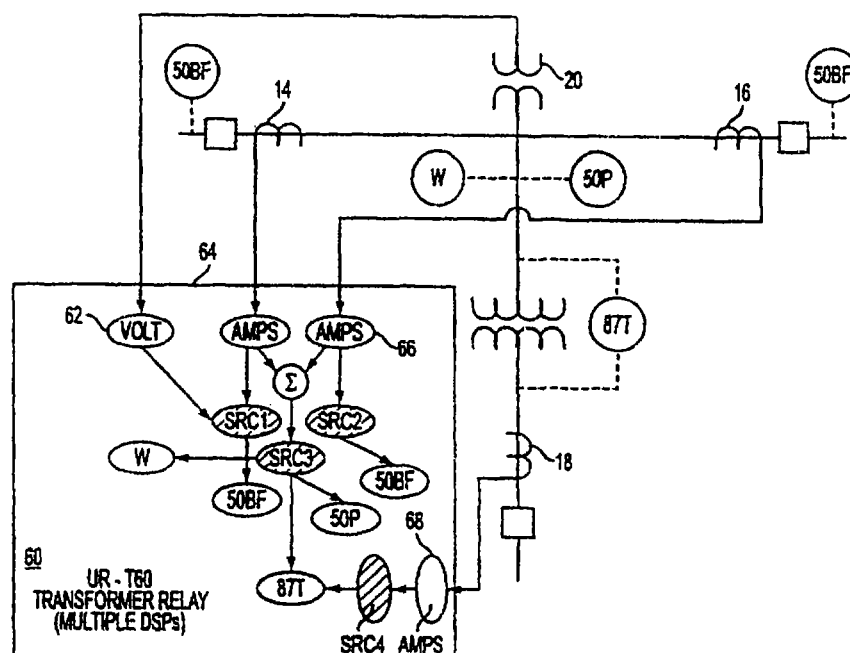

(57) Abstract: A protective relay that derives and processes power system data from multiple user-configurable data source points. Data from multiple source points can be combined in the relay as a single source of data useful to perform a wide variety of monitoring and protection tasks. Multiple digital signal processing modules can be used to provide additional processing resources, including the ability to provide protection and revenue-class metering in a single device.