



- (51) **International Patent Classification:**
E21B 19/24 (2006.01) *E21B 17/10* (2006.01)
- (21) **International Application Number:**
PCT/US2012/046812
- (22) **International Filing Date:**
13 July 2012 (13.07.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant** (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, Texas 77072 (US).
- (72) **Inventor; and**
- (75) **Inventor/Applicant** (for US only): **HAY, Richard Thomas** [CA/US]; 24915 Corbin Gate Drive, Spring, Texas 77389 (US).
- (74) **Agents:** **CONLEY ROSE, P.C.** et al.; 5601 Granite Parkway, Ste. 750, Plano, Texas 75024 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** PIPE IN PIPE PISTON THRUST SYSTEM

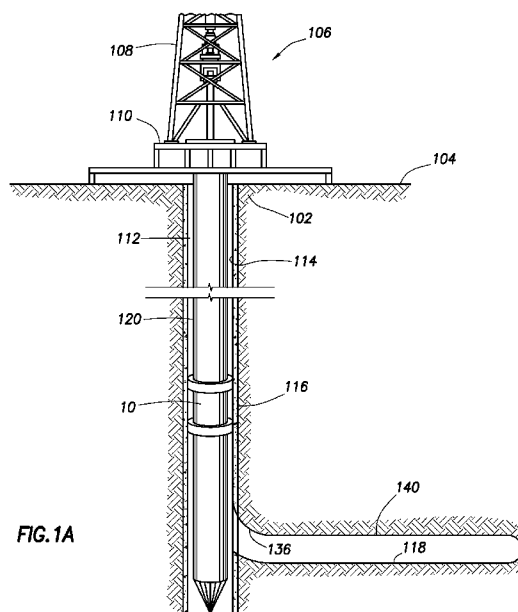


FIG. 1A

(57) **Abstract:** A pipe in pipe piston thrust system comprises a plurality of piston assemblies configured to sealingly engage a wellbore, a pump configured to transfer a fluid into the wellbore, and a by-pass disposed between a plurality of annuli formed by the plurality of piston assemblies. The by-pass allows for selective communication of the fluid between the plurality of annuli.

