

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number
WO 2004/033597 A2

(51) International Patent Classification⁷: **C10G 65/04**

(21) International Application Number:
PCT/US2003/033320

(22) International Filing Date: 7 October 2003 (07.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/416,865 8 October 2002 (08.10.2002) US

(71) Applicant: **EXXONMOBIL RESEARCH AND ENGINEERING COMPANY** [US/US]; 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventors: **CODY, Ian, A.**; 19516 Cape Hart Court, Baton Rouge, LA 70809 (US). **MURPHY, William, J.**; 224 Highland Trace Drive, Baton Rouge, LA 70810 (US). **HANTZER, Sylvain, S.**; 37620 Seven Oaks Avenue, Prairieville, LA 70769 (US). **LARKIN, David, W.**; 2508

Gates Circle, Apt. 13, Baton Rouge, LA 70809 (US). **GALLAGHER, John, E., Jr.**; 9701 Thorn Bush Drive, Fairfax Station, VA 22039 (US). **KIM, Jeenok, T.**; 12709 Laurel Grove Way, Fairfax, VA 22033 (US).


(74) Agents: **KLIEBERT, Jeremy, J.** et al.; Exxonmobil Research and Engineering Company, 1545 Route 22 East, P.O. Box 900, Annandale, NJ 08801-0900 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: PROCESS FOR PREPARING BASESTOCKS HAVING HIGH VI

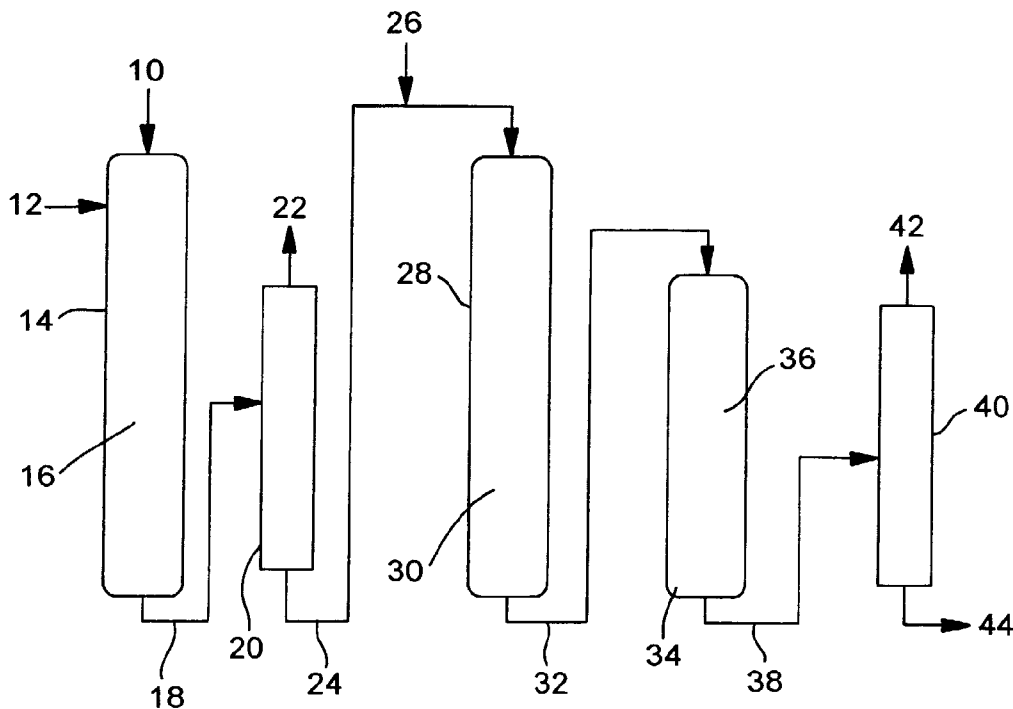

(57) Abstract: A process for preparing high VI lubricating oil basestocks comprising hydrotreating, hydrodewaxing and optionally hydrofinishing. The hydrotreating step is under conditions such that the amount of conversion to 343°C minus is less than 5wt% of the feedstock and the VI increase is less than 4 VI over the feedstock. Hydrodewaxing uses a low alpha catalyst and hydrofinishing is accomplished with a catalyst based on the M41S family.



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*