

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)


PCT

(10) International Publication Number
WO 2004/019656 A2

- (51) International Patent Classification⁷: **H04S** (71) Applicant (for all designated States except US): **DOLBY LABORATORIES LICENSING CORPORATION** [US/US]; 100 Potrero Avenue, San Francisco, CA 94103-4813 (US).
- (21) International Application Number: PCT/US2003/024570
- (22) International Filing Date: 6 August 2003 (06.08.2003) (72) Inventor; and (75) Inventor/Applicant (for US only): **DAVIS, Mark, Franklin** [US/US]; 100 Potrero Avenue, San Francisco, CA 94103-4813 (US).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/401,983 7 August 2002 (07.08.2002) US (74) Agents: **GALLAGHER, Thomas, A.** et al.; Gallagher & Lathrop, A Professional Corporation, Suite 1111, 601 California Street, San Francisco, CA 94108-2805 (US).
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier applications: (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
- US 60/401,983 (CON)
Filed on 7 August 2002 (07.08.2002)
US 60/267,284 (CIP)
Filed on 7 February 2001 (07.02.2001)

[Continued on next page]

(54) Title: AUDIO CHANNEL SPATIAL TRANSLATION

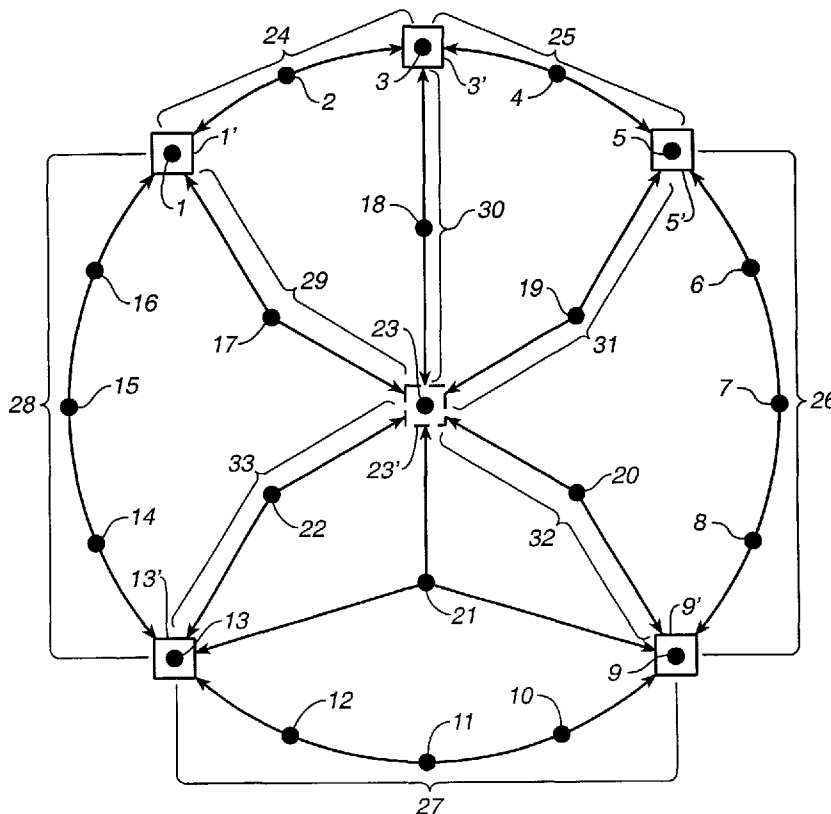

(57) Abstract: Using an M:N variable matrix, M audio input signals, each associated with a direction, are translated to N audio output signals, each associated with a direction, wherein N is larger than M, M is two or more and N is a positive integer equal to three or more. The variable matrix is controlled in response to measures of: (1) the relative levels of the input signals, and (2) the cross-correlation of the input signals so that a soundfield generated by the output signals has a compact sound image in the nominal ongoing primary direction of the input signals when the input signals are highly correlated, the image spreading from compact to broad as the correlation decreases and progressively splitting into multiple compact sound images, each in a direction associated with an input signal, as the correlation continues to decrease to highly uncorrelated.



LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.