20000985-4

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B67D 1/04

A1

(11) International Publication Number: WO 99/11563

(43) International Publication Date: 11 March 1999 (11.03.99)

(21) International Application Number: PCT/NL98/00508

(22) International Filing Date: 4 September 1998 (04.09.98)

(30) Priority Data:

1006949	4 September 1997 (04.09.97)	NL
1006950	4 September 1997 (04.09.97)	NL
60/057,814	4 September 1997 (04.09.97)	US
60/057,616	4 September 1997 (04.09.97)	US

(71) Applicant *(for all designated States except US)*: 'HEINEKEN TECHNICAL SERVICES B.V. [NL/NL]; 2e Weteringplantsoen 21, NL–1017 ZD Amsterdam (NL).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: TIMMERMANS, Sjoerd [NL/NL]; Antonie Duyckstraat 6, NL–2582 TK Den Haag (NL). VAN DER MEER, Sietze [NL/NL]; G. Sondermanstraat 27, NL–9203 TT Drachten (NL).

(74) Agent: SMULDERS, Th., A., H., J.; Vereenigde Octrooibureaux, Nieuwe Parklaan 97, NL–2587 BN The Hague (NL).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: ASSEMBLY FOR STORING AND DISPENSING BEER AND OTHER CARBONATED BEVERAGES

(57) Abstract
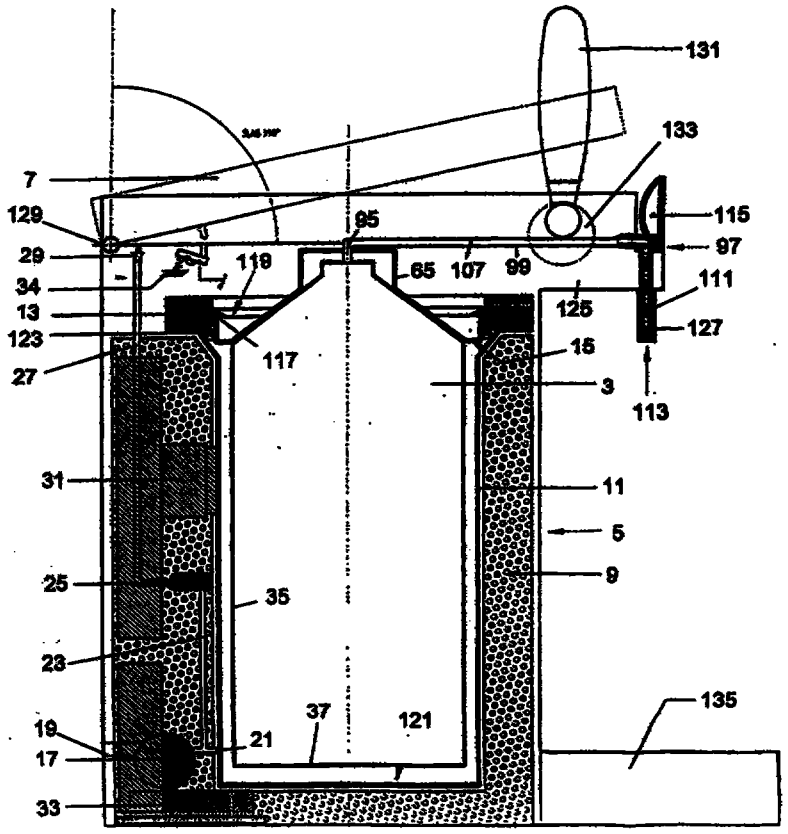
Assembly of a tapping device and a container for fluid, in particular beer or soft drink, to be dispensed via the tapping device, dispensing means being provided for the fluid, a pressure chamber being provided in the tapping device, in which pressure chamber, during use, the container extends at least partially, pressure means being provided for feeding a pressure medium into the pressure chamber for pressing, via the dispensing means, the fluid from the container without the pressure medium contacting the fluid, the pressure space during use being at least partially defined and closed to the environment by a closing part of the container, at a distance from the dispensing opening of the container, and the dispensing opening of the container being located outside the pressure chamber.