



- (51) International Patent Classification:
H01R 13/64 (2006.01) *H01R 13/639* (2006.01)
- (21) International Application Number:
PCT/US2013/031235
- (22) International Filing Date:
14 March 2013 (14.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/697,484 6 September 2012 (06.09.2012) US
- (71) Applicant: COOPER TECHNOLOGIES COMPANY
[US/US]; 600 Travis St., Suite 5600, Houston, TX 77002 (US).
- (72) Inventors: LEDGERWOOD, Adam D.; 100 Route 96, Geneva, NY 14456 (US). ALDRICH, Alvah; 527 Castle Street, Geneva, NY 14456 (US). OLIVER, Jason; 206 Savannah Walk, Peachtree City, GA 30269 (US).
- (74) Agent: NEUFELD, Robert T.; King & Spalding LLP, Attn: IP Docketing, 1100 Louisiana St., Suite 4000, Houston, TX 77002-5213 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: KEYWAY VISUAL ALIGNMENT FEATURE

FIG. 2

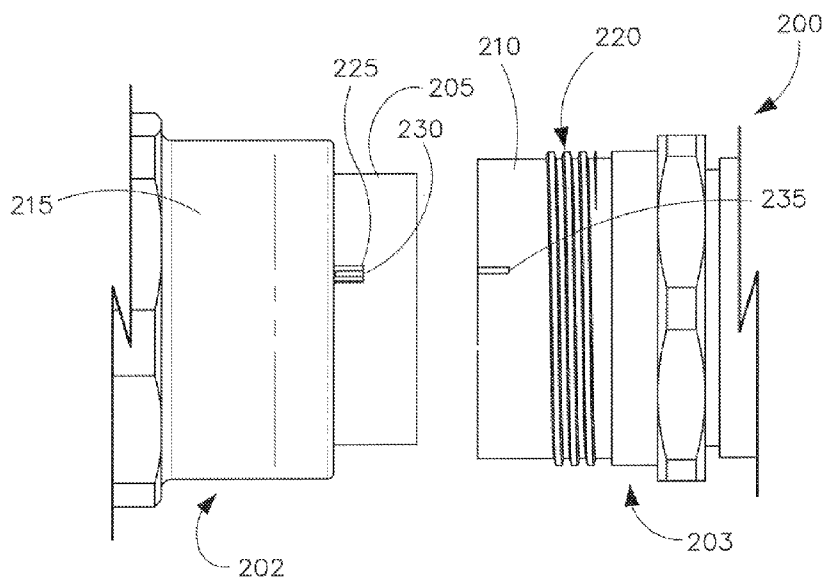

(57) Abstract: A high-amperage connector with visual alignment features is described. The connector can comprise a male connector or with a male skirt where the male skirt has two keys on an outer surface. At least one of the keys on the outer surface of the male skirt can have an alignment feature. The connector also comprises a female connector with a female skirt where the female skirt has two keyways on an inner surface of the female skirt. At least one of the keyways can have a corresponding alignment feature located on die outer surface of the female skirt. The alignment features on the male skirt and the female skirt allow a user to easily align the two connectors before connecting them.