PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : C08F	A2	(11) International Publication Number: **WO 99/60028**
		(43) International Publication Date: 25 November 1999 (25.11.99)

(21) International Application Number: PCT/US99/11007

(22) International Filing Date: 18 May 1999 (18.05.99)

(30) Priority Data:

09/080,412	18 May 1998 (18.05.98)	US
PCT US99/06102	19 March 1999 (19.03.99)	US

(81) Designated States: AU, CA, CN, IN, JP, KR, MX, SG, ZA, Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published
Without international search report and to be republished upon receipt of that report.

(71) Applicant: EXXON CHEMICAL PATENTS INC. [US/US]; 5200 Bayway Drive, Baytown, TX 77520–5200 (US).

(72) Inventors: KENDRICK, James, A.; 10314 Sagefield Drive, Baton Rouge, LA 70811 (US). TOWLES, Thomas, W.; 4647 Drusilla Drive, Baton Rouge, LA 70809 (US). ROGER, Scott, T.; 13690 Mill Dale Road, Zachary, LA 70791 (US).

(74) Agents: ALEXANDER, David, J. et al.; Exxon Chemical Company, P.O. Box 2149, Baytown, TX 77522–2149 (US).

(54) Title: CONTINUOUS SLURRY POLYMERIZATION VOLATILE REMOVAL

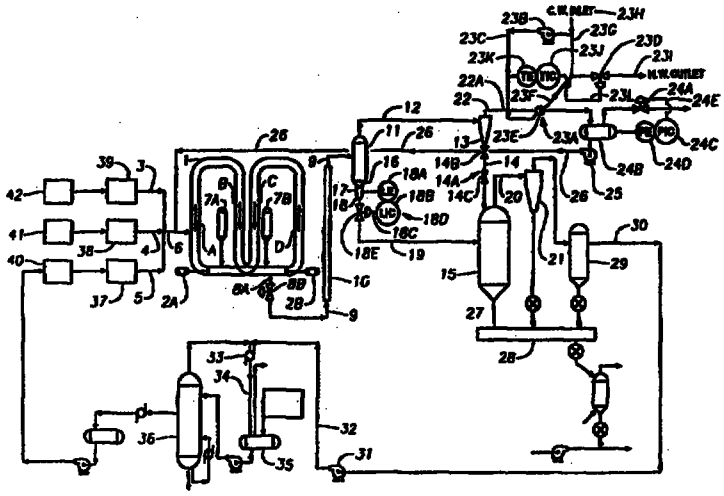

(57) Abstract

A process/apparatus is disclosed for continuously separating a liquid medium comprising diluent and unreacted monomers from a polymerization effluent comprising diluent, unreacted monomers and polymer solids, comprising a continuous discharge of the polymerization effluent from a slurry reactor through a discharge valve and transfer conduit into a first intermediate pressure flash tank with a conical bottom defined by substantially straight sides inclined at an angle to that of horizontal equal to or greater than the angle of slide of the slurry/polymer solids and an exit seal chamber of such diameter (d) and length (l) as to maintain a desired volume of concentrated polymer solids/slurry in the exit seal chamber such as to form a pressure seal while continuously discharging a plug flow of concentrated polymer solids/slurry bottom product of said first flash tank from the exit seal chamber through a seal chamber exit reducer with inclined sides defined by substantially straight sides inclined at an angle to that of horizontal equal to or greater than the angle of slide of the polymer solids which remain after removal of about 50 to 100 % of the inert diluent therefrom to a second flash tank at a lower pressure.