

27/12/02
2002 080 323

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



ACTION

(43) International Publication Date
3 January 2002 (03.01.2002)


PCT

(10) International Publication Number
WO 02/01679 A1

- (51) International Patent Classification⁷: **H01R 29/00** (74) Agents: HAYES, Oliver, W. et al.; Hayes, Soloway, Hennessey, Grossmna & Hage, 175 Canal Street, Manchester, NH 03101 (US).
- (21) International Application Number: PCT/US01/20534
- (22) International Filing Date: 28 June 2001 (28.06.2001) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/214,580 28 June 2000 (28.06.2000) US
- (71) Applicant: **TRU-CONNECTOR CORPORATION**
[US/US]; 245 Lynnfield Street, Peabody, MA 01960 (US).
- (72) Inventor: **KOCH, Richard, M.**; c/o Tru-Connector Corporation, 245 Lynnfield Street, Peabody, MA 01960 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ELECTRICAL CONNECTOR WITH SWITCH-ACTUATING SLEEVE

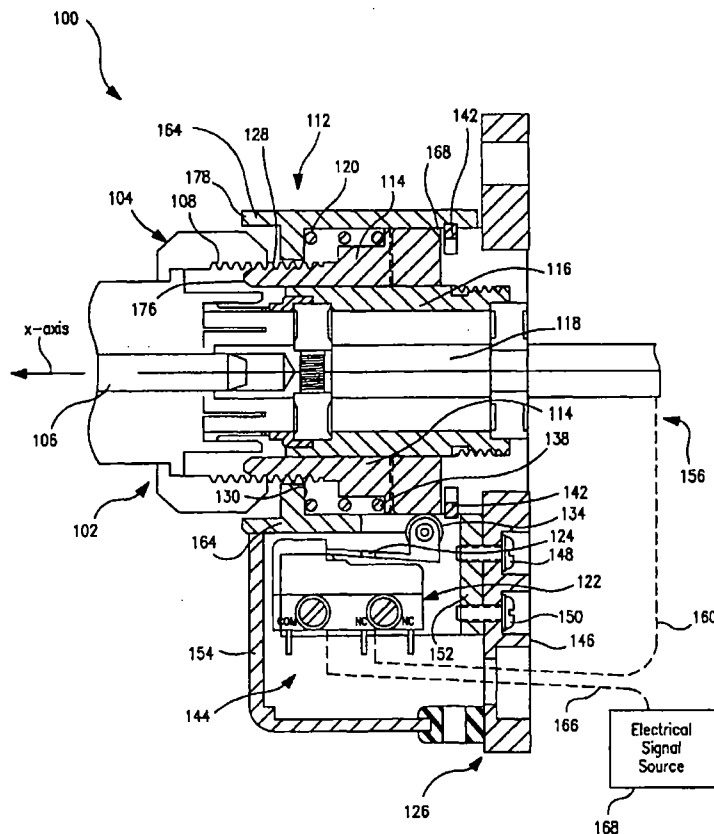

(57) Abstract: A receptacle portion (112) of an electrical connector assembly including an axially movable sleeve (114) biased to a default sleeve position. At the default sleeve position, a switch (122) having a switch arm (124) biased against the axially movable sleeve (114) is in an open condition. Upon mating of the receptacle (112) with a mating plug (102), the sleeve (114) moves axially for moving the switch (122) to a closed position.

WO 02/01679 A1



162162

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.