

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/020888 A2

(51) International Patent Classification⁷: **F16L**

19442 (US). **MATTE, Paul, J.** [US/US]; 24 Oneida Court, Chester Springs, PA 19425 (US). **PENDERGAST, Patrick, M.** [US/US]; 122 Three Ponds lane, Malvern, PA 19355 (US). **ROSS, Dawn, D.** [US/US]; 1003 Highspire Drive, West Chester, PA 19382 (US).

(21) International Application Number:
PCT/US2003/026953

(22) International Filing Date: 28 August 2003 (28.08.2003)

(74) Agents: **CHIONCHIO, John, A.** et al.; Synnestvedt & Lechner LLP, 2600 Aramark Tower, 1101 Market Street, Philadelphia, PA 19107-2950 (US).

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(30) Priority Data:
60/406,607 28 August 2002 (28.08.2002) US
60/476,939 9 June 2003 (09.06.2003) US

(71) Applicant (*for all designated States except US*): **FEDERAL-MOGUL POWERTRAIN, INC.** [US/US]; 26555 Northwestern Highway, Southfield, MI 48034 (US).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **GLADFELTER, Harry, F.** [US/US]; 103 Brian Way, Kimberton, PA

[Continued on next page]

(54) Title: CABLE GUIDE SLEEVING STRUCTURE

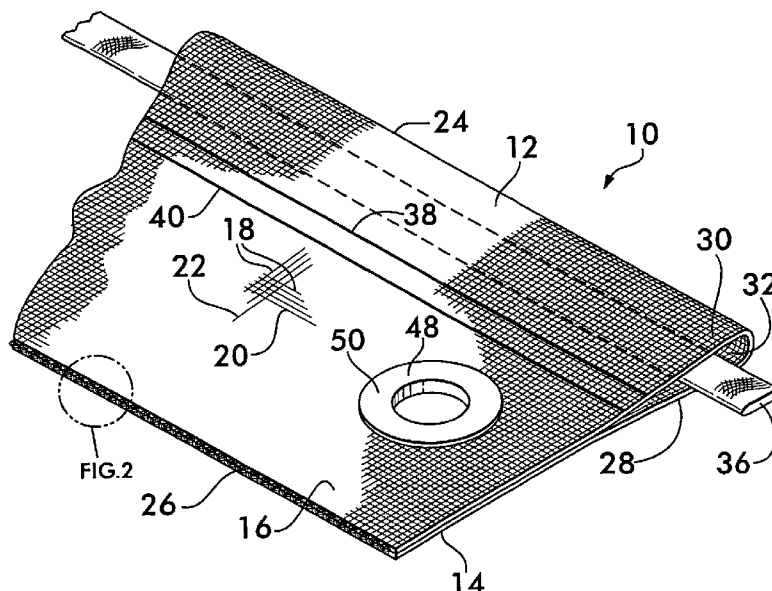

(57) Abstract: An elongated sleeve structure for insertion and protection of elongated items within a duct is disclosed. The sleeve structure is formed from a flexible sleeve woven from warp and fill yarns to produce opposed layers in closely spaced relation. The layers have a common seamless edge and are joined along a second edge by a knit stitch formed by interlooping of successive traverses of the fill yarn which is common to both layers. The layers are of equal width and are resiliently separable into a spaced apart relationship defining a central space which accommodates the elongated items. A pull tape is positioned between the opposed layers for drawing the elongated items through the sleeve central space once the sleeve structure is positioned within the duct. Multiple sleeve structures may be joined together in an assembly using an attachment piece allowing a plurality of sleeve structures to be pulled simultaneously.

WO 2004/020888 A2



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*