

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
11 July 2002 (11.07.2002)


PCT

(10) International Publication Number
WO 02/054603 A3

- (51) International Patent Classification⁷: **H03M 13/25**, H04L 27/18, H03M 13/23, 13/00
- (21) International Application Number: PCT/IB02/00008
- (22) International Filing Date: 4 January 2002 (04.01.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/260,258 8 January 2001 (08.01.2001) US
- (71) Applicant: **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (71) Applicant (for LC only): **NOKIA INC.** [US/US]; 6000 Connection Drive, Irving, TX 75039 (US).
- (72) Inventors: **MIKKOLA, Hannu**; Ippisenkatu 15, FIN-33300 Tampere (FI). **VAINIO, Janne**; Simulantie 8-12 B6, FIN-33880 Lempäälä (FI). **RO-TOLA-PUKKILA, Jani**; Lehvankatu 24 E 44, FIN-33820 Tampere (FI).
- (74) Agents: **MAGUIRE, Francis, J.** et al.; Ware, Fressola, Van Der Sluys & Adolphson LLP, 755 Main Street, P.O. Box 224, Monroe, CT 06468 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR ALLOCATING CONVOLUTIONAL ENCODED BITS INTO SYMBOLS BEFORE MODULATION

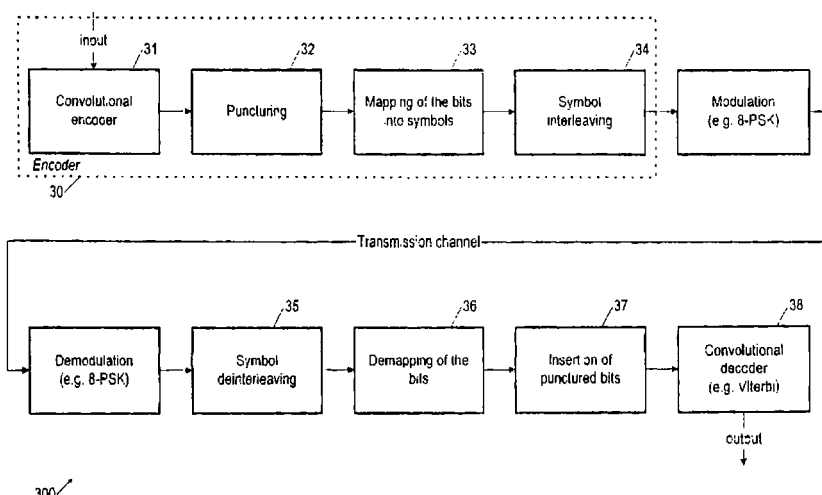

162162

(57) Abstract: A method and corresponding apparatus for encoding a sequence of bits for transmission as symbols, some of the bit positions of the symbols having a higher bit error rate than other bit positions. The method includes: a step (31, 32, 41, 42) of providing a plurality of sequences of bits using a convolutional encoder (31, 41), in response to a sequence of input bits, each sequence of bits being defined by a predetermined generator polynomial having a predetermined level of sensitivity to puncturing; and a step (33, 44) of mapping the bits of each sequence of bits to symbol positions based on the level of sensitivity of the generator polynomial defining the sequence of bits. With interleaving, the mapping of bits of each sequence of bits to symbol positions (33, 44) can precede a symbol interleaving step (34), or it can follow a bit interleaving step (43).

--- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

10 October 2002